
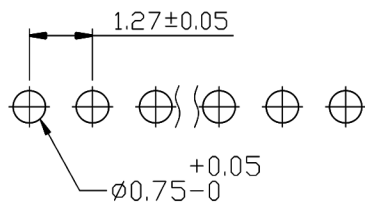
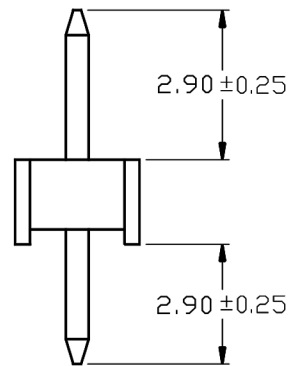
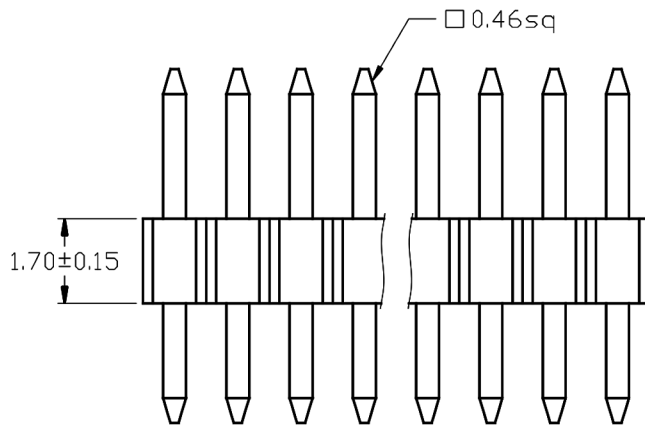


Cir- cuits	Dimension mm	
	L1	L2
2	1.27	2.54
3	2.54	3.81
4	3.81	5.08
5	5.08	6.35
6	6.35	7.62
7	7.62	8.89
8	8.89	10.16
9	10.16	11.43
10	11.43	12.70
11	12.70	13.97
12	13.97	15.24
13	15.24	16.51
14	16.51	17.78
15	17.78	19.05
16	19.05	20.32
17	20.32	21.59
18	21.59	22.86
19	22.86	24.13
20	24.13	25.40
21	25.40	26.67
22	26.67	27.94
23	27.94	29.21
24	29.21	30.48
25	30.48	31.75
26	31.75	33.02
27	33.02	34.29
28	34.29	35.56
29	35.56	36.83
30	36.83	38.10
31	38.10	39.37
32	39.37	40.64
33	40.64	41.91
34	41.91	43.18
35	43.18	44.45
36	44.45	45.72
37	45.72	46.99
38	46.99	48.26
39	48.26	49.53
40	49.53	50.80
41	50.80	52.07
42	52.07	53.34
43	53.34	54.61
44	54.61	55.88
45	55.88	57.15
46	57.15	58.42
47	58.42	59.69
48	59.69	60.96
49	60.96	62.23
50	62.23	63.50

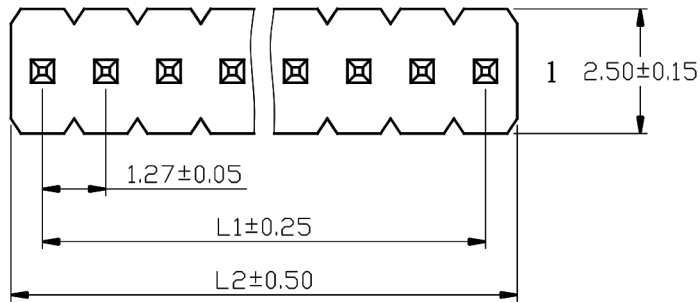

RECOMMENDED P. C. B. LAYOUT

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
1		Ref.	SEP. 25' 17
A		RELEASE	JAN. 19' 18

SPECIFICATIONS

Current Rating:

1 Amp

Voltage Rating:

100V

Insulator resistance:

1000 Megohms Min.

Contact resistance:

20 m ohms Max.

Dielectric withstanding:

AC 500V/minute

Operating Temperature:

-40°~+105°C(6T)

Contact Material:

Brass

Insulator Material:

High Temperature Thermoplastic

+Glass Fibre UL94V-0

Color: Black

Finish:

Gold plated

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ± 0.50	X° ±
.X ± 0.38	.X° ±
.XX ± 0.25	.XX° ±
.XXX ±	.XXX° ±

APPD	
CHKD	
DRAW	Z

PROJECTION

UNITS
MM

SCALE
SIZE
A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
1.27mm Pin Header
Single Row Straight
Dip Type

PART NO.
PHSS**G40-2929-LF-04

CAD NO. I0642A
F:\PDF\PH\PH-0597

SHEET
1 OF 1

圖面編號:GTKGS2453-A(1)