


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	DEC.17.01

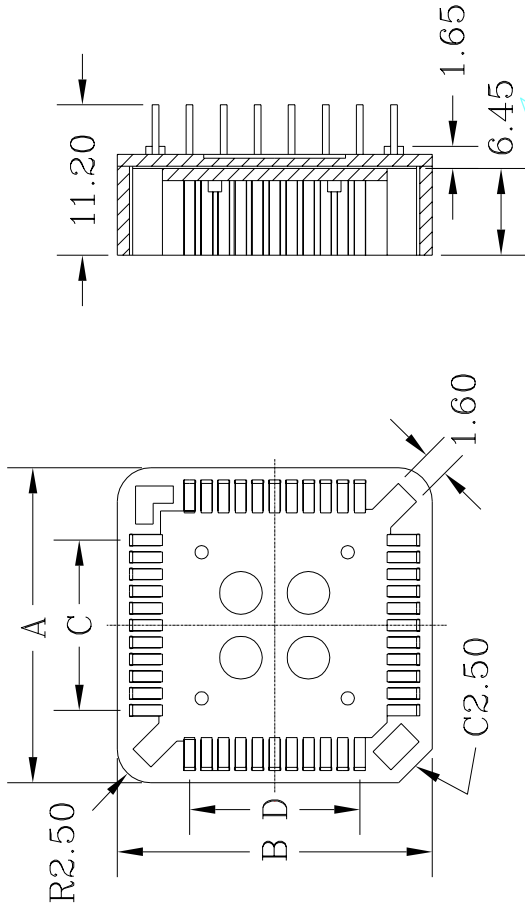


MATERIAL:
 INSULATOR :Hi-temp PBT or PPS:UL 94V-0
 Contact material:phosphor bronze JIS 5210
 Contact Plated :120u"tin over 30u"nickel

SPECIFICATIONS:
 Temperature range:-50°C to 105°C
 CURRENT Rating :1 AMP
 Capacitance:1.0 Picoforads (Max)
 Contact resistance:30 Milliohms (Max)
 Insulation Resistance :1000 Megohmx (Max)
 Withstanding Voltage: AC 600 Vrms

MIDDLE TYPE:

NO OF CONTACT	A±0.15	B±0.15	C±0.1	D±0.1	E±0.1	F±0.1
20 PPS PBT	15.50	15.50	5.08	5.08	5.08	5.08
28 PPS PBT	18.04	18.04	7.62	7.62	7.62	7.62
32 PPS PBT	18.04	20.60	7.62	10.16	7.62	10.16
44 PPS PBT	23.48	23.48	12.70	12.70	12.70	12.70
52 PPS PBT	25.88	25.88	15.24	15.24	15.24	15.24
68 PPS PBT	31.04	31.04	20.32	20.32	20.32	20.32
84 PPS PBT	36.04	36.04	25.40	25.40	25.40	25.40
68 PBT	31.66	31.66	20.32	20.32	20.32	20.32
84 PBT	36.66	36.66	25.40	25.40	25.40	25.40

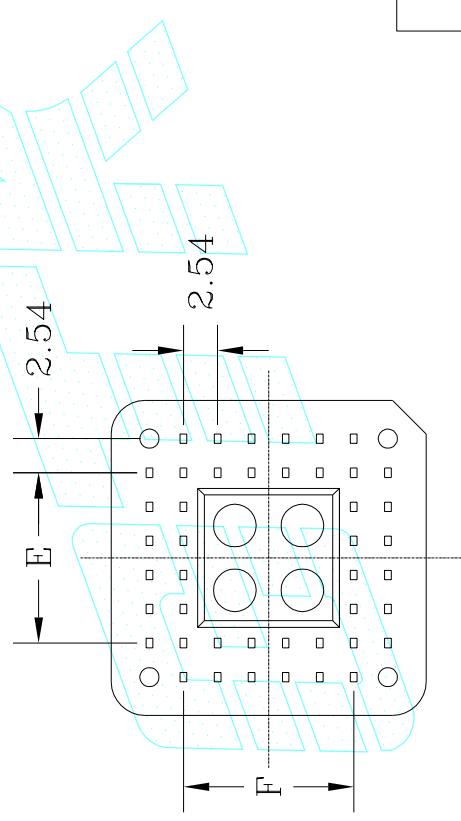

TOLERANCE UNLESS OTHERWISE SPECIFIED		UNITS	SCALE	SIZE
LINEAR	ANGLE			A4
X. ±	X° ± 2			
.X ± 0.25	.X° ±			
.XX ± 0.15	.XX° ±			
.XXX ±	.XXX° ±			
APPD				
CHKD				
DRAW	Tao.Tao.			DEC.17'2001

GOLD-TEK ELECTRIC CO., LTD.		PART NO.	PLCC**TD
TITLE		CAD NO.	1315
PLCC SOCKET DIP TYPE		F:\Drw\SOC\SOC-0135	SHEET 1 OF 1
CPART NO		圖面編號:GTKSD0251-A(1)	

NOTE:
 1.DIMENSIONS MARKED C* TO BE CHECKED
 BY GTK QC