

# Quectel BC95

## Compact NB-IoT Module with Ultra-low Power Consumption



BC95 is a high-performance NB-IoT module with extremely low power consumption. The ultra-compact 23.6mm × 19.9mm × 2.2mm profile makes it a perfect choice for size sensitive applications. Designed to be compatible with Quectel GSM/GPRS M95 module in the compact and unified form factor, it provides a flexible and scalable platform for migrating from GSM/GPRS to NB-IoT networks.

BC95 adopts surface mounted technology, making it an ideal solution for durable and rugged designs. The low profile and small size of LCC package allow BC95 to be easily embedded into space-constrained applications and provide reliable connectivity with the applications. This kind of package is ideally suited for large-scale manufacturing which has strict requirements for cost and efficiency.

Due to compact form factor, ultra-low power consumption and extended temperature range, BC95 is the best choice for a wide range of IoT applications, such as smart metering, bike sharing, smart parking, smart city, security and asset tracking, home appliances, agricultural and environmental monitoring, etc. It is able to provide a complete range of SMS\* and data transmission services to meet client-side demands.



### Key Benefits

- ✓ Compact-sized NB-IoT module
- ✓ Ultra-low power consumption
- ✓ Super high sensitivity
- ✓ LCC package makes it easy for large volume manufacturing
- ✓ Compatible with Quectel GSM/GPRS module, easy for future upgrading
- ✓ Embedded with abundant Internet service protocols
- ✓ Fast time-to-market:  
Reference designs, evaluation tools and timely technical support minimize design-in time and development efforts



Compact Size



B8/B5/B20/B28



Extended Temperature Range: -40°C ~ +85°C



LCC Package



Multiple Serial Ports



Ultra-low Power Consumption




Quectel Enhanced AT Commands



Embedded Internet Services Protocols

# Quectel BC95

## Compact NB-IoT Module with Ultra-low Power Consumption

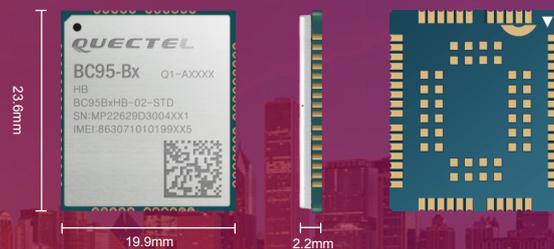

### Frequency Bands

BC95-B8: 900MHz

BC95-B5: 850MHz

BC95-B20: 800MHz

BC95-B28: 700MHz

### Data

**Data Transmission:**

**Single Tone:**

DL: 24Kbps

UL: 15.625kbps

**Multi Tone\*:**

UL: 62.5kbps

DL: 24kbps

**Protocol Stacks:**

IPv4

IPv6\*

UDP

CoAP

LwM2M

Non-IP

DTLS\*

**Download Method:**

UART

DFOTA\*

### SMS\*

Point-to-point MO and MT

Text/PDU Mode

### Electrical Characteristics

**Maximum Output Power:**

23dBm±2dB

**Sensitivity:**

-129dBm±1dB

**Power Consumption (Typical):**

PSM: 3.6uA

Idle: 2mA @DRX=1.28s

**LTE Cat NB1 Connectivity:**

220mA @23dBm (Band 8/5/20)

250mA @23dBm (Band 28)

80mA @12dBm (Band 8/5/20/28)

65mA @0dBm (Band 8/5/20/28)

### Interfaces

USIM × 1

UART × 2

ADC\* × 1

RESET × 1

Antenna × 1

### General Features

LCC Package

94 Pins

**Supply Voltage Range:**

3.1V~4.2V, 3.6V Typ.

**Temperature Range:**

Temperature Range: -40°C ~ +85°C

**Dimension:**

23.6mm × 19.9mm × 2.2mm

**Weight:**

1.8g±0.2g

**AT Command:**

3GPP TS 27.007 V14.3.0 (2017-03) and Quectel

Enhanced AT Commands

### Approvals

RoHS Compliant

CCC/NAL\*/SRRC (China)

CE/GCF (Europe)

RCM (Australia)

FCC\* (North America)

\* Under Development