
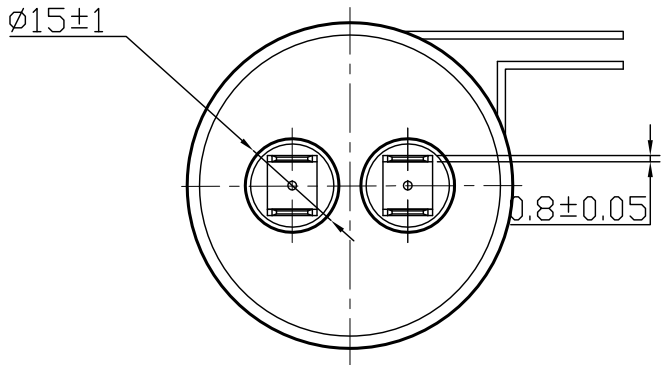
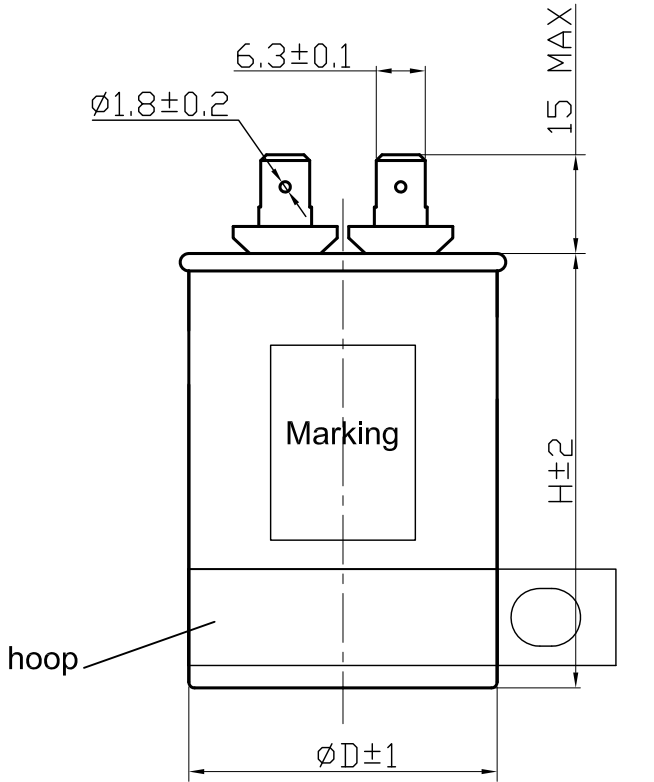


Capacitor requires 12.7mm additional clearance around terminals for interrupter

Cn (μ F)	Un (VAC)	D	H
7.5	440	40	61
10	440	40	61
15	440	40	71

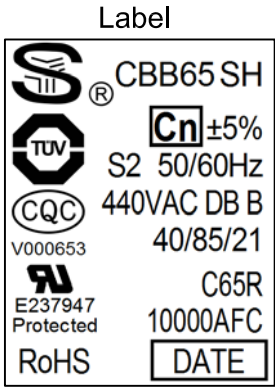

Technology specification:

- 1.Capacitance tolerance: $C_n \pm 5\%$.
- 2.Rated voltage:440VAC.
- 3.Rated frequency:50/60Hz.
- 4.Dissipation factor: ≤ 0.0025 (at 100Hz).
- 5.Test voltage between terminals:2 times of rated voltage/5s.
- 6.Test voltage between terminals and case:2000VAC/2s.
- 7.Maximum permissible overvoltage:110% of the rated voltage.
Maximum permissible overcurrent:130% of the rated current.
- 8.Reference standard:《UL810-2008》、《GB/T 3667.1-2016》、《IEC 60252-1:2013》.
- 9.Work temperature range:-40~70℃.
- 10.Accord with RoHS.
- 11.Class of operation:B(10000h).
- 12.The iron hoops are packed separately.

Unit: mm

						CBB65(C65R)			SHENG YE ELECTRIC CO.,LTD		
									Product Drawing		
Symbol	Amount	Zone	Doc.No.	Signature	Date						
Design	Cen WeiJie	21.03.23	Standard			Design Phases		Weight	Scale	Electronics Source	
Drawing	Cen WeiJie	21.03.23									
Auditing	Huang ZhiYong	21.03.23									
Technics			Approved			Top Page1		Page 1			