

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负法律责任。本公司保留对专利及发明、实用新型和外观设计的所有权利。

FOR-1754 Rev.1.2

2



3

4

5

6

未注公差/General tolerances(mm)												0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20
												±2'

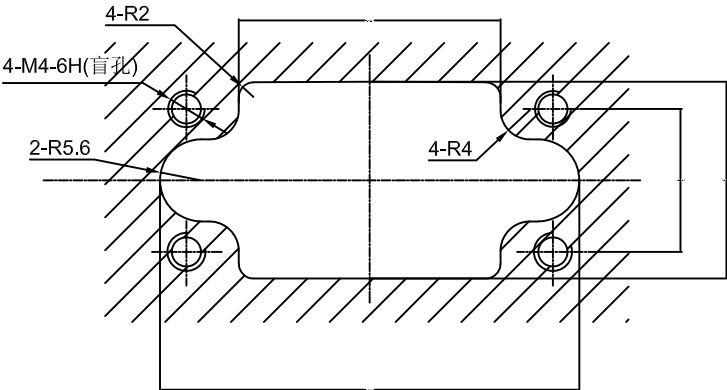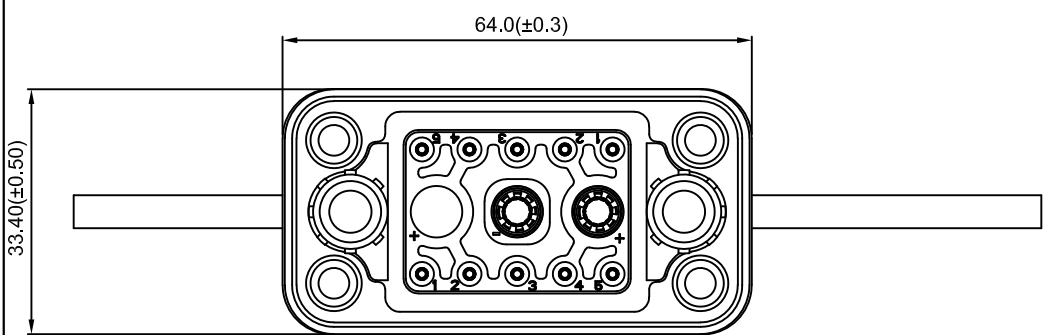

推荐面板开孔尺寸

型号说明

RA-EBB-F-2010-F-L300-00A(H)

插头

组装式

系列名称

母端

通用型环保产品

线长300mm

产品插针数量
功率针2pin,
信号针10pin

额定电压电流/Rated Voltage/Current	72V/60A
绝缘电阻/Insulation resistance	≥500MΩ
插拔次数/Mechanical working life(mating cycles)	5000
耐电压/Withstanding voltage	1500V AC
使用温度范围/Operating temperature(°C)	-40~+105
防水等级/Levels of protection	单边IPX7
接线方式/Terminal	Crimping
导线外径范围/Wire range(mm)	8AWG/22AWG

MATERIAL: /		SURFACE: /	
MAT NO.:		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD:		NAME:	
CHKD:		RA-EBB-F-2010-F-L300-00A(H)	
DRFT: ZCJ 2021.8.20		DRAWING NO.:	
REV		TO	
	SIZE: A4		TYPE: CUSTOMER DRAWING
SCALE: 2:1		SHEET	1/1

A0				
			Xxx XX	20XX.XX.X X
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6