


Raspberry Pi2 Starter kit (HDMI/HDMI)



Specifications:

CPU: Broadcom BCM2836 ARMv7
Quad-Core 900MHz

RAM: LPDDR2 SDRAM 1GB @
450MHz

GPU: Video Core IV 3D Graphic Core

- 4 x USB 2.0 Host port
- Stereo audio out and composite video out via 4-pole 3.5 mm jack (stereo can change to output over HDMI)
- 1 x Micro SD Card slot
- 1 x 10/100 Mbps Fast Ethernet via RJ-45
- Full-size HDMI port
- Camera interface (CSI)
- Display interface (DSI)
- 40-pin GPIO header (GPIO, UART, I2C, SPI, etc.)

Power requirement : 1.8A @ 5V

Power connector : micro USB

OS : Raspbian, Snappy Ubuntu Core, OpenELEC, RaspBMC


The starter kit includes:

- Raspberry Pi 2 [1GB RAM]
- +5V 1A DC adaptor
- Micro USB cable
- HDMI cable
- 8GB micro SD card contains Linux OS
- Acrylic box


Assembly Instructions

Raspberry Pi B+ Flip Box


1

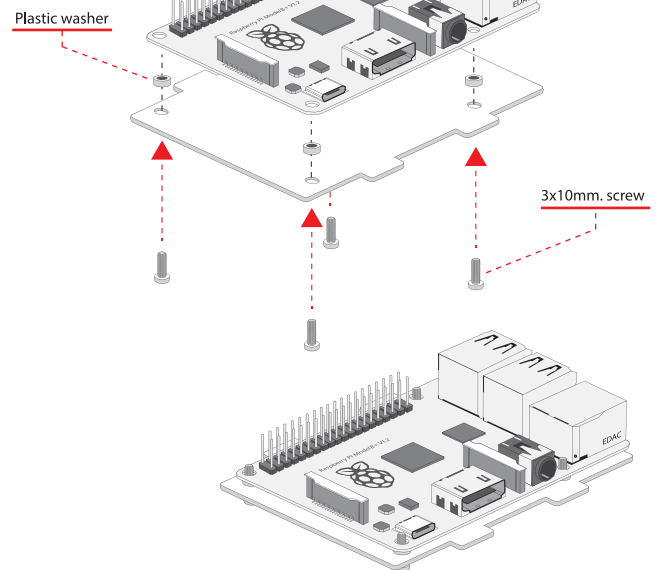


2

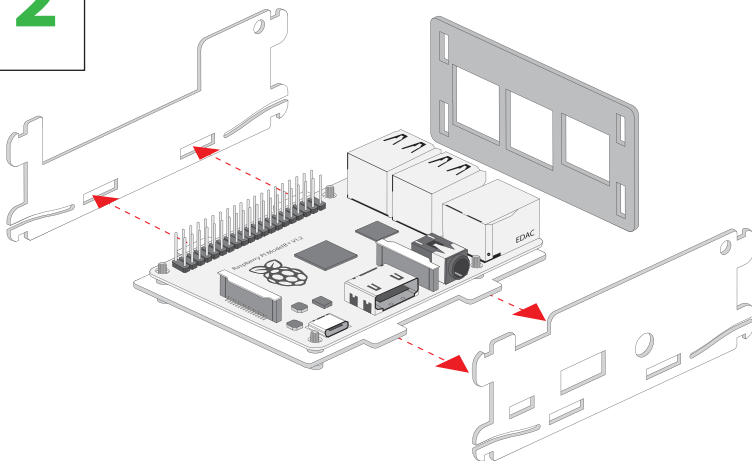

3

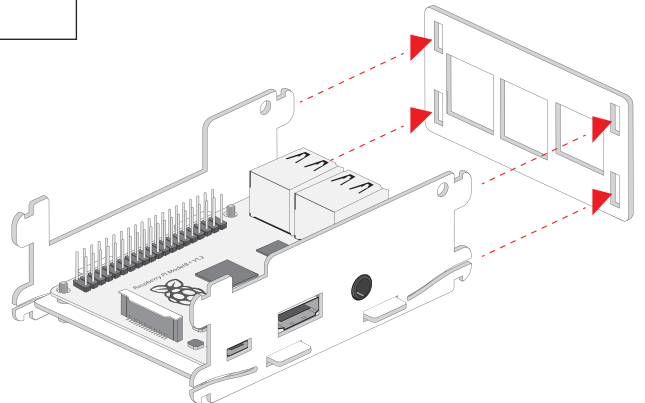

4

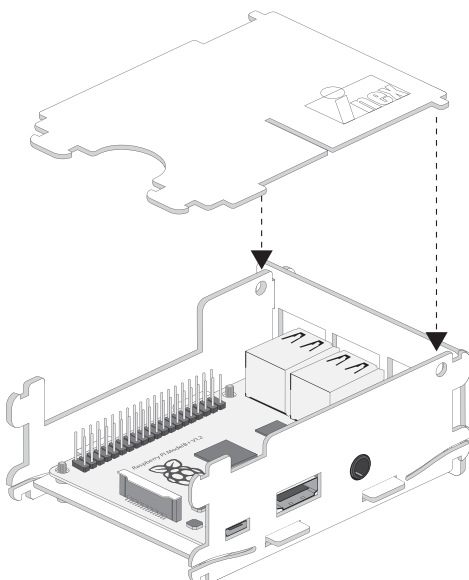

5

