
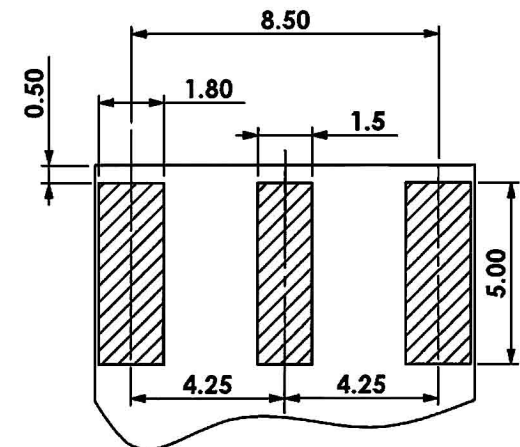
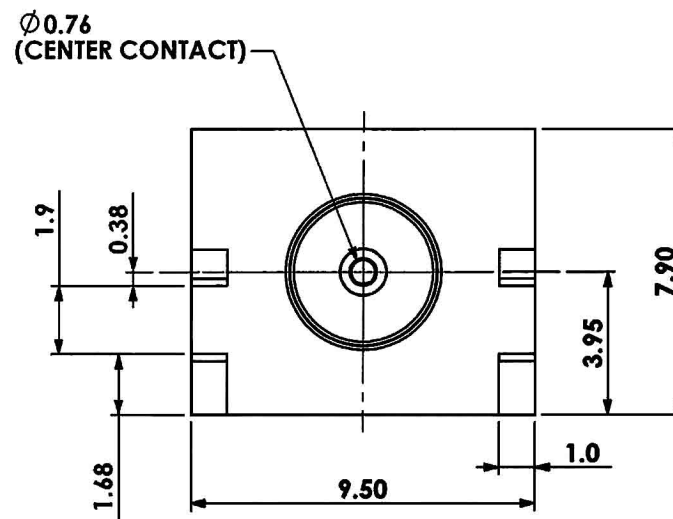


ELECTRICAL RATINGS :

- 1.Impedance : 50 ohms
- 2.Frequency Range : 0~6 GHz
- 3.Working Voltage : 500 Vrms Maximum
- 4.Dielectric Withstanding Voltage : 1000 Vrms Maximum
- 5.VSWR : 1.35 MAX

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAR. 03'16

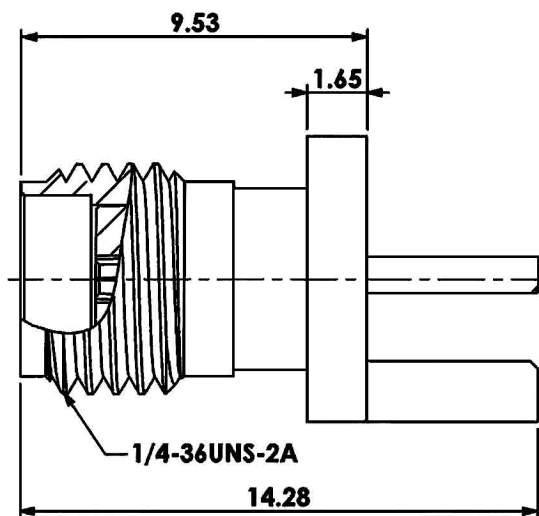

Recommended PCB Layout

3	INSULATOR	TEFLON	Gold
2	Female Cont	Be.Copper	Gold
1	Body	Brass	Gold
Item	Description	Material	Finished

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ± 1.00	X° ±
.X ± 0.50	.X° ±
.XX ± 0.30	.XX° ±
.XXX±	.XXX° ±

APPD	
CHKD	
DRAW	Z
	MAR. 03'2016

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
SMA JACK END LAUNCH
TYPE

CPART NO.

PART NO.

RFS78F7L502GBE

CAD NO. I0083A

F:\PDF\MP\MP-0622

SHEET

1 OF 1

圖面編號:GTKSD3249-A(1)