

RML-23 Series



Special features



Adjustable Angle



High-performance COB light source




Various light colors



Excellent thermal dissipation



Different light distributions



Various sizes

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc



Part number system

RML-23 - C S 22 30 W - 15D
X1 X2 X3 X4 X5 X6 X7

X1=Series
X2=Type
X3= Shape
R=Round
S=Square

X4=Rated power
03= 3 Watts
06= 6 Watts
12= 12 Watts
22= 22 Watts



X5=Color temperature
30=3000 K
40=4000 K
57=5700 K

X6=Shell color
W=White

X7=View angle
15D= 15 °
24D= 24 °
35D= 35 °

RML-23 Series

Dimensions

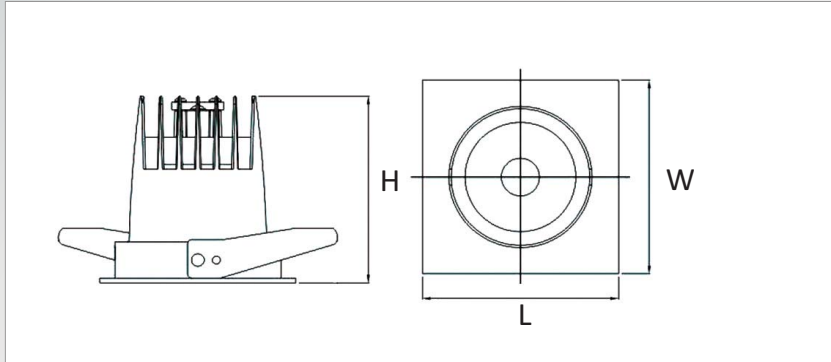

Specifications

Power factor:	≥0.9
Power-Supply Efficiency:	≥88%
Color rendering index:	RA≥75
Using Temperature:	-20°C - 50°C

Rated Power	Part No.	Luminous Flux	Color of light	Color temperature	View angle	Current	Dimensions (WxLxH)	Hole dimension	size
6W	RML-23-AS0630W-15D	443 Lm	Warm White	3000 K	15 °	600 mA/ 10 Vdc	75x75x60 mm.	65x65 mm.	2.5 inch
	RML-23-AS0640W-15D	461 Lm	Neutral White	4000 K					
	RML-23-AS0657W-15D	468 Lm	Daylight	5700 K					
	RML-23-AS0630W-24D	441 Lm	Warm White	3000 K	24 °				
	RML-23-AS0640W-24D	459 Lm	Neutral White	4000 K					
	RML-23-AS0657W-24D	465 Lm	Daylight	5700 K					
	RML-23-AS0630W-35D	438 Lm	Warm White	3000 K	35 °				
	RML-23-AS0640W-35D	455 Lm	Neutral White	4000 K					
	RML-23-AS0657W-35D	462 Lm	Daylight	5700 K					
12W	RML-23-BS1230W-15D	1103 Lm	Warm White	3000 K	15 °	300 mA/ 37 Vdc	85x85x82 mm.	75x75 mm.	3 inch
	RML-23-BS1240W-15D	1214 Lm	Neutral White	4000 K					
	RML-23-BS1257W-15D	1181 Lm	Daylight	5700 K					
	RML-23-BS1230W-24D	1161 Lm	Warm White	3000 K	24 °				
	RML-23-BS1240W-24D	1278 Lm	Neutral White	4000 K					
	RML-23-BS1257W-24D	1243 Lm	Daylight	5700 K					
	RML-23-BS1230W-35D	1160 Lm	Warm White	3000 K	35 °				
	RML-23-BS1240W-35D	1277 Lm	Neutral White	4000 K					
	RML-23-BS1257W-35D	1242 Lm	Daylight	5700 K					
22W	RML-23-CS2230W-15D	1696 Lm	Warm White	3000 K	15 °	600 mA/ 37 Vdc	125x125x101.6 mm.	110x110 mm.	4.5 inch
	RML-23-CS2240W-15D	1815 Lm	Neutral White	4000 K					
	RML-23-CS2257W-15D	1828 Lm	Daylight	5700 K					
	RML-23-CS2230W-24D	1724 Lm	Warm White	3000 K	24 °				
	RML-23-CS2240W-24D	1844 Lm	Neutral White	4000 K					
	RML-23-CS2257W-24D	1858 Lm	Daylight	5700 K					
	RML-23-CS2230W-35D	1652 Lm	Warm White	3000 K	35 °				
	RML-23-CS2240W-35D	1768 Lm	Neutral White	4000 K					
	RML-23-CS2257W-35D	1781 Lm	Daylight	5700 K					