


RML-24 Series



Special features



Adjustable Angle



High-performance COB light source




Various light colors



Excellent thermal dissipation




Different light distributions



Various sizes

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc

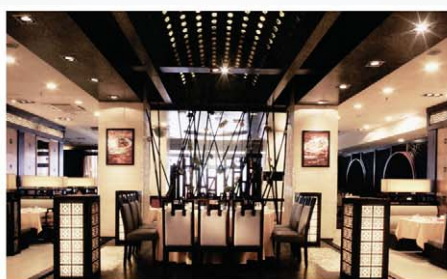

Part number system

RML-24 - A R 16 30 W - 15D
X1 X2 X3 X4 X5 X6 X7

X1=Series
X2=Type
X3= Shape
R=Round
S=Square

X4=Rated power
06=6 Watts
16=16 Watts
22= 22 Watts
30= 30 Watts



X5=Color temperature
30=3000 K
40=4000 K
57=5700 K

X7=View angle
15D= 15 °
24D= 24 °
35D= 35 °

X6=Shell color
W=White

RML-24 Series

Dimensions



Dimensions: $\Phi 115 \times 78$ mm.

Cut-Out: $\Phi 100$ mm.



$\Phi 100$

Specifications


Specifications RML-24 (16W)

Rated power	16 W
Current	450 mA/37 Vdc
Light source	Edison HM13
Optical system	$\Phi 52$ Len


Illuminance for different color

Product Part Number	Beam Angle	Color	Color Temperature	Luminous Flux
RML-24-AR1630W-15D	15 °	Warm White	3000 K	1391 Lm
RML-24-AR1640W-15D		Neutral White	4000 K	1461 Lm
RML-24-AR1657W-15D		Daylight	5700 K	1427 Lm
RML-24-AR1630W-24D	24 °	Warm White	3000 K	1418 Lm
RML-24-AR1640W-24D		Neutral White	4000 K	1489 Lm
RML-24-AR1657W-24D		Daylight	5700 K	1455 Lm
RML-24-AR1630W-35D	35 °	Warm White	3000 K	1383 Lm
RML-24-AR1640W-35D		Neutral White	4000 K	1453 Lm
RML-24-AR1657W-35D		Daylight	5700 K	1419 Lm


Light distribution curve




COB 3000K




EDISON COB 16W 1391.4lm




EDISON COB 16W 1418.5lm




EDISON COB 16W 1383.8lm




COB 4000K




EDISON COB 16W 1461lm




EDISON COB 16W 1489.4lm




EDISON COB 16W 1453lm




COB 5700K



EDISON COB 16W 1427.6lm



EDISON COB 16W 1455.4lm



EDISON COB 16W 1419.8lm