

RML-25 Series



Special features



Adjustable Angle



High-performance COB light source




Various light colors



Excellent thermal dissipation



Different light distributions



Various sizes

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc



Part number system

RML-25 - B S 22 30 W - 15D
X1 X2 X3 X4 X5 X6 X7

X1=Series
X2=Type
X3= Shape
R=Round
S=Square

X4=Rated power
12= 12 Watts
22= 22 Watts
30= 30 Watts



X5=Color temperature
30=3000 K
40=4000 K
57=5700 K

X7=View angle
15D= 15 °
24D= 24 °
35D= 35 °

X6=Shell color
W=White

RML-25 Series

Dimensions

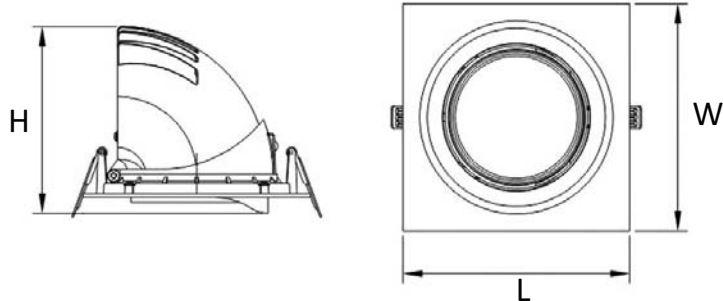

Specifications

Power factor:	≥0.5
Power-Supply Efficiency:	≥84%
Color rendering index:	RA≥80
Using Temperature:	-20°C - 50°C

Rated Power	Part No.	Luminous Flux	Color of light	Color temperature	View angle	Current	Dimensions (WxLxH)	Hole dimension	size
12W	RML-25-AS1230W-15D	1103 Lm	Warm White	3000 K	15 °	300 mA/ 37 Vdc	120x120x94 mm.	105x105 mm.	4 inch
	RML-25-AS1240W-15D	1214 Lm	Neutral White	4000 K					
	RML-25-AS1257W-15D	1181 Lm	Daylight	5700 K					
	RML-25-AS1230W-24D	1161 Lm	Warm White	3000 K	24 °				
	RML-25-AS1240W-24D	1278 Lm	Neutral White	4000 K					
	RML-25-AS1257W-24D	1243 Lm	Daylight	5700 K					
	RML-25-AS1230W-35D	1160 Lm	Warm White	3000 K	35 °				
	RML-25-AS1240W-35D	1277 Lm	Neutral White	4000 K					
	RML-25-AS1257W-35D	1242 Lm	Daylight	5700 K					
22W	RML-25-BS2230W-15D	1696 Lm	Warm White	3000 K	15 °	600 mA/ 37 Vdc	145x145x119 mm.	130x130 mm.	5 inch
	RML-25-BS2240W-15D	1815 Lm	Neutral White	4000 K					
	RML-25-BS2257W-15D	1828 Lm	Daylight	5700 K					
	RML-25-BS2230W-24D	1724 Lm	Warm White	3000 K	24 °				
	RML-25-BS2240W-24D	1844 Lm	Neutral White	4000 K					
	RML-25-BS2257W-24D	1858 Lm	Daylight	5700 K					
	RML-25-BS2230W-35D	1652 Lm	Warm White	3000 K	35 °				
	RML-25-BS2240W-35D	1768 Lm	Neutral White	4000 K					
	RML-25-BS2257W-35D	1781 Lm	Daylight	5700 K					
30W	RML-25-CS3030W-15D	2282 Lm	Warm White	3000 K	15 °	800 mA/ 37 Vdc	170x170x148 mm.	150x150 mm.	5.5 inch
	RML-25-CS3040W-15D	2355 Lm	Neutral White	4000 K					
	RML-25-CS3057W-15D	2357 Lm	Daylight	5700 K					
	RML-25-CS3030W-24D	2172 Lm	Warm White	3000 K	24 °				
	RML-25-CS3040W-24D	2241 Lm	Neutral White	4000 K					
	RML-25-CS3057W-24D	2244 Lm	Daylight	5700 K					
	RML-25-CS3030W-35D	2170 Lm	Warm White	3000 K	35 °				
	RML-25-CS3040W-35D	2240 Lm	Neutral White	4000 K					
	RML-25-CS3057W-35D	2242 Lm	Daylight	5700 K					