

RML-26 Series



Special features



Adjustable Angle



High-performance COB light source




Various light colors



Excellent thermal dissipation



Different light distributions



Various sizes

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc



Part number system

RML-26 - 6 S 30 30 W - 50D
X1 X2 X3 X4 X5 X6 X7

X1=Series
X2=Type
X3= Shape
R=Round
S=Square

X4=Rated power
12=12 Watts
22=22 Watts
30=30 Watts
45=45 Watts



X5=Color temperature
30=3000 K
40=4000 K
57=5700 K

X6=Shell color
W=White

X7=View angle
50D= 50 °

RML-26 Series

Dimensions

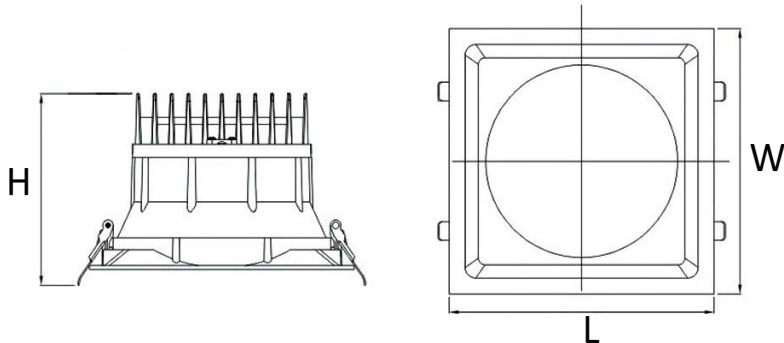

Specifications

Power factor:	≥0.5
Power-Supply Efficiency:	≥85%
Color rendering index:	RA≥80
Using Temperature:	-20°C - 50°C
View angle :	50 °

Rated Power	Part No.	Luminous Flux	Color of light	Color temperature	Current	Dimensions (WxLxH)	Hole dimension	size
12W	RML-26-3S1230W-50D	924 Lm	Warm White	3000 K	350 mA/ 37 Vdc	105x105x99.5 mm.	90x90 mm.	3.5x3.5 inch
	RML-26-3S1240W-50D	1016 Lm	Neutral White	4000 K				
	RML-26-3S1257W-50D	988 Lm	Daylight	5700 K				
22W	RML-26-4S2230W-50D	1663 Lm	Warm White	3000 K	600 mA/ 37 Vdc	140x140x130 mm.	120x120 mm.	4.5x4.5 inch
	RML-26-4S2240W-50D	1779 Lm	Neutral White	4000 K				
	RML-26-4S2257W-50D	1796 Lm	Daylight	5700 K				
30W	RML-26-6S3030W-50D	2136 Lm	Warm White	3000 K	800 mA/ 37 Vdc	200x200x144.3 mm.	180x180 mm.	7x7 inch
	RML-26-6S3040W-50D	2205 Lm	Neutral White	4000 K				
	RML-26-6S3057W-50D	2209 Lm	Daylight	5700 K				
45W	RML-26-8S4530W-50D	4619 Lm	Warm White	3000 K	1200 mA/ 37 Vdc	240x240x171 mm.	215x215 mm.	8.5x8.5 inch
	RML-26-8S4540W-50D	4767 Lm	Neutral White	4000 K				
	RML-26-8S4557W-50D	4776 Lm	Daylight	5700 K				