
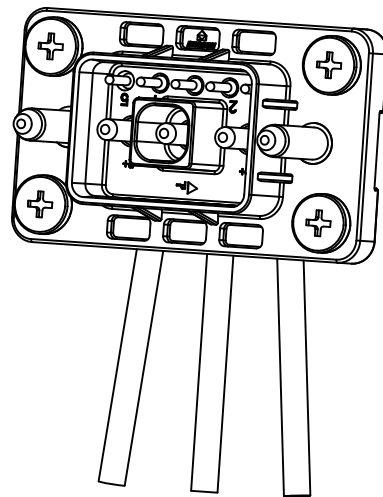
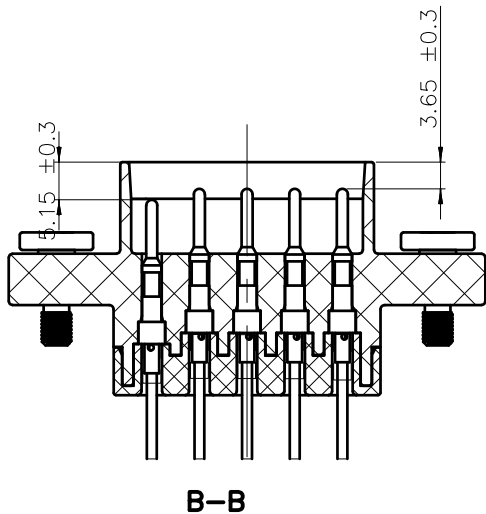
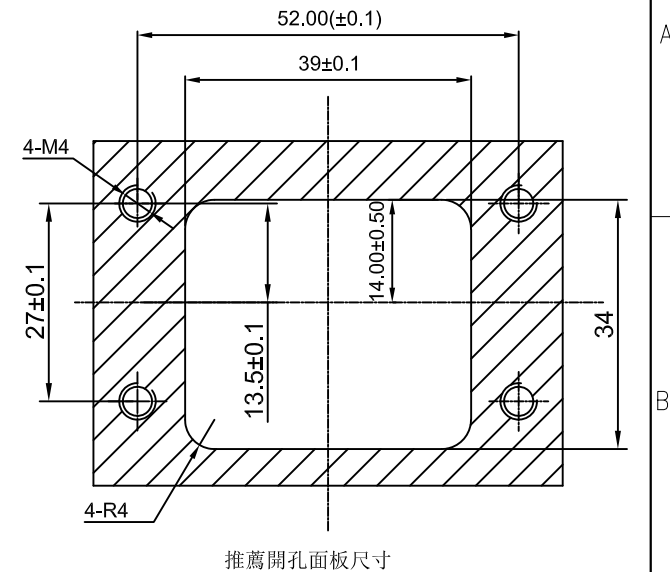
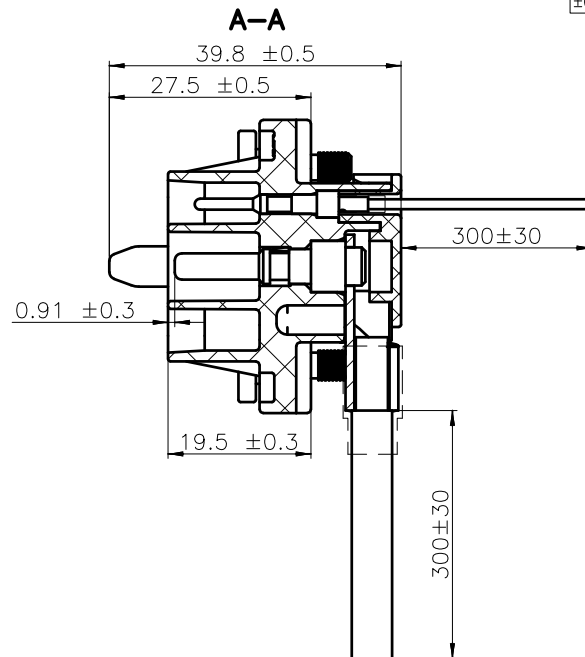


未注公差/General tolerances(mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

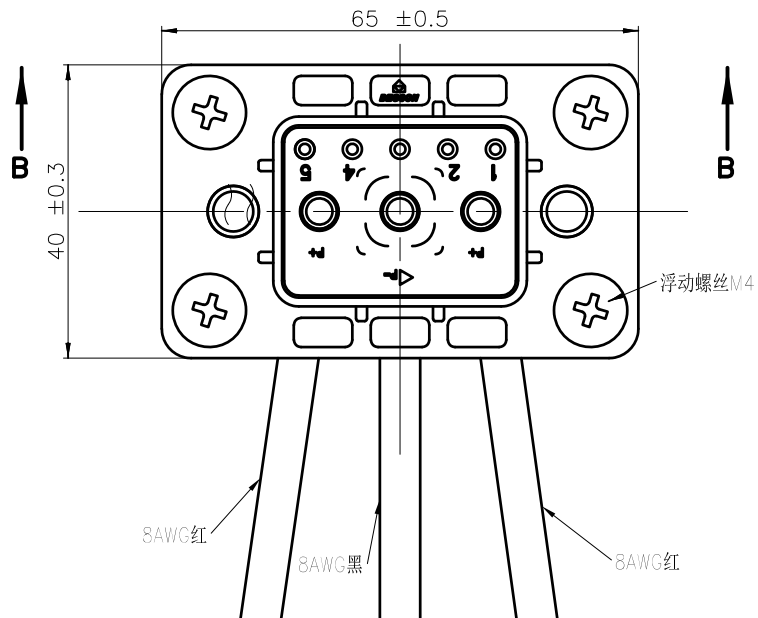

額定電壓電流/Rated Voltage/Current	72V/60A
絕緣電阻/Insulation resistance	≥500MΩ
插拔次數/Mechanical working life(mating cycles)	5000
耐電壓/Withstanding voltage	1500V AC
使用溫度範圍/Operating temperature(°C)	-40~+105
防水等級/Levels of protection	
接線方式/Terminal	Crimping
導線範圍/Wire range(mm)	8AWG/22AWG

MATERIAL: /		SURFACE: /	
MAT NO.:		 寧波高松電子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD:		NAME: SA-EBBF-3005-M-L300-00A(H)	
CHKD:		DRAWING NO.: 25040000002	
DRFT: HuangJ 2021.8.20		REV	T0
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 2:1 SHEET 1/1