
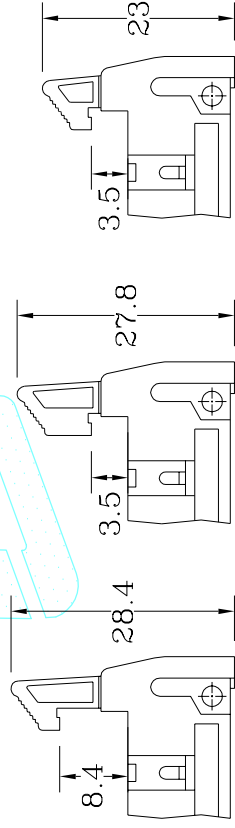


RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

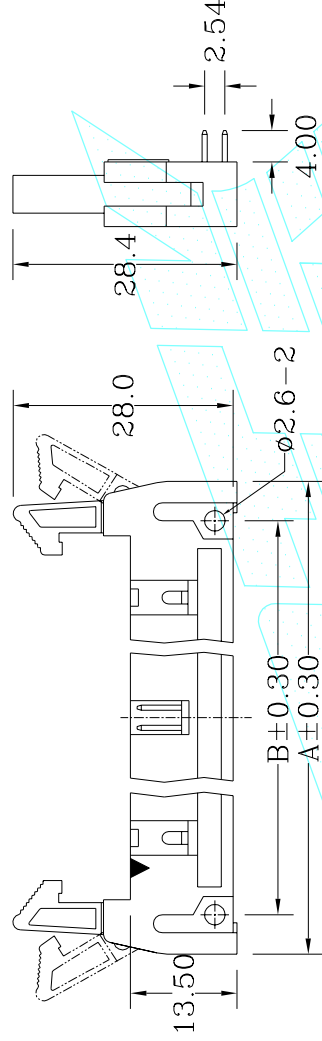

standard latch
PART_NO:
SCP**GS11

short latch
PART_NO:
SCP**GS11/S

short short latch
PART_NO:
SCP**GS11/SS

MATERIALS

HOUSING: NYLON 6T (UL 94V-0), BLACK.

TERMINAL: S.Q. 0.50mm BRASS, GOLD PLATING.

SPECIFICATION

CURRENT RATING: 1 AMP. MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 800V AC R.M.S.



FOR ONE MINUTE.

INSULATION RESISTANCE: 5000M OHMS MIN.AT 500V DC.

OPERATING TEMPERATURE: -55°C TO +105°C.

REV	ECN NO.	DESCRIPTION	DATE
A	I627:H301-10	RELEASE	JAN.07.02

Number Of Position	DIMENSIONS		
	A	B	C
10	32.00	21.84	10.16
14	37.08	26.92	15.24
16	39.62	29.46	17.78
20	44.70	34.54	22.86
24	49.78	39.62	27.94
26	52.32	42.16	30.48
30	57.40	47.24	35.56
34	62.48	52.32	40.64
40	70.10	59.94	48.26
50	82.80	72.64	60.96
60	95.50	85.34	73.66
64	100.58	90.42	78.74



TOLERANCE UNLESS OTHERWISE SPECIFIED		ANGLE	UNITS
LINEAR			
X. ±	X° ±	3°	MM
X. ±	0.3	X° ±	
.XX ±	0.2	.XX° ±	
.XXX±	.XXX±		SCALE
APPD			SIZE
CHKD			
DRAW	Tao.Tao.	JAN.07.2002	A4

TITLE	PART NO.
P.C BOARD HEADER CONNECTOR WITH LATCH 90° PITCH:2.54 ROW TO ROW:2.54	SCP**GR11 (/S)/(SS)
CPART NO	CAD NO. 1627
	F:\Drw\PH\PH-0136

GOLD-TEK ELECTRIC CO., LTD.

SHEET
1 OF 1

圖面編號:GTKSD0890-A(1)