


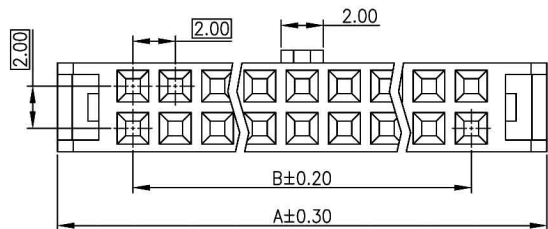
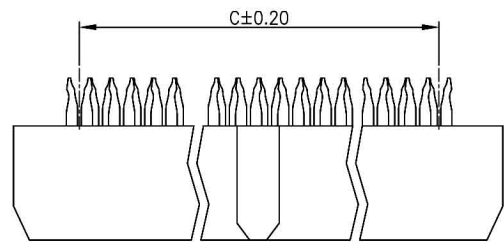
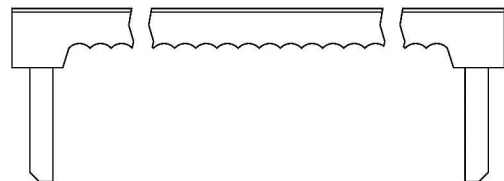




Dimensions			
Pos.	A	B	C
06	11.14	4.00	5.00
08	13.14	6.00	7.00
10	15.14	8.00	9.00
12	17.14	10.00	11.00
14	19.14	12.00	13.00
16	21.14	14.00	15.00
18	23.14	16.00	17.00
20	25.14	18.00	19.00
22	27.14	20.00	21.00
24	29.14	22.00	23.00
26	31.14	24.00	25.00
28	33.14	26.00	27.00
30	35.14	28.00	29.00
34	39.14	32.00	33.00
36	41.14	34.00	35.00
38	43.14	36.00	37.00
40	45.14	38.00	39.00
44	49.14	42.00	43.00
48	53.14	46.00	47.00
50	55.14	48.00	49.00
60	65.14	58.00	59.00
64	69.14	62.00	63.00

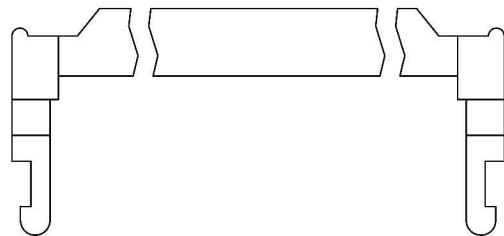

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	OCT.26.06

Material and Finish

1. Housing: Thermoplastic (UL94V-0), Black.
2. Terminal: Copper Alloy, Gold Plating.

Electrical Characteristics

1. Current Rating: 1.0 Amp. Max..
2. Dielectric Withstand Voltage:
500V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 500V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: -40°C ~ +105°C

SC ** T * 22-1C/RH
1 2

1. NO OF POSITION
06 ~ 64
2. OPTION ON STRAIN RELIEF
A - WITH STRAIN RELIEF
B - W/O STRAIN RELIEF

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS	TITLE	PART NO.
X. ±	X° ± 1°		2.0mm IDC SOCKET	SC**T*22-1C/RH
.X ± 0.30	.X° ±	mm		CAD NO. I627
.XX ± 0.20	.XX° ±			SHEET
.XXX ± 0.10	.XXX° ±	SCALE	CPART NO	1 OF 1
APPD		SIZE		
CHKD		A4		
DRAW	Tao.Tao. OCT.26.2006			

圖面編號: GTKSD2006-A(1)