

RoHS COMPLIANT




REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JAN. 10'02
B		ADD. RoHS	FEB. 04'08
C		MODIFY P/N	MAR. 07'11
D		MODIFY DIM.	JUN. 14' 19

■ SPECIFICATIONS


- Voltage Rating : 125 V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000M Ω min
- Temperature Range : - 40°C to +105°C
- Contact Resistance : 20m Ω max

■ TERMINAL


- Applicable Wires : AWG# 22-28
- Material : Brass
- Finish * : T = Tin Plated; G = Gold Plated
- Thickness : 0.2mm
- Q' ty : 10000 pcs./Reel

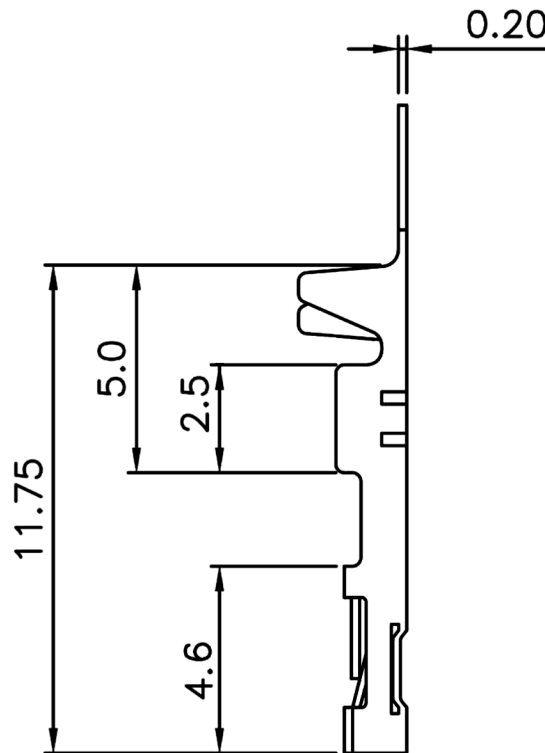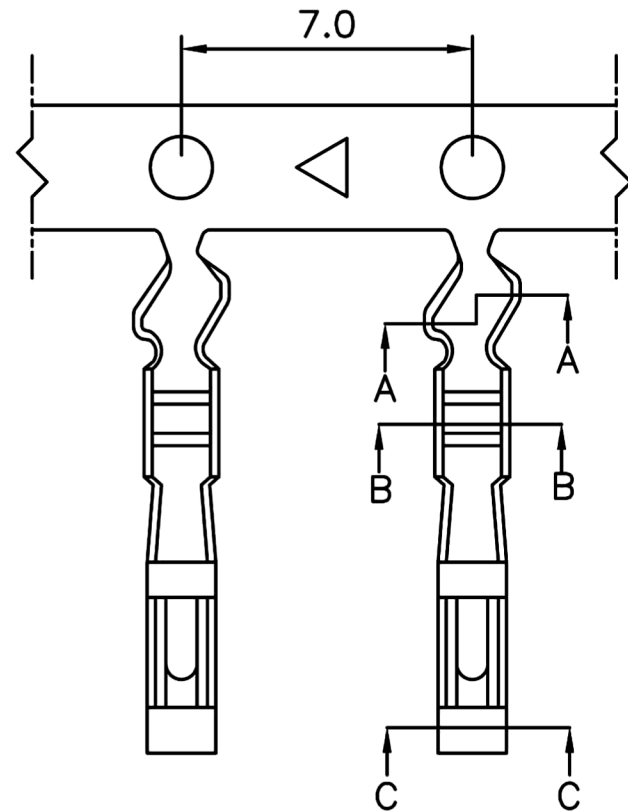

A-A SEC



B-B SEC



C-C SEC

TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ± 0.30	.X° ±
.XX ± 0.20	.XX° ±
.XXX ±	.XXX° ±
APPD	
CHKD	
DRAW	Z

PROJECTION

UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
 TERMINAL FOR 2.54MM
 1108 & 1105

PART NO.
 1108*

CAD NO.
 F:\PDF\HW\HW-A0008

SHEET
 1 OF 1

CPART NO.

圖面編號: GTKSD0013-D(1)