


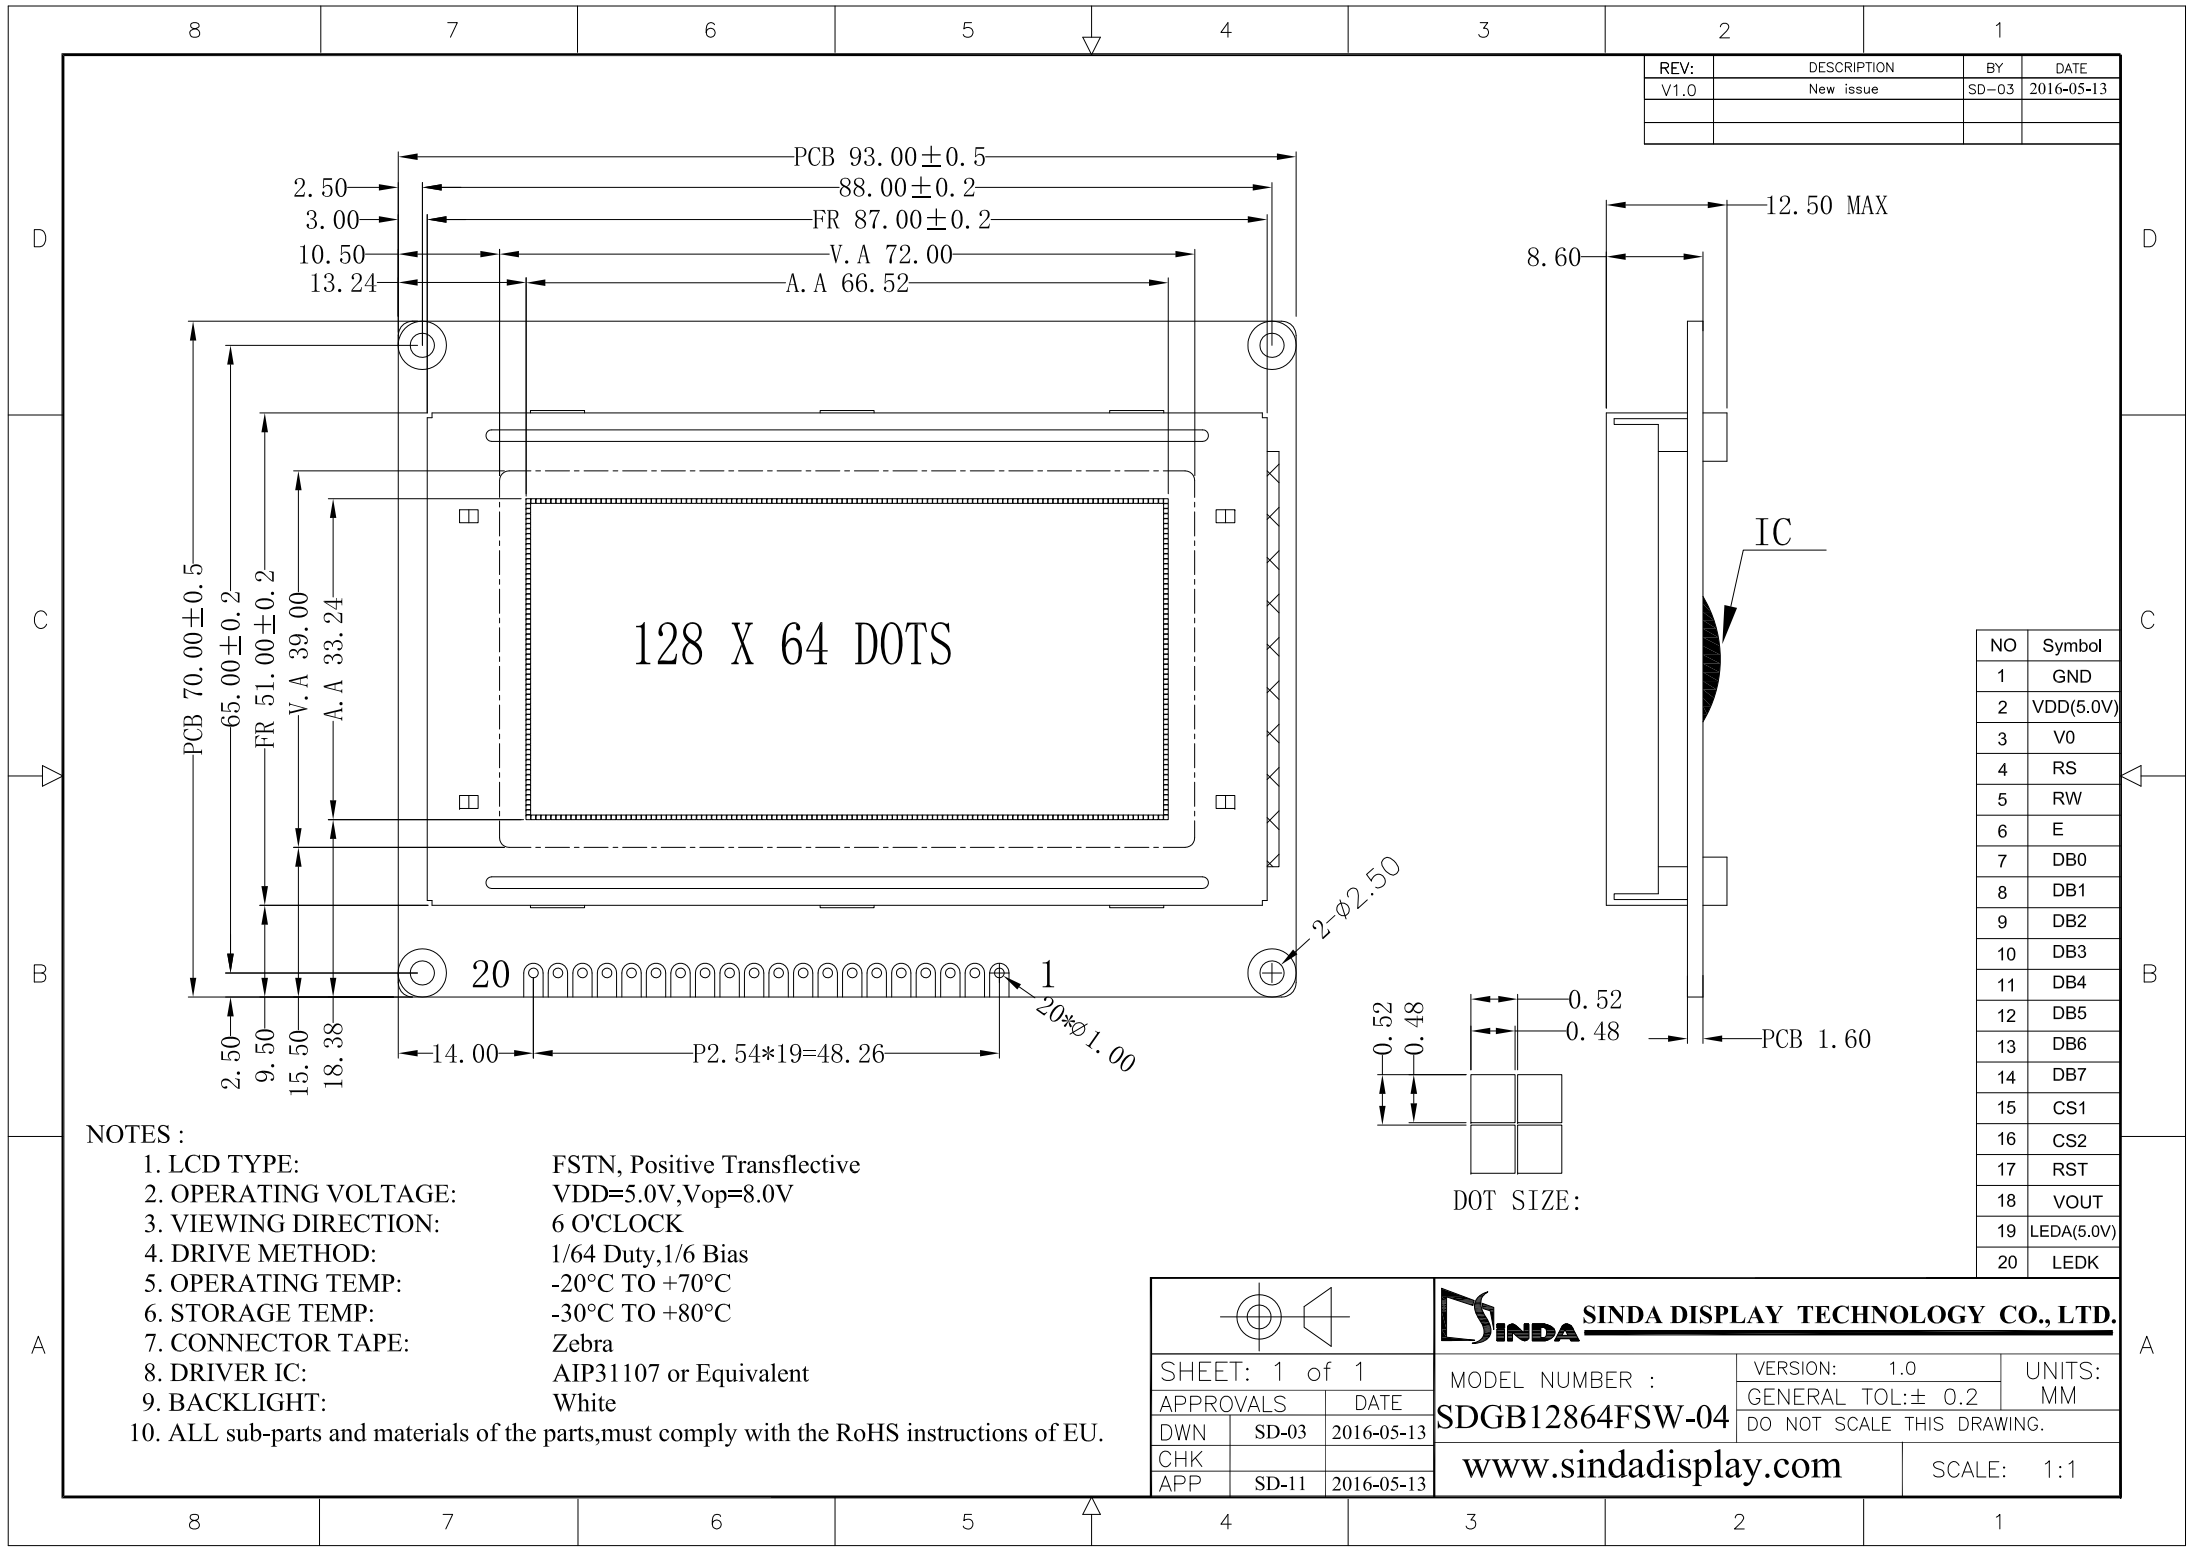


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-03	2016-05-13

NO	Symbol
1	GND
2	VDD(5.0V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	RST
18	VOUT
19	LEDA(5.0V)
20	LEDK

- NOTES :
- 1. LCD TYPE: FSTN, Positive Transflective
 - 2. OPERATING VOLTAGE: VDD=5.0V, Vop=8.0V
 - 3. VIEWING DIRECTION: 6 O'CLOCK
 - 4. DRIVE METHOD: 1/64 Duty, 1/6 Bias
 - 5. OPERATING TEMP: -20°C TO +70°C
 - 6. STORAGE TEMP: -30°C TO +80°C
 - 7. CONNECTOR TAPE: Zebra
 - 8. DRIVER IC: AIP31107 or Equivalent
 - 9. BACKLIGHT: White
 - 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

**SINDA DISPLAY TECHNOLOGY CO., LTD.**



SHEET: 1 of 1

APPROVALS

DATE

DWN

SD-03

2016-05-13

CHK

SD-11

2016-05-13

APP

SD-11

2016-05-13

MODEL NUMBER :

SDGB12864FSW-04

VERSION: 1.0

UNITS: MM

GENERAL TOL: ± 0.2

DO NOT SCALE THIS DRAWING.

www.sindadisplay.com

SCALE: 1:1