
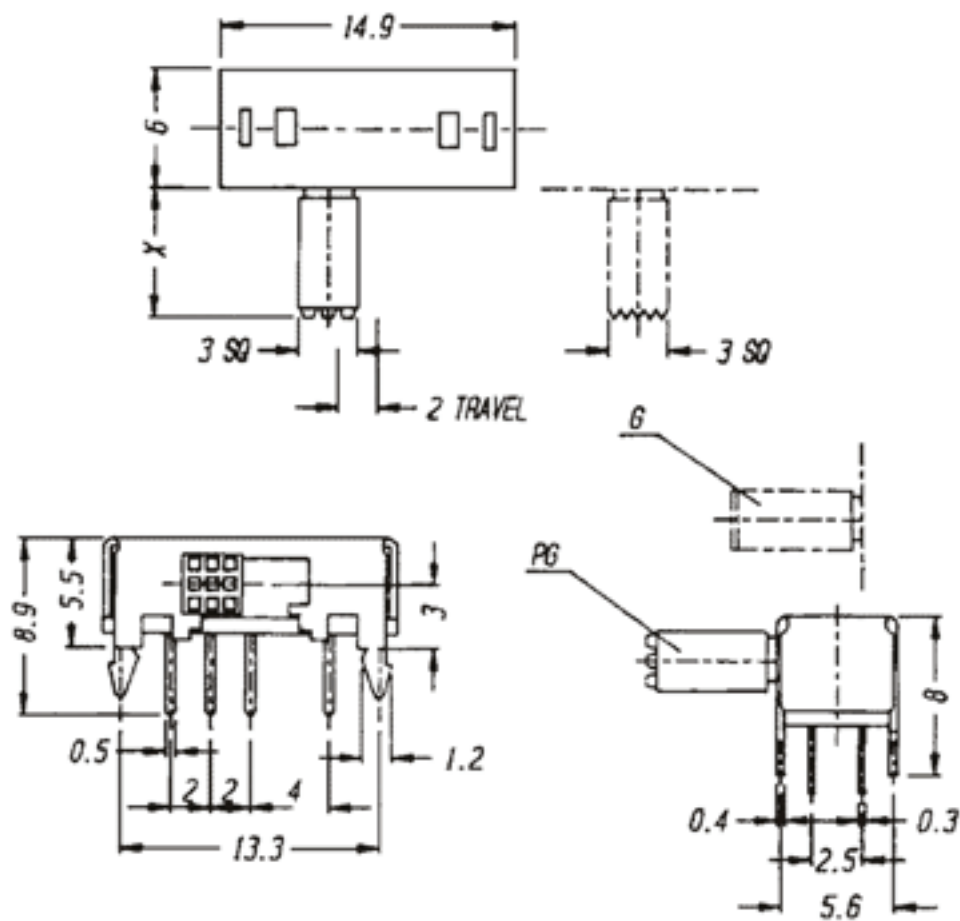



SK-23D06 (L3R1) (2P3T)

Rating:
0.3A 50V DC

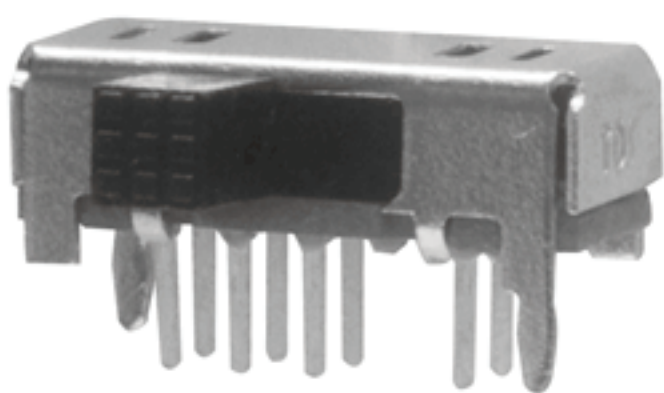

Code Explanation 型号说明
For Series:SS, SK, TS, PS, MS, MK

Series 系列

Pole 刀(接码的个数)

Throw 掷(停档的位数)

SS - 2 4 D 01 - G 9 - L1R3 - AF - NT - N - 500gf

Travelling 行程

C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Sequential No. 排列序号

Knob Height 柄长度

Measuring from Top of the shell

针脚方向

L1R3	L3R1

单排针方向

AF	AB	SP

Tapping 孔类型

NT(3)	T2	T2.6	T3
Non-Tapping 不攻牙(孔径φ3)	2.0mm 攻牙	2.6mm 攻牙	3.0mm 攻牙

Timing(Optional) 切换类别

S	NS	()
Shorting 短路	Non-Shorting 非短路	Non-Specified 不指示

Oprating Force 操作力度

100gf to 800gf
100克 到 800克
按客户要求According to customers' demand

Knob Type 柄形						

General Specification 一般规格
For Series: SS, SK, MS, MK, TS, PS

Rating	使用功率	AS Per Individual Specification
Contact Resistance	接触电阻	50MΩ max.
Insulation Resistance	绝缘电阻	100MΩ at 500V DC
Withstand Voltage	抵抗电压	AC 500V For 1 minute
Operating Force	操作力	AS Per Individual Specification
Switching Life	使用寿命	10,000 Cycles Min.Unloading 15~18 Cycles Per Min.