

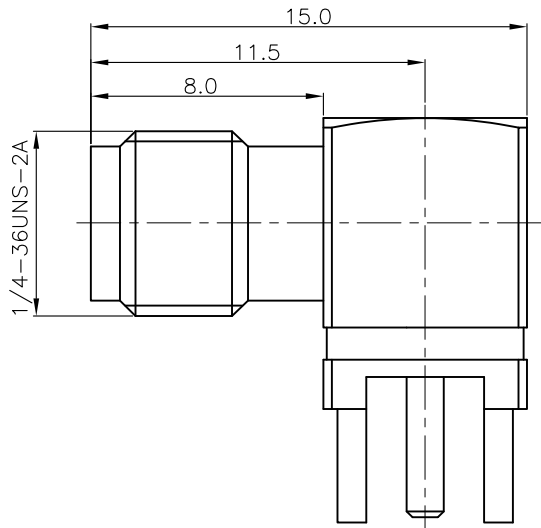
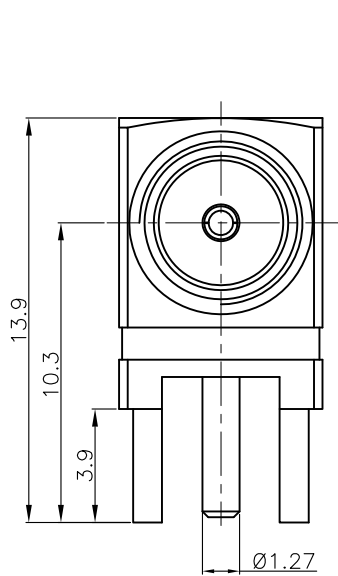


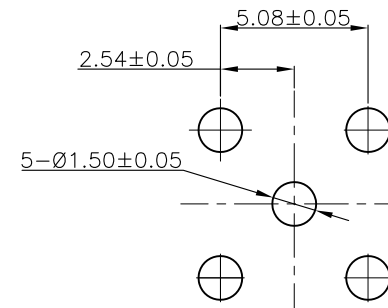

Specifications:
 Impedance:50Ω
 Frequency Range:0~6GHz
 Withstanding Voltage:1000V
 Durability:500 Cycles Min.
 Temperature Range:-40°C To +155°C


Material and Finish
 Body:Brass
 Plating:Gold Plated
 Contact:Beryllium Copper
 Plating:Gold Plated
 Insulator:PTFE

How To Order
 SMA-RR1005
 Dip Type
 Receptacle
 Right Angle

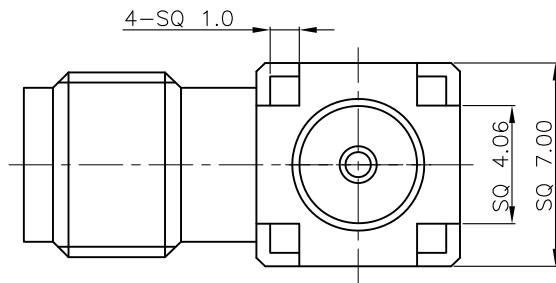

Recommended P.C.B Layout

RoHS Compliant

F				DRAWN: ZhouJie	GENERAL TOLERANCE: .X=±0.2 .XX=±0.10	 Neltron Industrial Co., Ltd.	
E							
D				CHECKED: Andrew	UNIT: MM	DESCRIPTION: SMA RECEPTACLE R/A DIP TYPE	SIZE A4
C					SCALE: 1:1		
B				APPROVAL: Bill He	SHEET: 1/1	PART NO: SMA-RR1005	
A	26-May-2023		ZhouJie		PROJECTION: 		
REV	DATE	FILE	BY				