

ST Series Soldering Iron



Features:

- Automatic sleep after 10 minutes inactivity.
- Automatic shut down after 20 minutes inactivity.
- Build in PID system.
- Shortcut temperatures adjust by button.
- LCD / LED display design.
- ESD safe
- Soldering tip designed separate from heater and using exchangeable T2080, T2150, T900 series to save use-cost.




Optional soldering iron stand S-11

Specification:

Pictures					
Item No	ST-2065D	ST-2080	ST-2080D	ST-2150	ST-2150D
Power	65W	80W	80W	150W	150W
Temperature range	250°C~480°C	5set adjustment	250°C~480°C	5set adjustment	250°C~480°C
Temperature accuracy	-10°C/+15°C	-10°C/+15°C	-10°C/+15°C	-10°C/+15°C	-10°C/+15°C
Temperature stability	±2°C	±2°C	±2°C	±2°C	±2°C
Heater	Four-core PTC heater	Four-core PTC heater	Four-core PTC heater	Four-core PTC heater	Four-core PTC heater
Heating indication	Blue LED	Blue LED	Blue LED	Blue LED	Blue LED
Temperature unit	°C/°F	°C	°C/°F	°C	°C/°F
Display method	LCD	LED	LCD	LED	LCD
Soldering tip	T900-B	T2080-B	T2080-B	T2150-B	T2150-B
Package list	Soldering Iron: 1 Unit Iron holder: 1 PCS Manual: 1 PCS				
Standard Pcking	Inner box: Slide blister 10.1x34.5(cm) N.W.: 0.24kg G.W.: 0.25kg Carton:24pcs/carton Size:39x36x37(cm) N.W.: 6kg G.W.: 6.9kg				


Note: T2080, T2150 series soldering tip details in page 26; T900 series soldering tip details in page 21.

Integrated heater (10W)



 T10-1.3D ACF030015	 T10-1.2C ACF030014	 T10-2.2D ACF030016	 T10-3.0D ACF030017	 T10-0.5I ACF030018	 T10-K ACF030019
---------------------------	---------------------------	---------------------------	---------------------------	---------------------------	------------------------

Soldering tips (T2080)

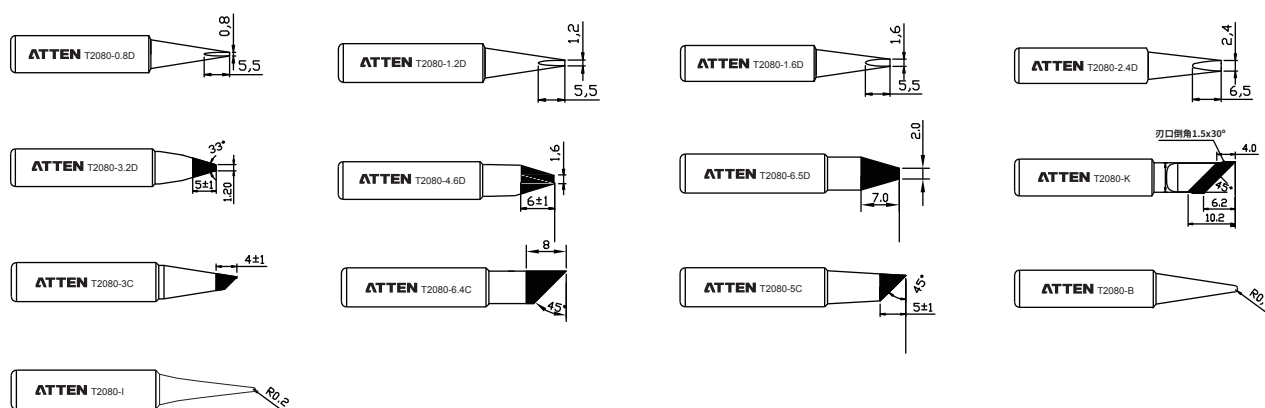

Soldering tips (T2150)

