

MODEL TL-2150

International size reference: 1/2AA, ER14252



TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)

■ Nominal capacity @ 1mA to 2V	0.95 Ah
■ Rated voltage	3.6 V
■ Maximum continuous current	50 mA
■ Maximum pulse current capability	100 mA
■ Rated 1 sec. pulse capability (to 3V)	20 mA
■ Weight	9g (0.317 oz)
■ Operating temperature range	-55°C to +85°C
■ U.L. Component Recognition MH 12193	

TADIRAN
LITHIUM
BATTERIES

[Additional Documents](#)

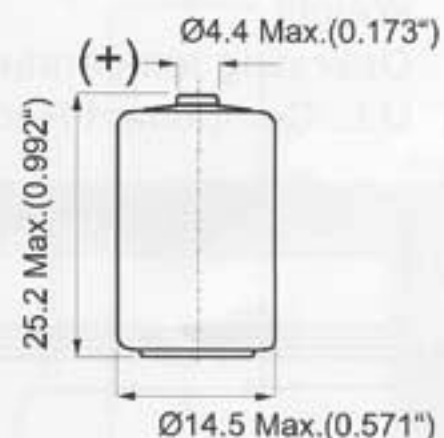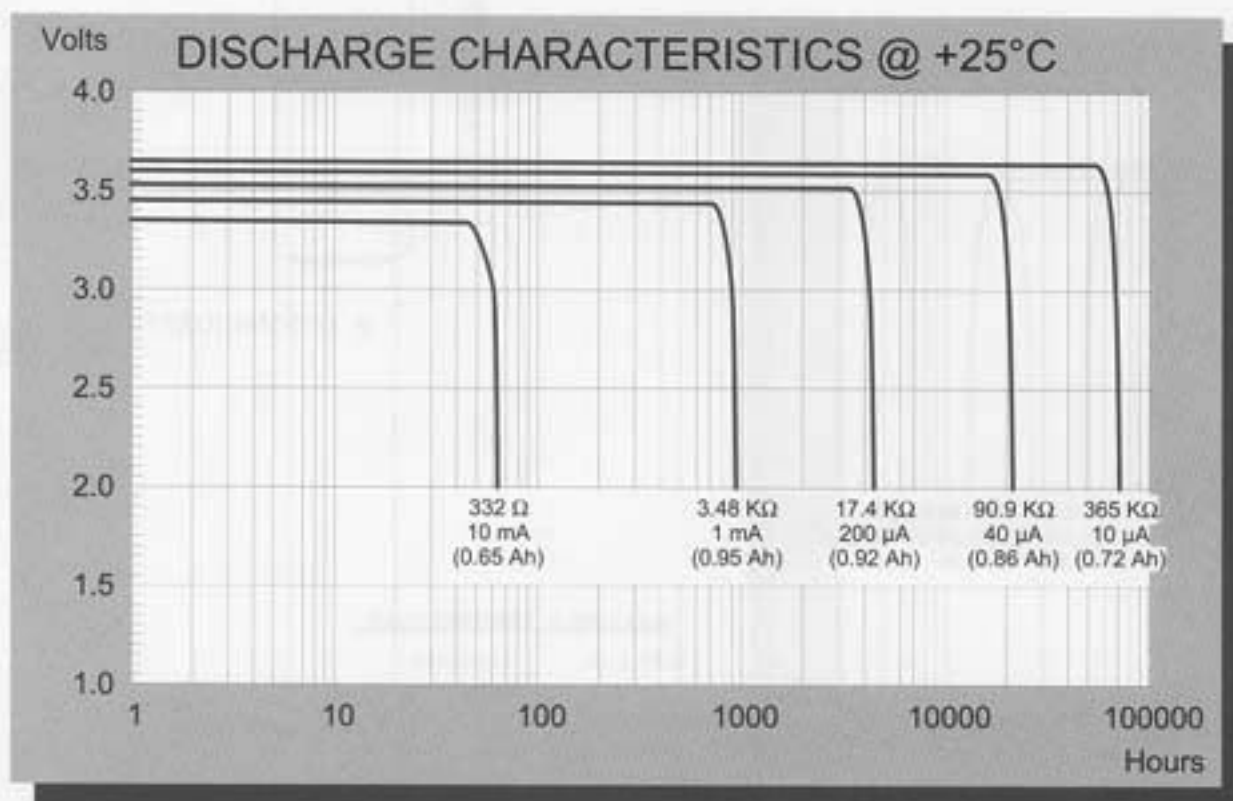

AVAILABLE TERMINATIONS:

SUFFIX- /S	STANDARD
SUFFIX- /P	AXIAL PINS
SUFFIX- /T	SOLDER TABS
SUFFIX- /PT2	RADIAL PINS
SUFFIX- /PT/TP	POLARIZED TABS

