

# TO-3020BC-MRE

## Surface Mount Device LED


Part Number	Chip		Lens Color
	Material	Source Color	
TO-3020BC-MRE	InGaN	Ultra Red	Water Clear

## Features


- IC compatible. Top view type. RoHS compliant.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow soldering process.
- Pack in 8 mm tape on 7" diameter reel.
- **Moisture sensitivity Level: level 3**

## Dimensions

Package outlines

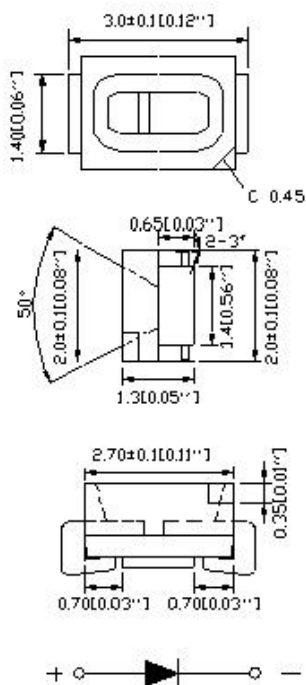

Recommend Pad Layout



### Notes:

1. All dimensions are in millimeter.
2. Tolerance is ±0.1mm unless individual mark noted.

## Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 3ms Pulse Width)	125	mA
Power Dissipation	72	mW
Continuous Forward Current	30	mA
Electrostatic Discharge (HBM)	2000	V
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +80°C	
Storage Temperature Range	-40°C to +85°C	
IR Reflow Soldering Profile For Lead Free Soldering	260°C / 10sec	

## Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	$I_v$	66	-	247	mcd	$I_F=20\text{mA}$
Viewing Angle	$2\theta_{1/2}$	-	120	-	deg	$I_F=20\text{mA}$
Forward Voltage	$V_F$	1.8	-	2.4	V	$I_F=20\text{mA}$
Dominant Wavelength	$\lambda_d$	621	-	633	nm	$I_F=20\text{mA}$
Spectral Line Half-Width	$\Delta\lambda$	-	18	-	nm	$I_F=20\text{mA}$
Reverse Current	$I_R$	-	-	10	$\mu\text{A}$	$V_R=5\text{V}$

\* Please refer to CIE 1931 chromaticity diagram.

## Bin Code List for Reference


Luminous Intensity		Unit : mcd@20mA
Bin Code	Min	Max
E2	66	86
E3	86	112
E4	112	146
F1	146	190
F2	190	247

Tolerance of Luminous Intensity on each bin is  $\pm 15\%$


Dominant Wavelength		Unit : nm@20mA
Bin Code	Min	Max
621624	621	624
624627	624	627
627630	627	630
630633	630	633

Tolerance of Dominant Wavelength on each bin is  $\pm 1\text{nm}$


## Typical Electrical / Optical Character Curves

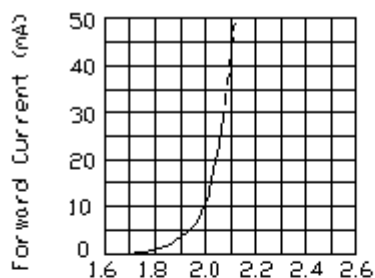


Forward Voltage (V)  
FORWARD CURRENT Vs.  
FORWARD VOLTAGE

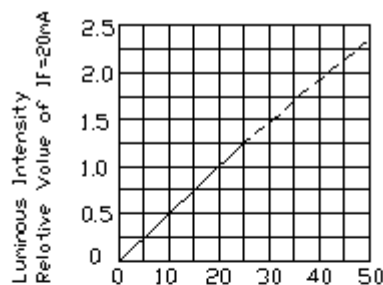


Ir-Forward Current (mA)  
LUMINOUS INTENSITY Vs.  
FORWARD CURRENT

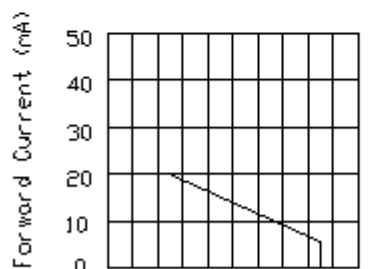


Ambient Temperature  $T_A$  (°C)  
FORWARD CURRENT  
DERATING CURVE

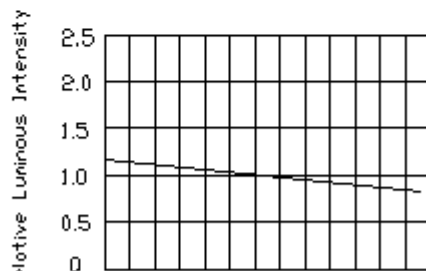

Ambient Temperature  $T_A$  (°C)  
LUMINOUS INTENSITY Vs.  
AMBIENT TEMPERATURE

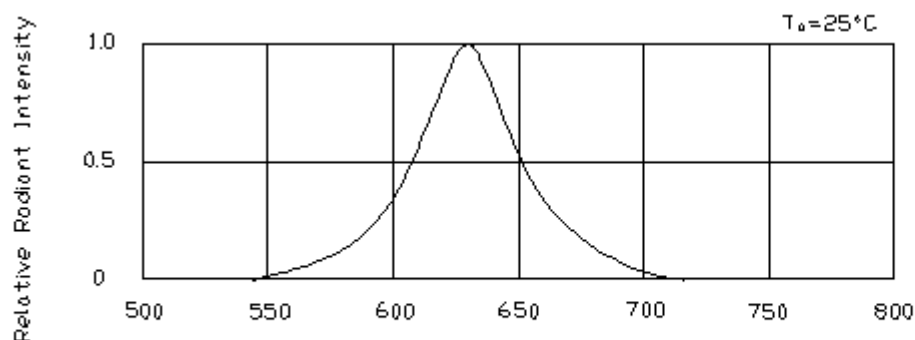




wavelength (nm)  
RELATIVE INTENSITY Vs.WAVELENGTH

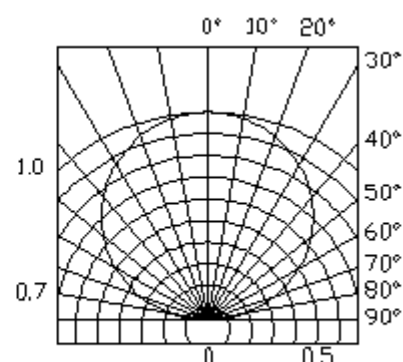


SPATIAL DISTRIBUTION

Technical drawing of a rectangular plate with dimensions and tolerances. The plate has a total width of  $8.00 \pm 0.20$  and a total height of  $3.50 \pm 0.05$ . The drawing shows six circular holes arranged in two rows of three. The top row of holes has a center-to-center spacing of  $2.00 \pm 0.05$  and a distance of  $4.00 \pm 0.05$  from the right edge to the center of the last hole. The bottom row of holes has a center-to-center spacing of  $4.00 \pm 0.10$ . The distance from the bottom edge to the center of the holes is  $1.75 \pm 0.10$ . The drawing also shows two sets of hatched rectangular areas, each with a width of  $1.00 \pm 0.10$  and a height of  $0.20$ . The distance from the left edge to the center of the first hatched area is  $1.50 \pm 0.10$ . The drawing includes dimension lines and arrows indicating the measurement directions.

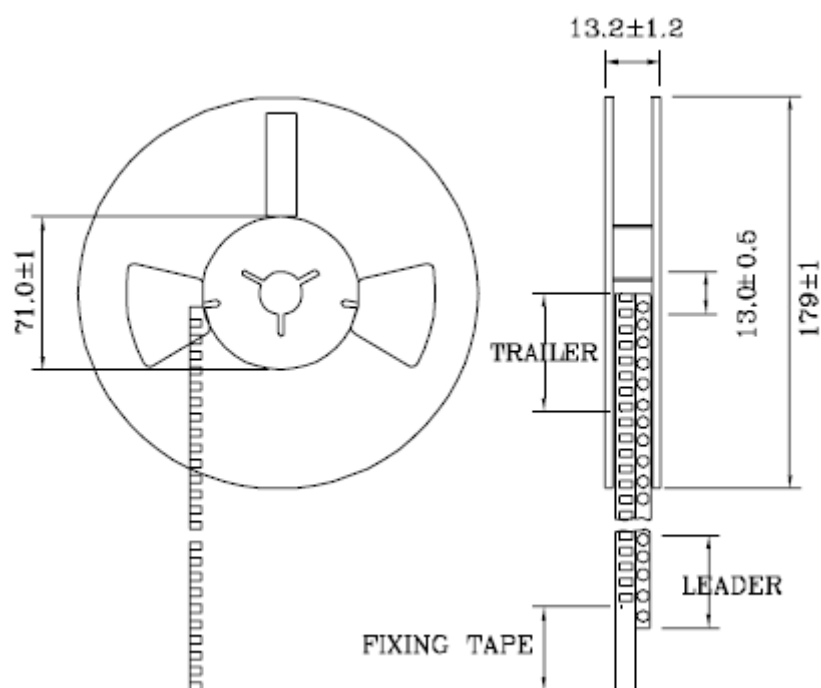

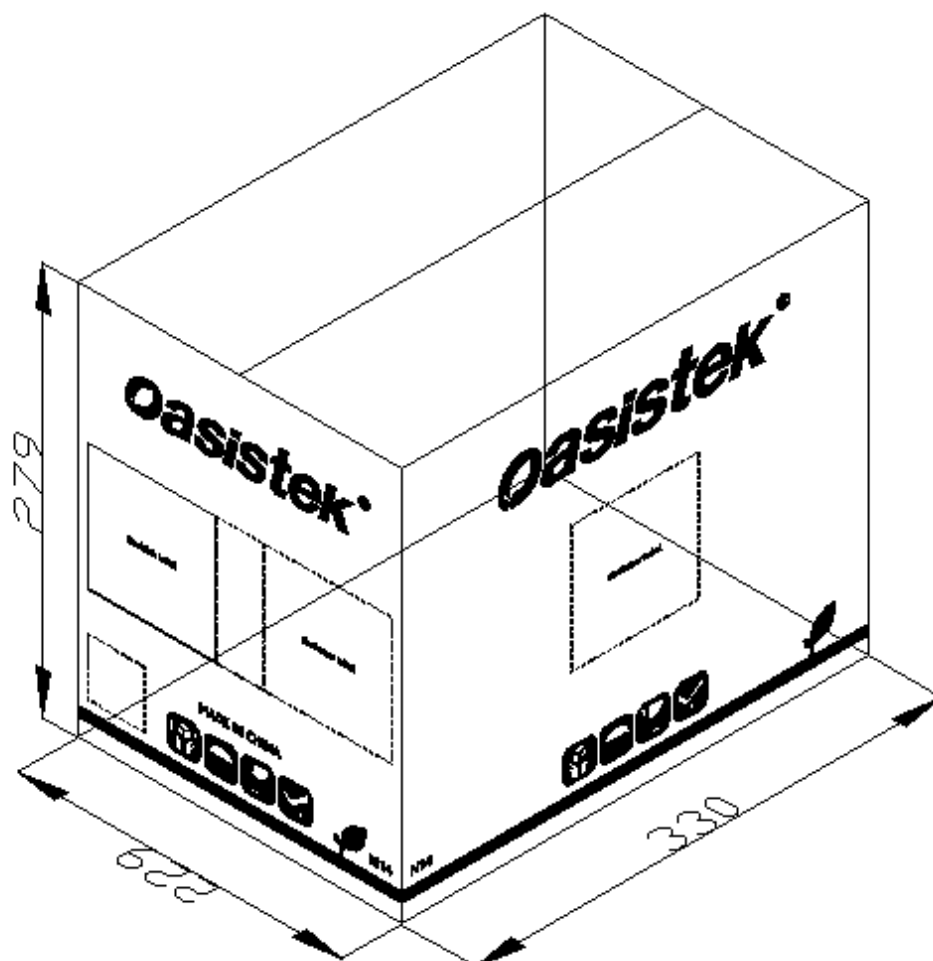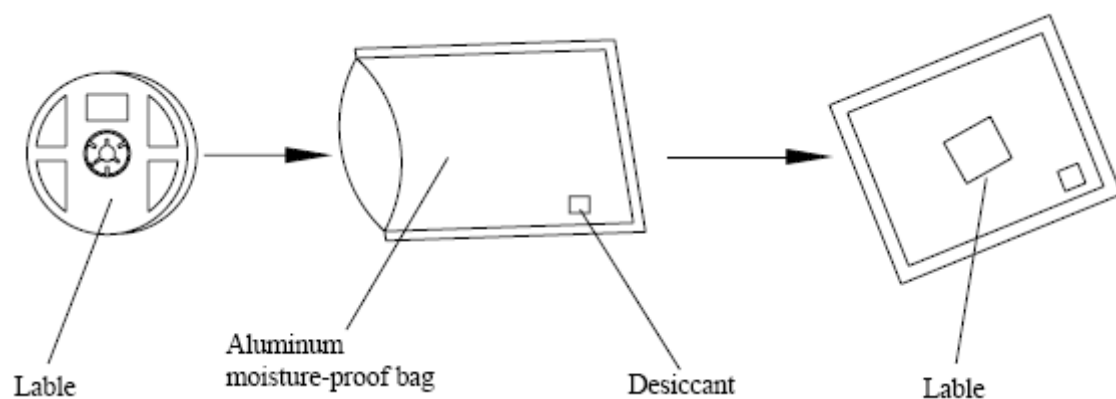

## Reflow Profile

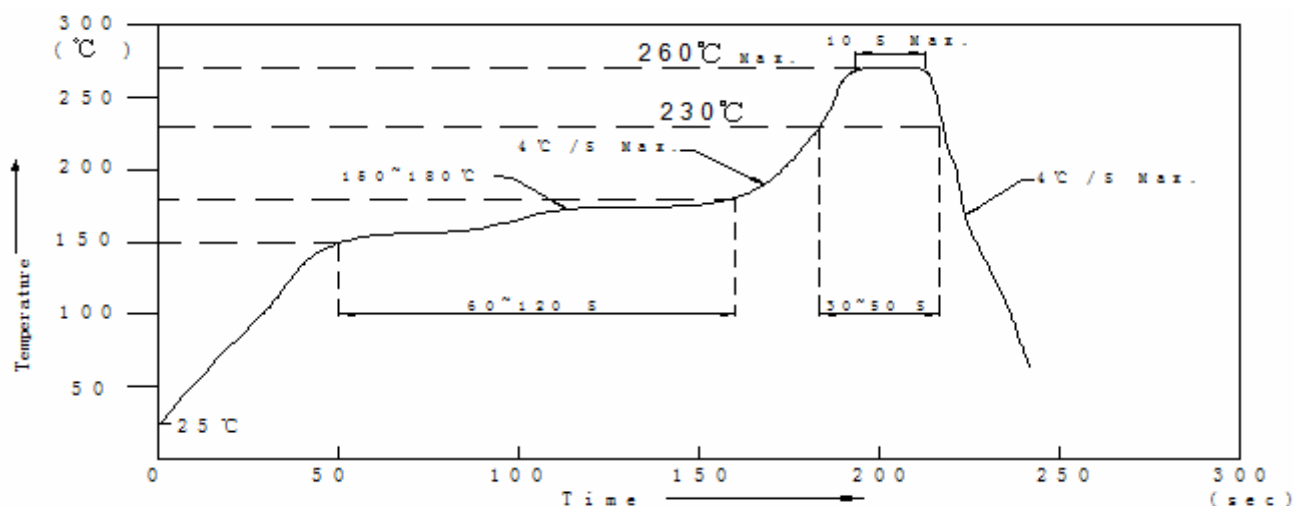

### Notes:


1. We recommend the reflow temperature 245°C (±5°C). the maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

### n Soldering iron

Basic spec is £ 5sec when 260°C. If temperature is higher, time should be shorter (+10°C ~ -1sec). Power dissipation of iron should be smaller than 20W, and temperatures should be controllable. Surface temperature of the device should be under 230°C.

### n Rework

1. Customer must finish rework within 5 sec under 260°C.
2. The head of iron can not touch copper foil.
3. Twin-head type is preferred.

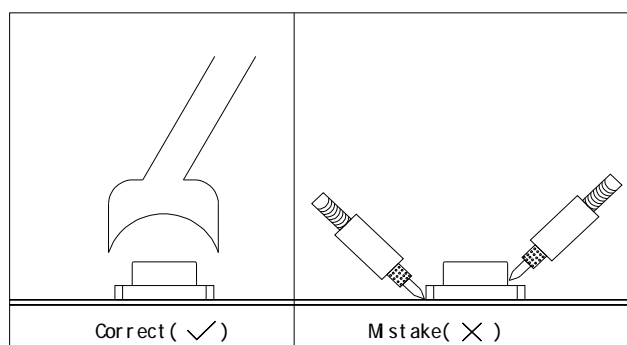

n Avoid rubbing or scraping the resin by any object, during high temperature, for example reflow solder etc.

## Reliability Tests

Test Item	Test Condition	Test Time
Thermal Shock	-40°C * 20mins ~ 85°C * 20mins	100 cycles
Temperature Humidity Storage	Ta= 85°C, RH= 90%	500hours
High Temperature Storage	Ta= 85°C	500hours
Low Temperature Storage	Ta= -40°C	500hours
DC Operating Life	Ta= 25°C, 20mA	1000hours
Resistance to Soldering Heat IR-Reflow Normal Process	Refer to recommended profile	1 time
Resistance to Soldering Heat IR-Reflow Pb Free Process	Refer to recommended profile	1 time

## Cautions

The LED's are devices which are materialized by combining blue LED's and special phosphors. Consequently the color of the LED's is changed a little by an operating current. Care should be taken after due consideration when using LED's.

### (1) Moisture Proof Package:

When moisture is absorbed into the SMT package it may vaporize and expand during soldering. There is a possibility that this can cause exfoliation of the contacts and damage to the optical characteristics of the LED's. For this reason, the moisture proof package is used to keep moisture to a minimum in the package.

### (2) Storage Conditions

#### Before opening the package:

The LED's should be kept at 30°C or less and 60%RH or less. The LED's should be used within a year. When storing the LED's, Moisture proof packaging with absorbent material (silica gel) is recommended.

#### After opening the package:

The LED's should be kept at 30°C or less and 50%RH or less. The LED's should be soldered within 168 hours (7days) after opening the package. If unused LED's remain, they should be stored in moisture proof packages, such as sealed containers with packages of moisture absorbent material (silica gel). It is also recommended to return the LED's to the original moisture proof bag and to reseal the moisture proof bag again. If the moisture absorbent material (silica gel) has faded away or the LED's have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: more than 48 hours at 65±5°C Oasistek LED electrode and lead free are comprised of a silver plated copper alloy. The silver surface may be affected by environments which contain corrosive gases and so on.



Please avoid conditions which may cause the LED to corrode, tarnish or discolor. This corrosion or discoloration might lower solderability or might affect on optical characteristics. Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation can occur.

### **(3) Heat Generation**

Thermal design of the end product is of paramount importance. Please consider the heat generation of the LED when making the system design. The coefficient of temperature increase per input electric power is affected by the thermal resistance of the circuit board and density of LED placement on the board, as well as other components. It is necessary to avoid intense heat generation and operate within the maximum ratings given in this specification. The operating current should be decided after considering the ambient maximum temperature of LED's.

### **(4) Cleaning**

It is recommended that isopropyl alcohol be used as a solvent for cleaning the LED's. when using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LED's because of worldwide regulations. Do not clean the LED's by the ultrasonic. When it is absolutely necessary, the influence of ultrasonic cleaning on the LED's depends on factors such as ultrasonic power and the assembled condition. Before cleaning, a pre-test should be done to confirm whether any damage to the LED's will occur °C.

### **(5) Static Electricity**

Static electricity or surge voltage damages the LED's. It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LED's. All devices, equipment and machinery must be properly grounded. It is recommended that measures be taken against surge voltage to the equipment that mounts the LED's. When inspecting the final products in which LED's were assembled, it is recommended to check. Whether the assembled LED's are damaged by static electricity or not, it is easy to find static-damaged LED's by a light -on test or a VF test at a lower current (below 1mA is recommended). Damaged LED's will show some unusual characteristics such as the leak current remarkably increases, the forward voltage becomes lower, or the LED's do not light at the low current. Criteria ( $V_f > 2.0V$  at  $I_f = 0.5mA$ )

### **(6) Others**

Care must be taken to ensure that the reverse voltage will not exceed the absolute maximum rating when using the LED's with matrix drive. The LED light output is strong enough to injure human eyes. Precautions must be taken to prevent looking directly at the LED's with unaided eyes for more than a few seconds. Flashing lights have been known to cause discomfort in people, you can prevent this by taking precautions during use. Also, people should be cautions when using equipment that has had LED's incorporated into it. The LED's described in this brochure are intended to be used for ordinary electronic equipment (such as office equipment , communications equipment, measurement instruments and household appliances) Consult Oasistek's sales staff in advance for information on the applications in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LED's may directly jeopardize life or health (such as for airplanes, aerospace, submersible repeaters, nuclear reactor control systems, automobile, traffic control equipment, life support systems and safety devices). User shall not reverse engineer by disassembling or analysis of the LED's without having prior written consent from Oasistek when defective LED's are found, the User shall inform Oasistek directly before disassembling or analysis. The formal specifications must be exchanged and signed by both parties before large volume purchase begins. The appearance and specifications of the product may be modified for improvement without notice.