




TAIWAN OASIS LED DATA SHEET

PART NO. : TOS-23101BMRL-N


APPEARANCE			TECHNOLOGIE	AlGaInP/GaAs
FACE	SEGMENT	PIN	SOURCE COLOR	Ultra-Red
Gray	White	ø0.60x10.28	DRIVER MODE	Com. Anode
			PACKING	TUBE"23101"

PACKAGE DIMENSIONS

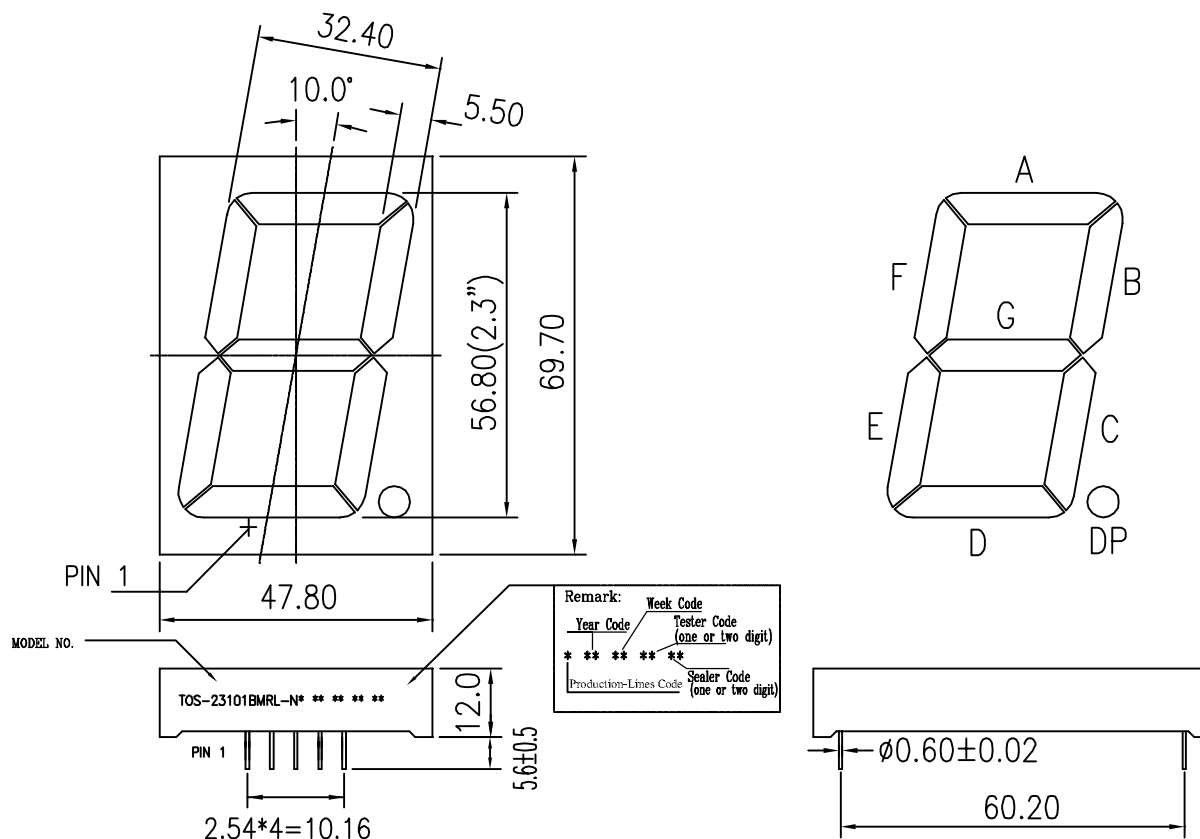

NORMAL TOLERANCE:±0.25 ANGLE:±1°

INTERNAL CIRCUIT DIAGRAM

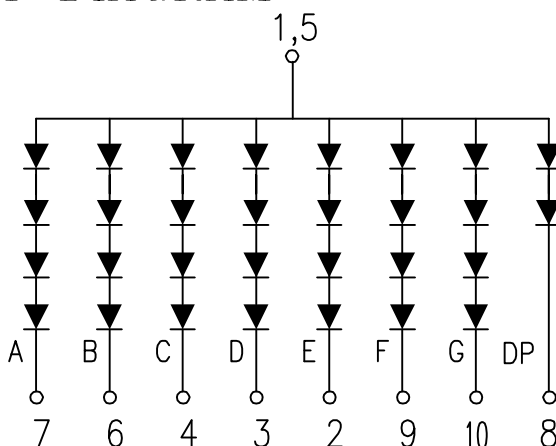

DATE	10/22/08'	SCALE	1:1	DRAWING NO.	S-23101BMRL-N-A	DRAWN	C.D.P	CHECKED	
UNIT	M/M	SHEET NO.	1/2			CUSTOMER		APPROVED	



TAIWAN OASIS LED DATA SHEET

PART NO. : TOS-23101BMRL-N

ABSOLUTE MAXIMUM RATINGS AT TA=25°C

PARAMETER	VALUE	UNITS
Power Dissipation Per Segment (Except Dp)	260	mW
Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width)	80	mA
Continuous Forward Current Per Segment	20	mA
Recommend Operating Current	12	mA
Reverse Voltage Per Segment (Except Dp)	20	V
Operating Temperature Range	-25 to +85	°C
Storage Temperature Range	-30 to +85	°C
Junction Temperature	>85	°C
Lead-Free Solder Temperature(1/16 Inch Below Seating Plane)	260°C for 3 sec.	

ELECTRICAL/OPTICAL CHARACTERISTICS AT TA=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITION
Luminous Intensity Per Segment	I _v		21937		μcd	I _F =10mA
Dominant Emission Wavelength	λ _d		640		nm	I _F =20mA
Spectral Line Half-Width	Δλ		15		nm	I _F =20mA
Forward Voltage Per Segment	V _F	7.2	8.0	9.2	V	I _F =20mA
Forward Voltage of Dp	V _F	3.6	4.0	4.6	V	I _F =20mA
Reverse Current Per Segment	I _R			100	μA	V _R =20V
Reverse Current of Dp						V _R =10V
Luminous Intensity Matching Rate	I _v -m			2.0:1		I _F =20mA

DATE	10/22/08'	SCALE	_____	DRAWING NO.	S-23101BMRL-N-A	DRAWN	C.D.P	CHECKED	
UNIT	M/M	SHEET NO.	2/2			CUSTOMER		APPROVED	