


**PRECISION MEASUREMENT
START RIGHT AT THE PROBE TIP**

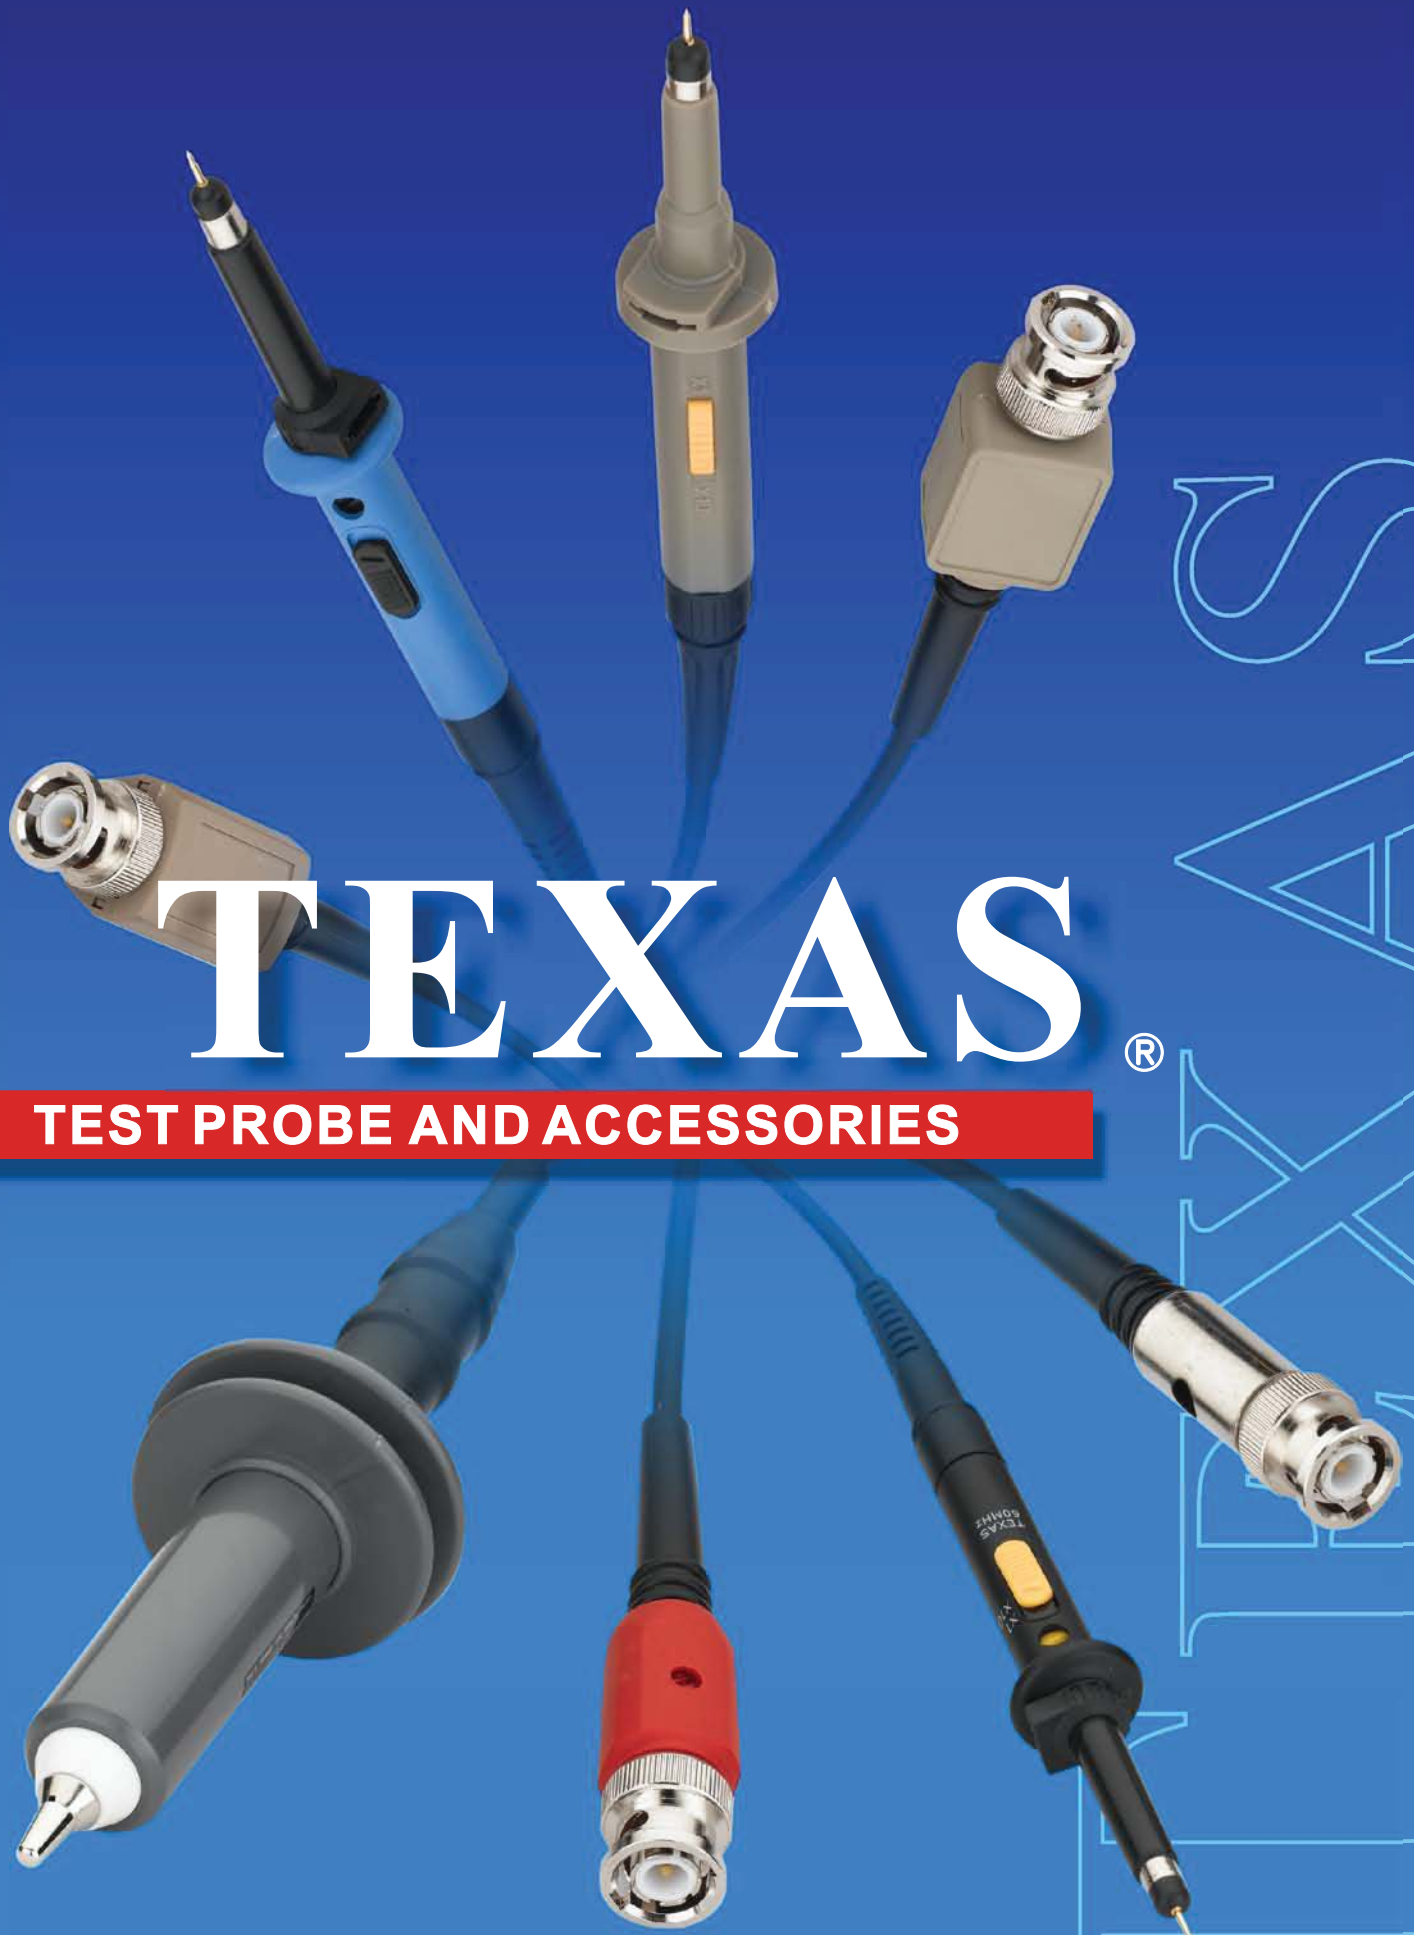

TEXAS[®]

TEST PROBE AND ACCESSORIES

2005 FULL CATALOG


Passive probe TEXAS-XXX/I Series

The H.K.TEXAS design of passive oscilloscope probes feature a one piece (monolithic) design for robust probe life. Probe bandwidth ratings are specified as system bandwidth. System bandwidth includes both probe and oscilloscope together as system. The result is a probe frequency response that essentially can be considered transparent.

Modular construction.


Full set a accessories are included with each probe.

All probes meet IEC1010-2-031,600 Vpp, CATI

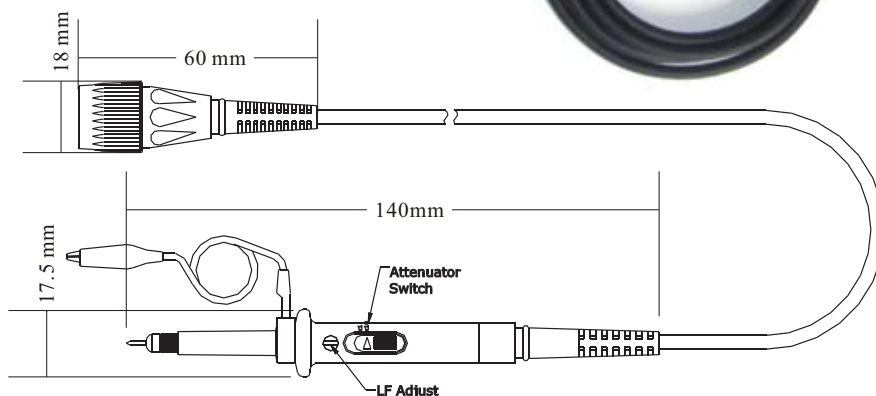

Accessory Pack includes

Ground spring(1).
Ground lead 12cm (1).
Retractable hook tip(1).
Insulating cap(1).
IC insulating cap(1).
Trimmer tool(1).
Color ring(2).
Probe tip(1).

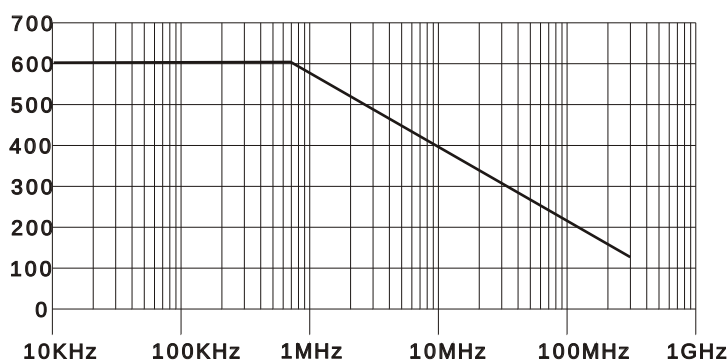

Model	Attenuation	Bandwidth (3dB)MHz	Rise-time (ns)	Compensation Range(pF)	MAX. Input Volt	Input Res. (MΩ)	Input Cap. pF	GND REF.
TEXAS20/I	X1/X10	15/20	23.3/17.5	10-60	600	1/10	60/15	X
TEXAS40/I	X1/X10	15/40	23.3/8.75	10-60	600	1/10	60/15	X
TEXAS60/I	X1/X10	15/60	23.3/5.8	10-60	600	1/10	57/15	X
TEXAS100/I	X1/X10	15/100	23.3/3.5	10-60	600	1/10	57/15	X

