



## 產品確認書

### PRODUCT SPECIFICATION

品 名

TITLE: SLIDE SWITCH 2P3T

型 號

MODEL U13SS-23L04-G6

所 屬 部 門

DEPARTMENT: CONTENT: 3 SHEETS

內 容 頁 數

本司存檔號

OUR REF. NO: YOUR REF. NO:

貴司存檔號

日 期

DATE: 26-JUL-07

#### 客戶承認印鑑 CUSTOMER APPROVAL

審 核 人

APPROVED BY:

日 期

DATE:

蓋 章 ISSUED

請 確 認 規 格 后 簽 回

PLEASE SIGN RETURN AFTER APPROVED

日 進 工 業 有 限 公 司 (1973 年 成 立)

Promotive Industrial Co., Ltd. (Established in 1973)

香港荃灣灰角街二至六號二字樓

2/F, 2-6 Fui Yiu Kok Street, Tsuen Wan, Hong Kong

Tel: (852) 2408 6681

Fax: (852) 2409 5086

<http://www.pic.com.hk>

<http://www.hkpic.com>




ISO 14001:1996  
Certification NO.: E10018








PROMOTIVE INDUSTRIAL CO., LTD.			
D.	DURABILITY		PAGE : 2/2
	PROPERTY	TEST CONDITION	PERFORMANCE
D.1	SWITCHING LIFE(WITH LOAD)	OPERATING FOR 10,000 CYCLES AT A RATE OF LESS THAN 10 CYCLES/MIN.	CONTACT RESISTANCE : NOT MORE TNAN 500 mOhm. INSULATION RESISTANCE : MORE THAN 100 Mohm. WITHSTAND VOLTAGE : AC 1000V FOR 1 MINUTE. OPERATION FORCE : + 10%/-30% OF SPEC.. THERE SHALL BE NO DEFECTS IN APPEARANCE AND MECHANICAL FUNCTIONS.
D.2	SWITCHING LIFE (WITHOUT LOAD)	OPeATING FOR 100,000 CYCLES AT A RATE OF 15-18 CYCLES/MINUTE.	CONTACT RESISTANCE : NOT MORE TNAN 500 mOhm. INSULATION RESISTANCE : MORE THAN 100 Mohm. WITHSTAND VOLTAGE : AC 1000V FOR 1 MINUTE. OPERATION FORCE : + 10%/-30% OF SPEC.. THERE SHALL BE NO DEFECTS IN APPEARANCE AND MECHANICAL FUNCTIONS.
E.	WEATHER PROOF		
E.1	COLD PROOF	SWITCH FOR TEST BEING KEPT IN THE CONDITIONS AT -20 ± 2 ° C IN TEMPERATURE FOR 96 HOURS, AND IN A NORMAL AMBIENT CONDITION FOR ONE HOUR , THEN TO BE MEASURED WITHIN ONE HOUR. DROPS OF WATER BEING TAKEN AWAY.	CONTACT RESISTANCE : NOT MORE TNAN 500 mOhm. INSULATION RESISTANCE : MORE THAN 100 Mohm. WITHSTAND VOLTAGE : AC 1000V FOR 1 MINUTE. OPERATION FORCE : + 10%/-30% OF SPEC.. THERE SHALL BE NO DEFECTS IN APPEARANCE AND MECHANICAL FUNCTIONS.
E.2	HEAT RESISTANCE	SWITCH FOR TEST BEING KEPT IN THE CONDITIONS 85 ± 2 ° C IN TEMPERATURE FOR 96 HOURS, AND IN A NORMAL AMBIENT CONDITION FOR ONE HOUR,THEN TO BE MEASURED WITHIN ONE HOUR.THEN TO BE MEASURED WITTHIN 7	
E.3	RESISTANCE TO HUMIDITY	SWITCH FOR TEST BEING KEPT IN THE CONDITIONS AT 40 ± 2 ° C IN TEMPERATURE AND 90-95% RH FOR 96 HOURS, AND IN A NORMAL AMBIENT CONDITION FOR 1 HOUR ,THEN TO BE MEASURED WITHIN ONE HOUR. DROPS OF WATER BEING TAKEN AWAY.	CONTACT RESISTANCE : NOT MORE TNAN 500 mOhm. INSULATION RESISTANCE : MORE THAN 100 Mohm. WITHSTAND VOLTAGE : AC 1000V FOR 1 MINUTE. OPERATION FORCE : + 10%/-30% OF SPEC.. THERE SHALL BE NO DEFECTS IN APPEARANCE AND MECHANICAL FUNCTIONS.
F.	TEST AND MEASURING CONDITION		
TEMPERATURE : 5-35 ° C HUMIDITY : 45-85% RH PRESSURE : 860-1060 mbar  ASSURING THE DOUBTFUL POINTS IN MEASUREMENT, TEST UNDER CONDITIONS OF TEMPERATURE : 20 ± 5 ° C HUMIDITY : 75 ± 10% RH PRESSURE : 860-1060 mbar			

NOTE : SPECIFICATION SUBJECT TO CHANGE FOR IMPROVEMENT.



NON-SHORTING  
SCHEMATIC

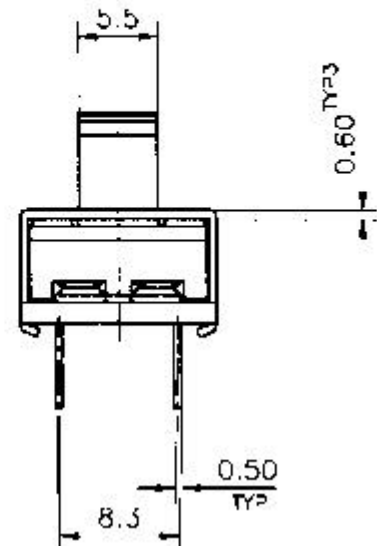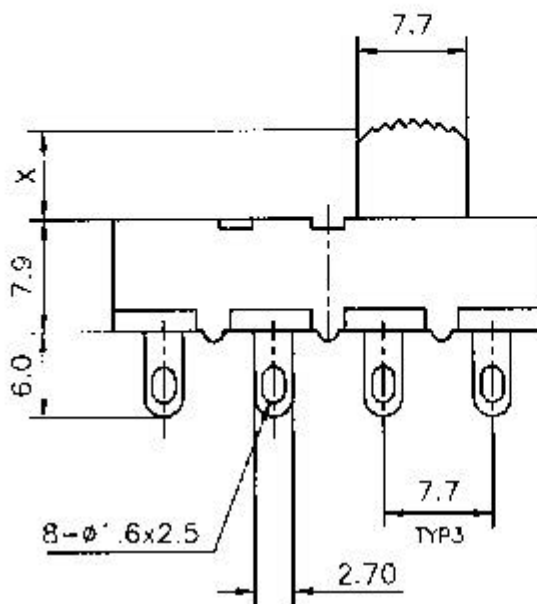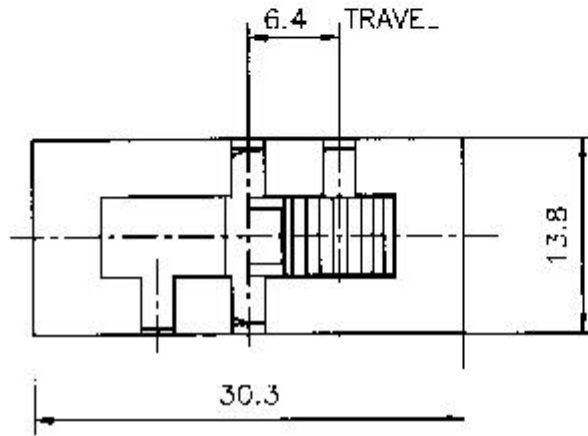

X=



WITH U'3SS UL & C-UL LOGO

18 OCT 2002

ISSUED	SPECIFICATION	TITLE: SLIDE SWITCH 2P3T			
	RATING: 13A 125VAC 6.5A 250VAC	MODEL NO: U13SS-23L04-G			
	CONTACT RESISTANCE: MAX. 30mΩ INITIAL	UNIT: m m	DWN	X.W.HU	11/10/02
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1	CHK'D	<i>[Signature]</i>	12/10-02
	WITHSTAND VOLTAGE: AC 100CV FOR 1 MIN	TOLERANCE: ±0.20	APPD.	<i>[Signature]</i>	14/10-02
	OPERATION FORCE: 400±150g	DRWG NO: 940387-02			
SWITCHING LIFE 10000 Cycles (6-0s/m loading)		BY: PROMOTIVE INDUSTRIAL CO., LTD. HONG KONG			
DATE:					