


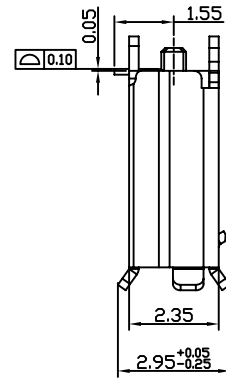
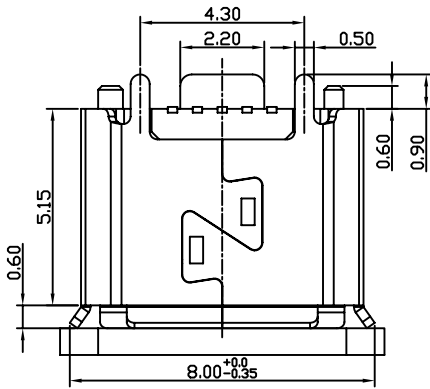
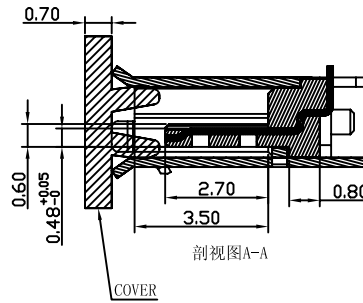



REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2017/09/23	/	NEW	Jason

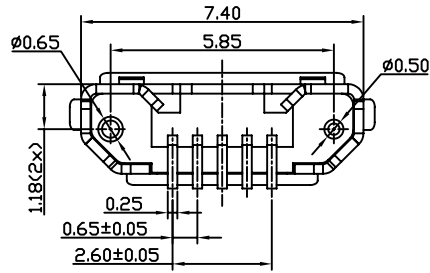


NOTE:
 1. Materials:
 1.1 Housing: Thermoplastic, UL94V-0
 1.2 Contact: Copper Alloy, Half metallic tin or all Gold plated
 1.3 Shell: SUS, Surface matte Tin plating
 2. Main features:
 2.1 Rating current: 1A,
 2.2 Contact resistance: 50mΩ MAX.
 2.3 Insulation resistance: 1000MΩ MIN 250V DC.
 2.4 Withstand voltage: 250V AC.
 2.5 Mating force: 3.75kgf MAX,
 Un-Mating force: 1.00kgf MIN.
 2.6 Life cycle: 5000 cycles.
 2.7 Operating Temperature: -30℃~+80℃.

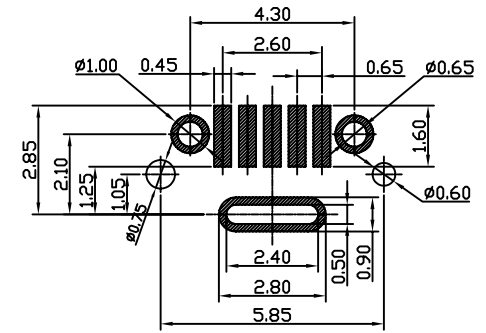

RECOMMEND PCB LAYOUT
 TOLERANCE: ±0.05

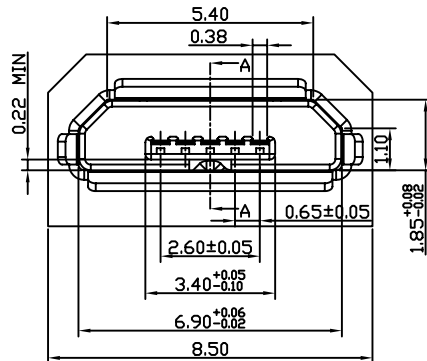

GENERAL TOLERANCE				UNITS mm		NAME: USB		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓			MAT'L		PART NO: USB205FB-D1005200		TITLE: MICRO USB 5P FEMALE SMT B TYPE 立式 带定位柱			
TOL. ON.	1	2	3			APPD: Jason		DWG NO. ATOM-A03913			
X.XXX	±0.05	±0.05	±0.15	FINISH		CHKD: Vicky		 SCALE SHEET REV			
X.XX	±0.15	±0.13	±0.25			DR: hujing					
X.X	±0.20	±0.25	±0.50	Q'TY				1:11/1A			
X.		±0.38	±1.00								
ANGLE	±1°										