


DISCHARGE TEST (70Hz.,17000. V)
 HI-PDT TEST (50Hz.,3000 V.,1 Sec.)

PRODUCT CODE ('A')	LENGTH ('B')
F31QSACPE056	1,800 mm.
F31QSACPE057	3,000 mm.
F31QSACPE058	5,000 mm.


CUSTOMER	J.S.L.
PRODUCT NO.	'A'
REVISION	1.0

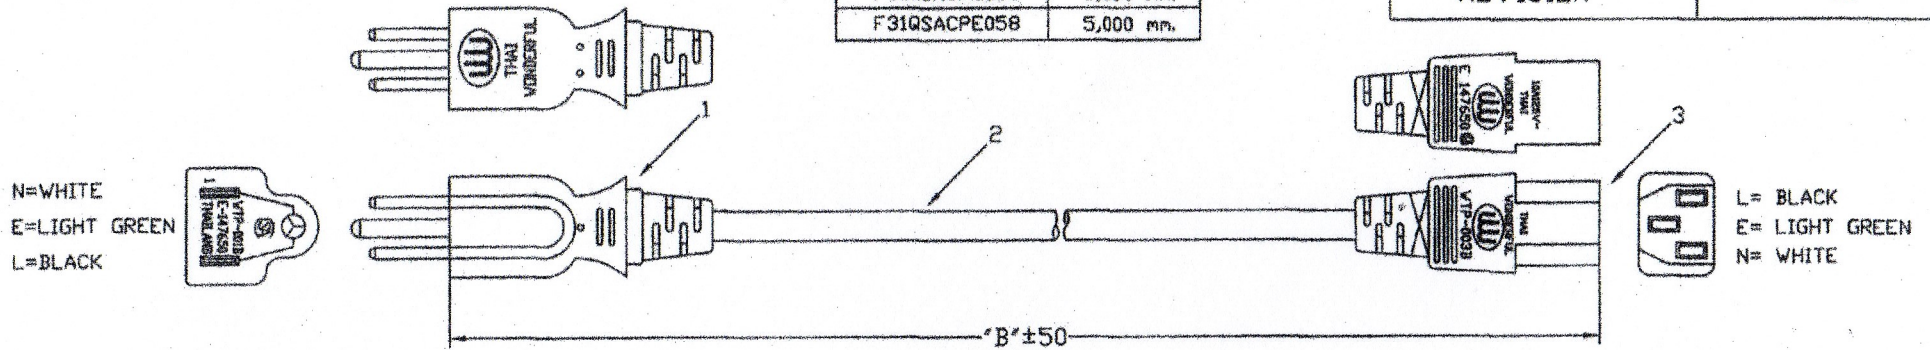

CRIMPING HEIGHT AND CRIMPING TENSILE FORCE STANDARD

MATERIAL	CRIMPING HEIGHT (V.S)	TOLERANCE (V.S)	TENSILE
GEM 98661	2.15 mm.	±0.05 mm.	9.07 kg.
GEM 98475	2.25 mm.	±0.05 mm.	9.07 kg.
GEM 98745	1.70 mm.	±0.05 mm.	9.07 kg.

SPEC ONLY

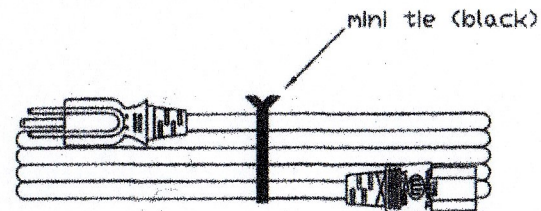

					△		
					REVISION	DATE	DESCRIPTION
					REFERENCE STANDARD	CUSTOMER'S SPECIFICATION	
3.2	MOLD POWER PLUG : WTP003B (TYPE UL) PVC-65%	BLACK	0.0485	KG.	SCALE FREE UNIT : mm.	APPROVE	
3.1	HOOD : WTP-003 (ACE)	BLACK	1	PCS		QA. DEPT.	
3.	TERMINAL : GEM 98745BS-0		3	PCS		CONTROL W.H. DEPT.	
2	WIRE : SVT 18AWGx3C+P 60°C (V44183PA11)	BLACK	'B'	M		CHECK	
1.3	HOOD : WTP-001 (JUJIANG)	BLACK	1	SET		DESIGN	
1.2	TERMINAL : GEM 98475BS-1		1	PCS	CUSTOMER PART NO.		
1.1	TERMINAL : GEM 98661BS-1		2	PCS	DWG. NO.	DWHP10060313-00	
1	MOLD POWER PLUG : WTP001B (TYPE UL) PVC-65%	BLACK	0.0485	KG.	STYLE	POWER CORD SET	
ITEM	DESCRIPTION	COLOR	Q'TY	UNIT	THAI WONDERFUL WIRE CABLE CO.,LTD.		