



直插式连接技术

Push-in connection technology

直通式、多导线、多层和接地端子



Feed-through, multi-conductor, multi-level, and ground terminal blocks

注：附件以及操作说明详见09页
Notes: For additional accessories and operating instruction, see page 09.

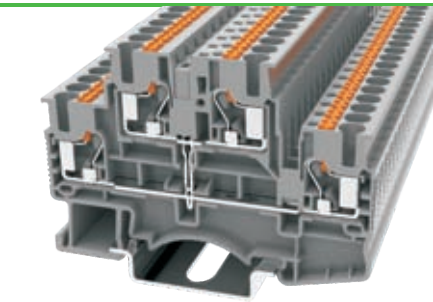

DSKK 2.5

UL US CE ENE RoHS REACH

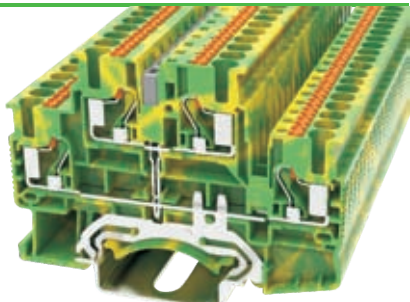

DSKK 2.5-PE

UL US CE ENE RoHS REACH

尺寸 Dimension	
厚度/长度/高度(NS35/7.5&NS35/15) Width/Length/Height(NS35/7.5&NS35/15)	mm
电气参数 Electrical Parameter	
额定电压 Rated voltage	V
额定电流 Rated current	A
额定线径 Wire range	mm²/AWG
额定冲击电压/污染等级 Rated surge voltage/Degree of pollution	KV/-
过压类别/绝缘材料组别 Overvoltage category/Insulation material group	-/-
接线容量 Connection capacity	
1根线 1 conductor	mm²
两根带TWIN冷压头的柔性导线 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve	mm²
一般信息 General information	
绝缘材质/阻燃等级 (符合UL94) Insulation material/Flammability rating(according to UL 94)	
工作温度 Operation temperature	℃ (°F)
剥线长度 Stripping length	mm
颜色 Color	
一字螺丝刀规格 (刀厚x刀宽) Slotted screwdriver size (Blade thickness x Width)	mm
附件 Accessories	
插拔式桥接件 (2-10P) Plug-in bridge (2-10P)	
端板 End cover	
标记号 (顶部) Marker (Top)	
标记号 (侧边) Marker (Side)	
DIN轨道 DIN rail	
终端固定件 End stopper	

5.2/68.2/48.75(56.25)			
IEC IEC60947-7-1		UL UL 1059	
500		300	
22		20	
0.2-4		26-12	
6/3			
III / I			
刚性 Solid	柔性 Stranded	冷压头 (不带/带塑料套管) Femule (with and without plastic sleeve)	
0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
—	—	—	0.5
PA/V0			
-40(-40)~105(221)			
11-12			
灰色 (可根据客户需求定制) Gray (customization demand is available)			
0.6x3.5			
DFB2.5			
D-DSKK2.5			
/			
ZK5			
NS35/7.5 & NS35/15 (钢和铝合金材质可选) NS35/7.5 & NS35/15 (Steel and Aluminium alloy are optional)			
E-WS&E-PC&E-MK			

5.2/68.2/48.75(56.25)			
IEC IEC60947-7-2		UL UL1059	
/		/	
/		/	
0.2-4		26-12	
6/3			
III / I			
刚性 Solid	柔性 Stranded	冷压头 (不带/带塑料套管) Female (with and without plastic sleeve)	
0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
—	—	—	0.5
PA/V0			
-40(-40)~105(221)			
11-12			
黄绿混色 Green-yellow			
0.6x3.5			
DFB2.5			
D-DSKK2.5			
/			
ZK5			
NS35/7.5 & NS35/15 (钢和铝合金材质可选) NS35/7.5 & NS35/15 (Steel and Aluminium alloy are optional)			
E-WS&E-PC&E-MK			



直插式连接技术

Push-in connection technology

直通式、多导线、多层和接地端子



Feed-through, multi-conductor, multi-level, and ground terminal blocks

注：附件以及操作说明详见09页
Notes: For additional accessories and operating instruction, see page 09.

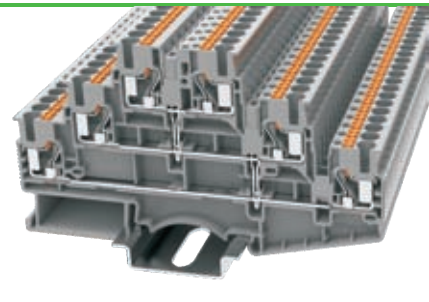

DS2.5-3L

UL US CE ENE RoHS REACH

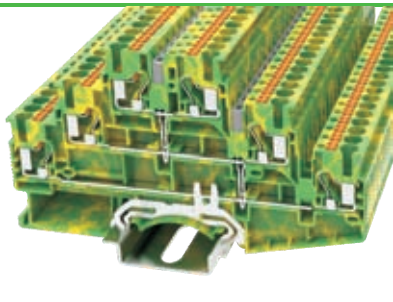

DS2.5-3L-PE

UL US CE ENE RoHS REACH

尺寸 Dimension	
厚度/长度/高度(NS35/7.5&NS35/15) Width/Length/Height(NS35/7.5&NS35/15)	mm
电气参数 Electrical Parameter	
额定电压 Rated voltage	V
额定电流 Rated current	A
额定线径 Wire range	mm²/AWG
额定冲击电压/污染等级 Rated surge voltage/Degree of pollution	KV/-
过压类别/绝缘材料组别 Overvoltage category/Insulation material group	-/-
接线容量 Connection capacity	
1根线 1 conductor	mm²
两根带TWIN冷压头的柔性导线 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve	mm²
一般信息 General information	
绝缘材质/阻燃等级 (符合UL94) Insulation material/Flammability rating(according to UL 94)	
工作温度 Operation temperature	℃ (°F)
剥线长度 Stripping length	mm
颜色 Color	
一字螺丝刀规格 (刀厚x刀宽) Slotted screwdriver size (Blade thickness x Width)	mm
附件 Accessories	
插拔式桥接件 (2-10P) Plug-in bridge (2-10P)	
端板 End cover	
标记号 (顶部) Marker (Top)	
标记号 (侧边) Marker (Side)	
DIN轨道 DIN rail	
终端固定件 End stopper	

5.2/102.00/53.25(59.25)			
IEC IEC60947-7-1		UL UL1059	
500		300	
20		20	
0.2-4		26-12	
6/3			
III / I			
刚性 Solid	柔性 Stranded	冷压头 (不带/带塑料套管) Female (with and without plastic sleeve)	
0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
—	—	—	0.5
PA/V0			
-40(-40)~105(221)			
10-12			
灰色 (可根据客户需求定制) Gray (customization demand is available)			
0.6x3.5			
DFB2.5			
D-DS2.5-3L			
/			
ZK5			
NS35/7.5 & NS35/15 (钢和铝合金材质可选) NS35/7.5 & NS35/15 (Steel and Aluminium alloy are optional)			
E-WS&E-PC&E-MK			

5.2/102.00/53.25(59.25)			
IEC IEC60947-7-2		UL UL1059	
/		/	
/		/	
0.2-4		26-12	
6/3			
III / I			
刚性 Solid	柔性 Stranded	冷压头 (不带/带塑料套管) Female (with and without plastic sleeve)	
0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
—	—	—	0.5
PA/V0			
-40(-40)~105(221)			
10-12			
黄绿混色 Green-yellow			
0.6x3.5			
DFB2.5			
D-DS2.5-3L			
/			
ZK5			
NS35/7.5 & NS35/15 (钢和铝合金材质可选) NS35/7.5 & NS35/15 (Steel and Aluminium alloy are optional)			
E-WS&E-PC&E-MK			