



未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.05/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	±1'
±0.08	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	

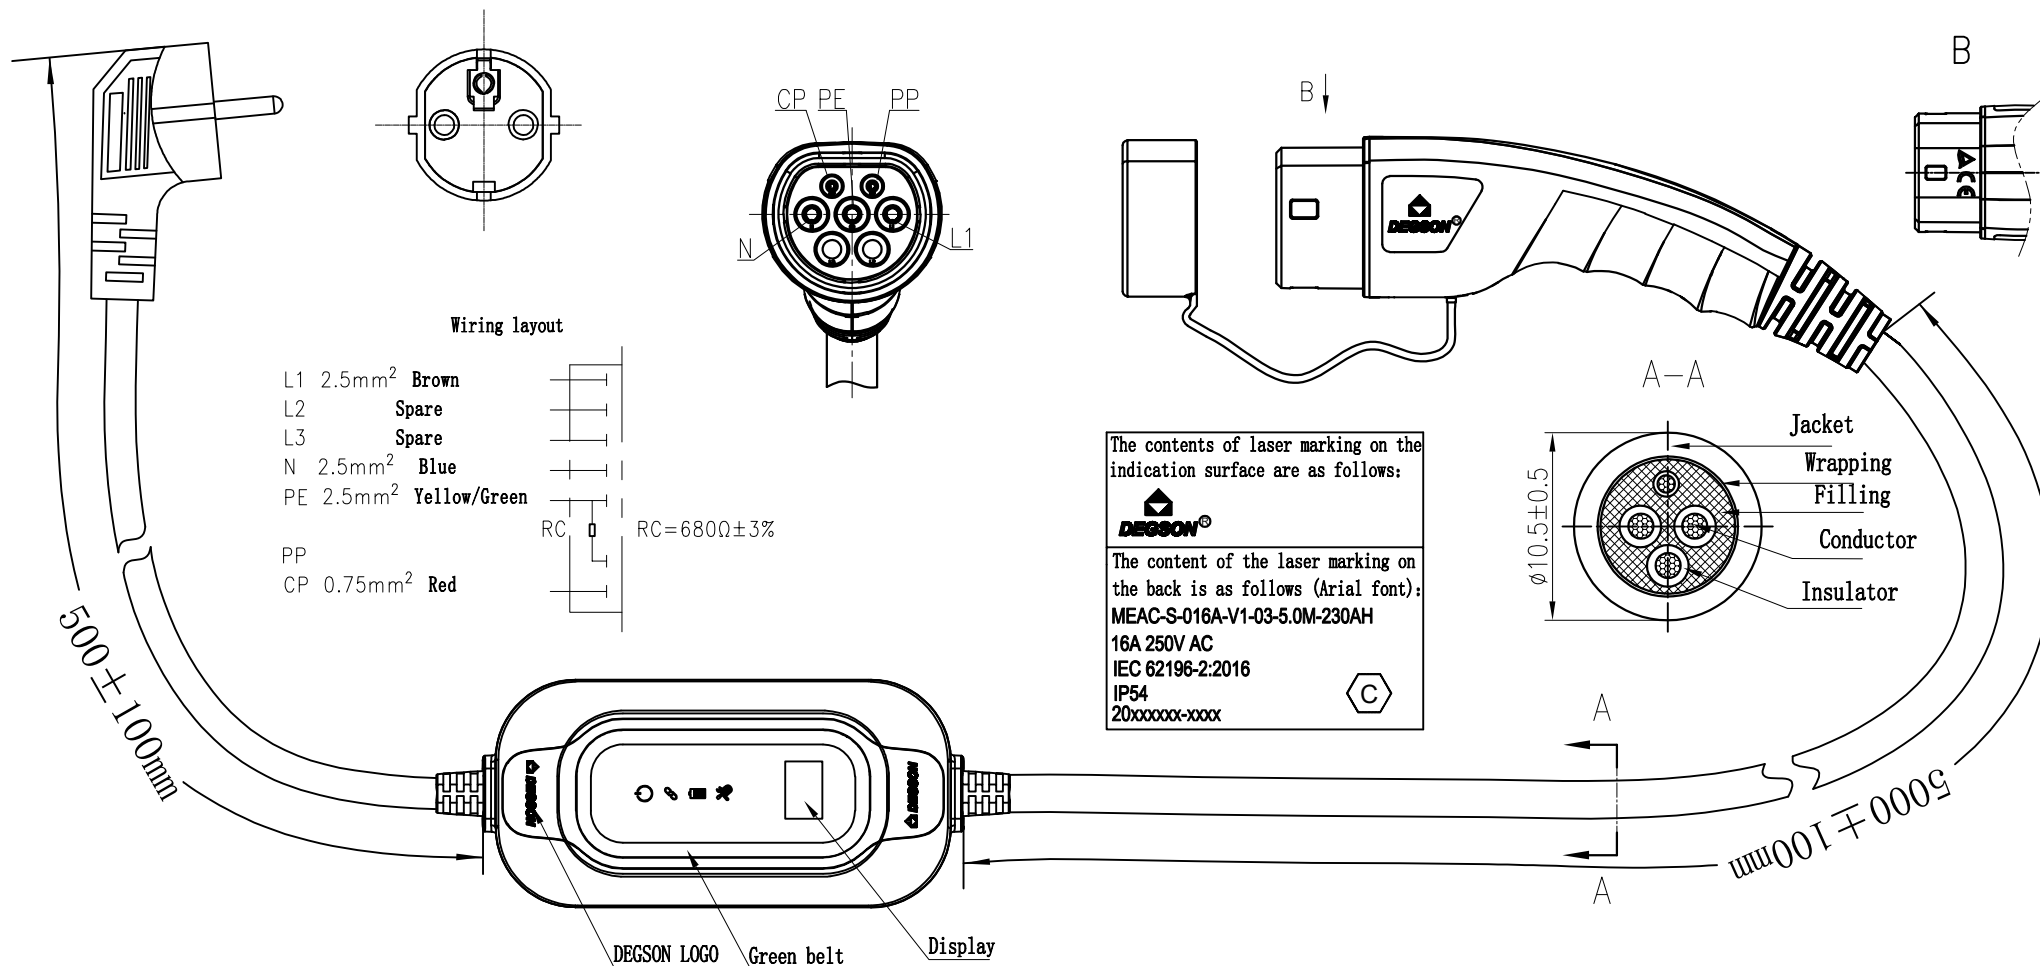

Rated Voltage/Current	240V AC/16A
Insulate Resistance	>5MΩ,500V DC 1min
Withstanding Voltage	L、N and PE ,2500V AC 1min L and N ,2500V AC 1min
Ingress Protection	IP65(IC-CPD)
Insertion/Pullout Times	10,000 Times
Insertion/Pullout Force	<75N
Operating temperature(°C)	-30~+50
RCD Protection	Type B
Packaging specification	SOP-Y-3166
Cable specification	3*2.5mm ² +1*0.75mm ² Black
Reference standard	IEC 62196-1/2 IEC 61851
Key controlled symbol	*

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

MATERIAL: /		SURFACE: /	
MAT.NO.: 22020000392		DEGSON[®] 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD:			
CHKD:			
DRFT: Li P 2023.02.10		Description: MEAC-S-016A-VB-03-5.5M-00A(H)	
DRAWING NO.:		REV	00
	SIZE: A4	 mm (inch)	TYPE: COSTOMER DRAWING
SCALE: 1:3		SHEET	1/1