



OJI PAPER (THAILAND) LTD.

SPECIFICATION

FT 210+

Description: Direct thermal non-top coated, Contains Bisphenol A (BPA)

Application: Well suited for FAX/POS, Receipt

Physical Properties

		Unit	Specification	Test method
Substance		g/m ²	58.0 ± 5.0	ISO 536
Thickness		μm	65 ± 5	ISO 534
Smoothness		Sec	Min 100	Oken method
Brightness		%	Min 75	ISO 2470 (C/2°)
Tensile Strength	MD/CD	kN/m	Min 2.0 / Min 1.0	ISO 1924-2
Tearing Strength	MD/CD	mN	Min 200 / Min 200	ISO 1974
Stiffness	MD/CD	Cm ³ /100	>15 / >7	JIS P8143

Image Density

10.32mJ/ mm²

Min 0.90

Atlantek 400 / Speed 4.0 inch/sec.

16.00mJ/ mm²

Min 1.10

Durability

Heat Resistance
Moisture Resistance
Light Resistance

Background / Image part

Max 0.20 / Min 0.80

Max 0.20 / Min 0.80



Max 0.20 / Min 0.90

Test method

60°C dry 24Hrs.

40°C 90%RH 24Hrs.

5000Lux 100Hrs.

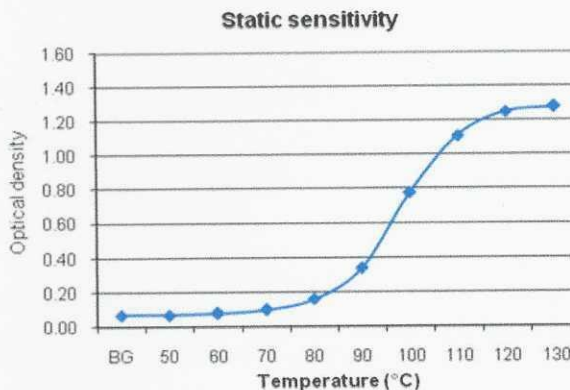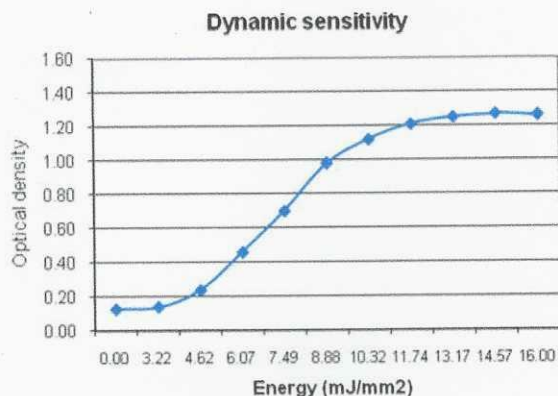

Storage Suggestion

Our thermal paper should be stored at a constant temperature of 23 ± 5 °C and a relative humidity of 50 ± 10%. Exposure to strong sunlight or strong artificial light or the influence of aggressive chemicals should be avoided.

Data represents product averages and does not constitute a warranty. Vender shall not be responsible for liability resulting from any deviation from this information. All products should be pretested to determine suitability for any specific purpose.

Valid from January 2025

OJI PAPER (THAILAND) LTD

Head office :130-132 Sindhorn Building, Tower 3, 12th Floor, Wireless Road, Lumpini, Pathumwan, Bangkok 10330 Thailand

Tel. (66-2) 2632600 Fax. (66-2) 2632628-29

www.ojipaper.co.th