


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	SEP.19.03

■ SPECIFICATIONS




- Voltage Rating : 100V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact resistance : 20m Ω max

■ WAFER

- Part No. : 1125**RT
- Poles : 2-16
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-0
- Q' ty : 1,000 pcs/Bag

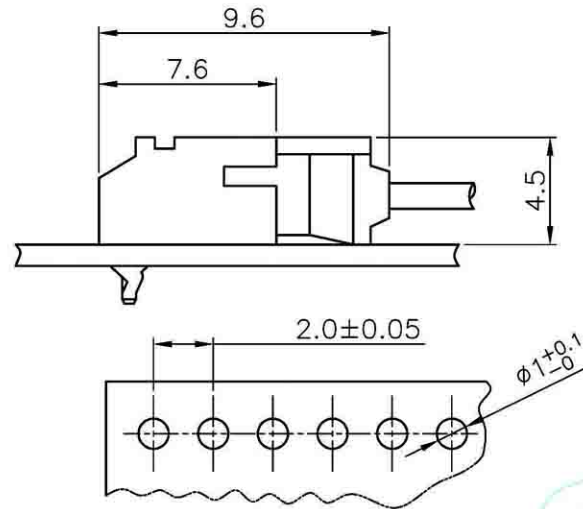

P.C.B. Hole Dimensions

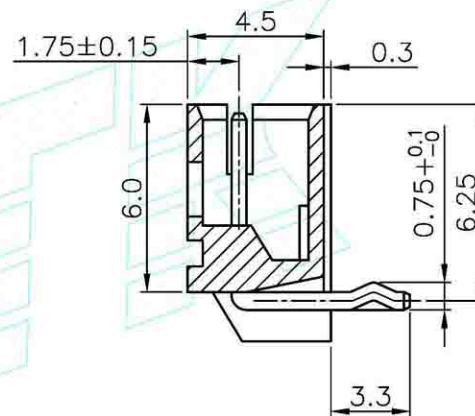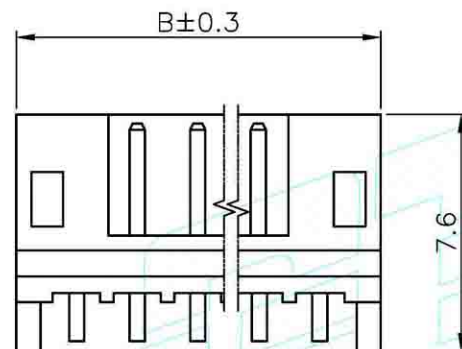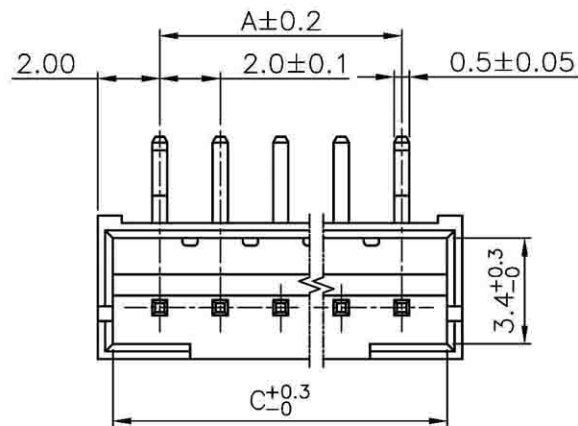

Poles	Part No.	Dimension(mm)		
		A	B	C
2	112502RT	2.00	6.00	5.00
3	112503RT	4.00	8.00	7.00
4	112504RT	6.00	10.00	9.00
5	112505RT	8.00	12.00	11.00
6	112506RT	10.00	14.00	13.00
7	112507RT	12.00	16.00	15.00
8	112508RT	14.00	18.00	17.00
9	112509RT	16.00	20.00	19.00
10	112510RT	18.00	22.00	21.00
11	112511RT	20.00	24.00	23.00
12	112512RT	22.00	26.00	25.00
13	112513RT	24.00	28.00	27.00
14	112514RT	26.00	30.00	29.00
15	112515RT	28.00	32.00	31.00
16	112516RT	30.00	34.00	33.00

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ±	.X° ±
.XX ±	.XX° ±
.XXX±	.XXX° ±
APPD	
CHKD	
DRAW	Z

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
2.00mm PITCH WAFER

CONNECTOR

CPART NO.

PART NO.
1125**RT

CAD NO.
F:\DRW\HW\HW-0026

SHEET
1 OF 1

圖面編號:GTKSD1151-A(1)