
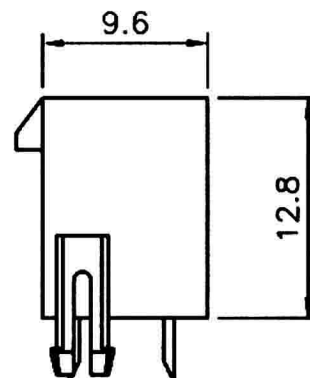
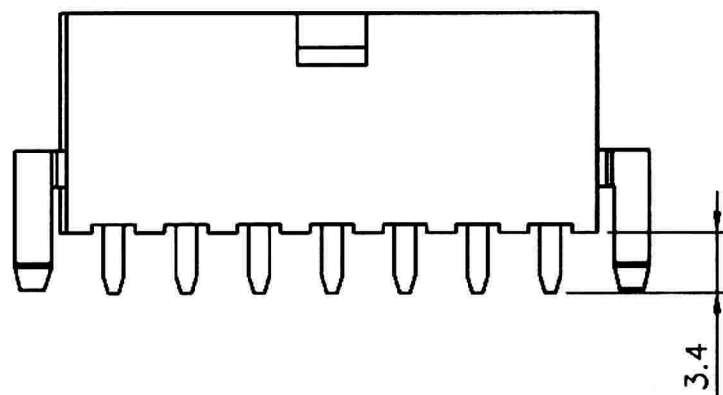


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAR.18'04
B		MODIFY TOL.	NOV. 25'05

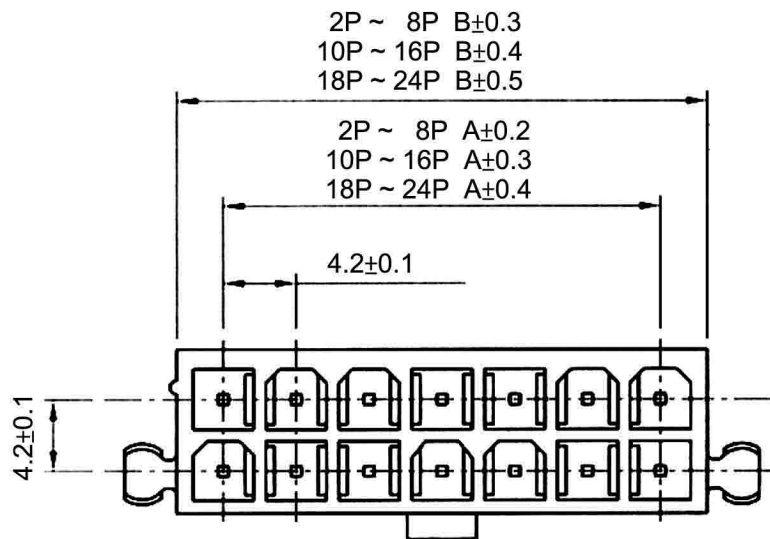


- Voltage Rating : 250V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000MΩ min.
- Temperature Range : -40°C to + 105°C
- Contact Resistance : 20mΩ max.

Material : Contact : Brass, Tin Plated

Base : Nylon 66 UL94V-2

Poles	Dimensions (mm)	
	A	B
2	-----	5.60
4	4.20	9.80
6	8.40	14.00
8	12.6	18.20
10	16.8	22.40
12	21.0	26.60
14	25.2	30.80
16	29.4	35.00
18	33.6	39.20
20	37.8	43.40
22	42.0	47.60
24	46.2	51.80

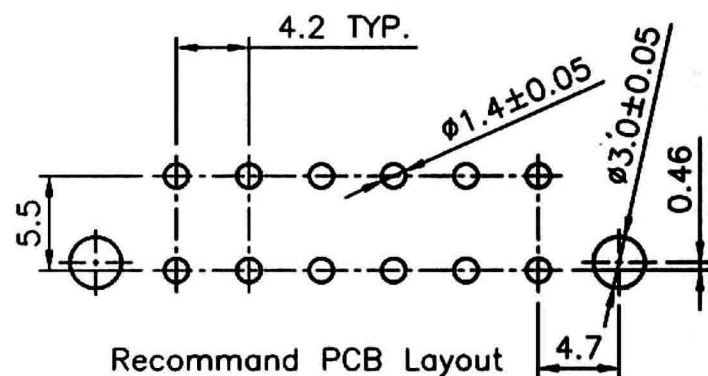

Recommmand PCB Layout

RoHs Compliant

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINEAR	ANGLE
X. ±	X° ±
.X ±	.X° ±
.XX ±	.XX° ±
.XXX ±	.XXX° ±
APPD	
CHKD	
DRAW	Z

PROJECTION	UNITS	SCALE	SIZE
MM	MM	SCALE	A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
4. 20MM MINI-FIT
POWER CONNECTOR
CPART NO.

PART NO. 1151**ST/RH

CAD NO. I056
F:\DRW\HW\HW- A0029

SHEET
1 OF 1

圖面編號:GTKSD1241-B(1)