

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	OCT'03'03

■ SPECIFICATIONS


- Voltage Rating : 250 V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 40 $^{\circ}$ C to + 105 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ WAFER

- Part No. : 1150**RT (Right Angle)
- Poles : 2-24
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-2
- Q' ty : 1000 pcs./Bag

Poles	Part No.	Dimensions(mm)	
		A	B
2	115202	----	5.60
4	115204	4.20	9.80
6	115206	8.40	14.00
8	115208	12.60	18.20
10	115210	16.80	22.40
12	115212	21.00	26.60
14	115214	25.20	30.80
16	115216	29.40	35.00
18	115218	33.60	39.20
20	115220	37.80	43.40
22	115222	42.00	47.60
24	115224	46.20	51.80

Recommand PCB Layout

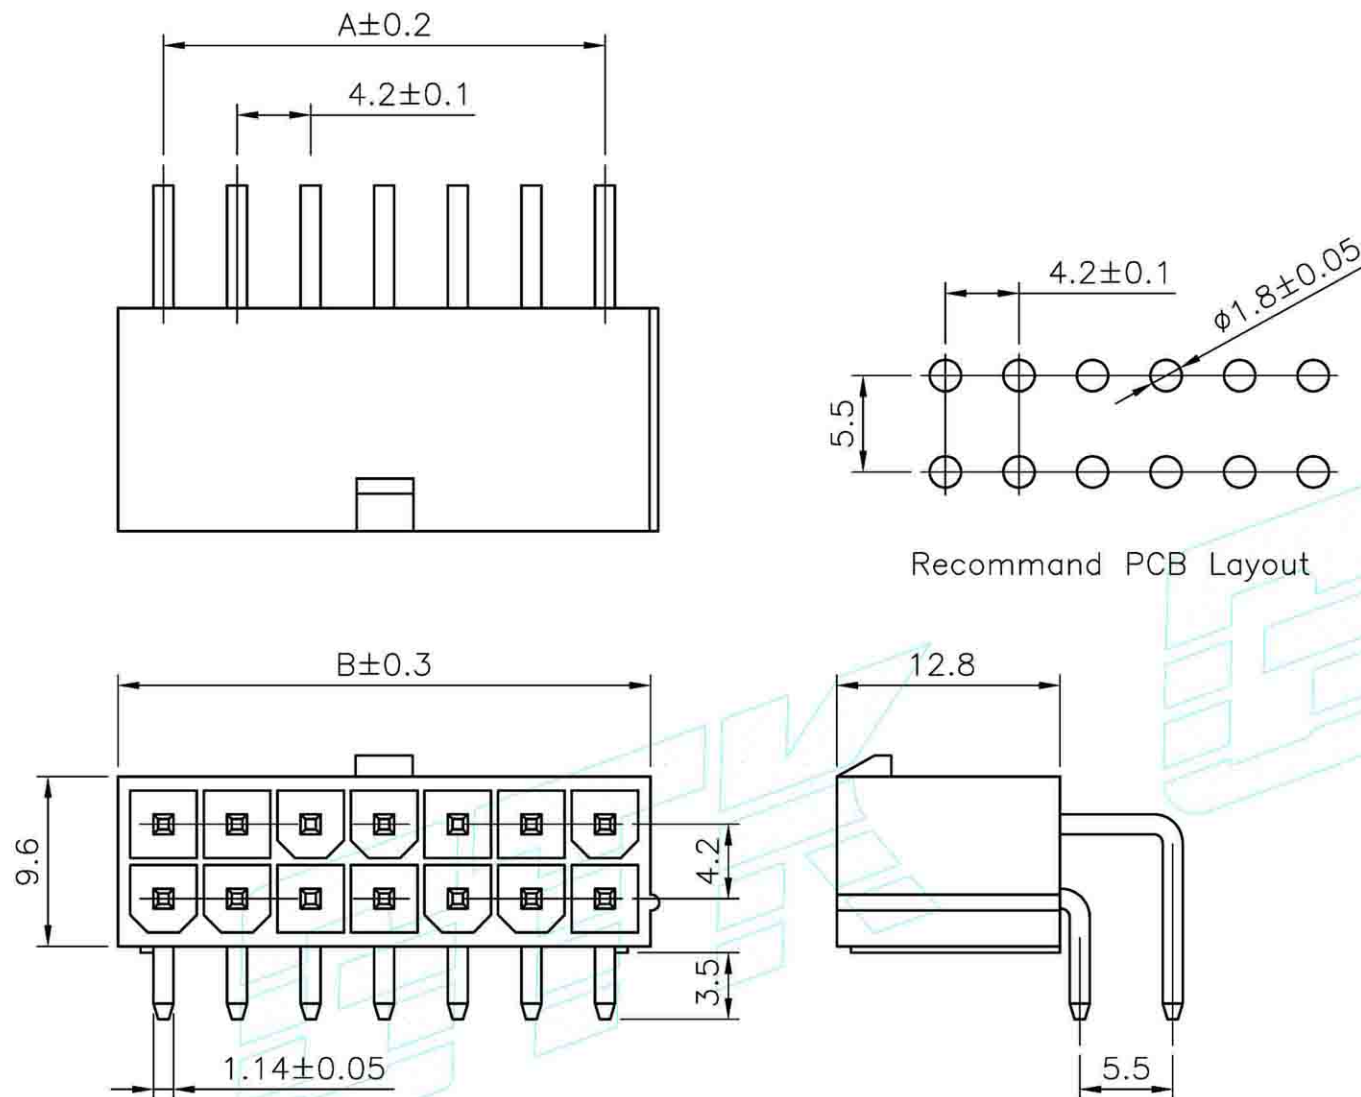

TOLERANCE UNLESS OTHERWISE SPECIFIED		
LINEAR	ANGLE	
X. ±	X° ±	
.X ±	.X° ±	
.XX ±	.XX° ±	
.XXX±	.XXX°±	
APPD		
CHKD		
DRAW	Z	OCT.03'03

PROJECTION	
UNITS	MM
SCALE	
SIZE	A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
4.20mm PITCH
POWER CONNECTOR
CPART NO.

PART NO.
1152**RT

CAD NO.
F:\DRW\HW\HW-0028

SHEET
1 OF 1

圖面編號:GTKSD1165-A(1)