
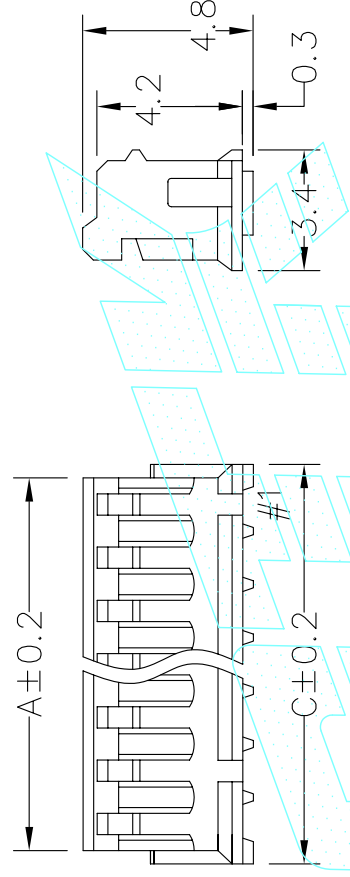


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUN.10.02
B		MODIFY PART_NO	SEP.23.02

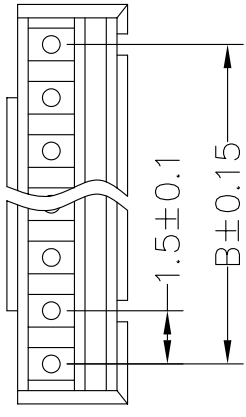

SPECIFICATION



- *Poles: 2~13
- *Voltage rating: AC, DC, 50V
- *Current Rating: 0.7A, AC, DC
- *Withstand voltage: 500V AC/minute
- *Insulation resistance: 500MΩ min
- *Temperature range: -25°C ~ +85°C
- *Applicable PC-board thickness: 0.6~1.2mm
- *Contact resistance: Initial Value/10mΩ max
After environmental testing/20mΩ max

HOUSING

- *Part No: 1173**
- *Poles: 2~13
- *Material: Nylon 66 UL 94V-0
- *Q'ty: 1000pcs/bag

Note: 1173**(JST ZHR Series Equivalent)

POLES	A	B	C	POLES	A	B	C
02	3.30	1.50	4.50	08	12.30	10.50	13.50
03	4.80	3.00	6.00	09	15.00	13.80	15.00
04	6.30	4.50	7.50	10	16.50	15.30	16.50
05	7.80	6.00	9.00	11	18.00	16.80	18.00
06	9.30	7.50	10.50	12	19.50	18.30	19.50
07	10.80	9.00	12.00	13	21.00	19.80	21.00



TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGLE	UNITS
LINEAR	X' ±	MM
	.X ± 0.3	
	.XX ±	
	.XXX ±	
APPD	.XXX ±	
CHKD		
DRAW/Tao.Tao.	SEP.23.2002	A4

GOLD-TEK ELECTRIC CO., LTD.

PART NO. 1173**
 CAD NO. I056
 F:\Drw\HW\HW-A0009

SHEET 1 OF 1
圖面編號:GTKSD0983-B(1)