


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL.21'03

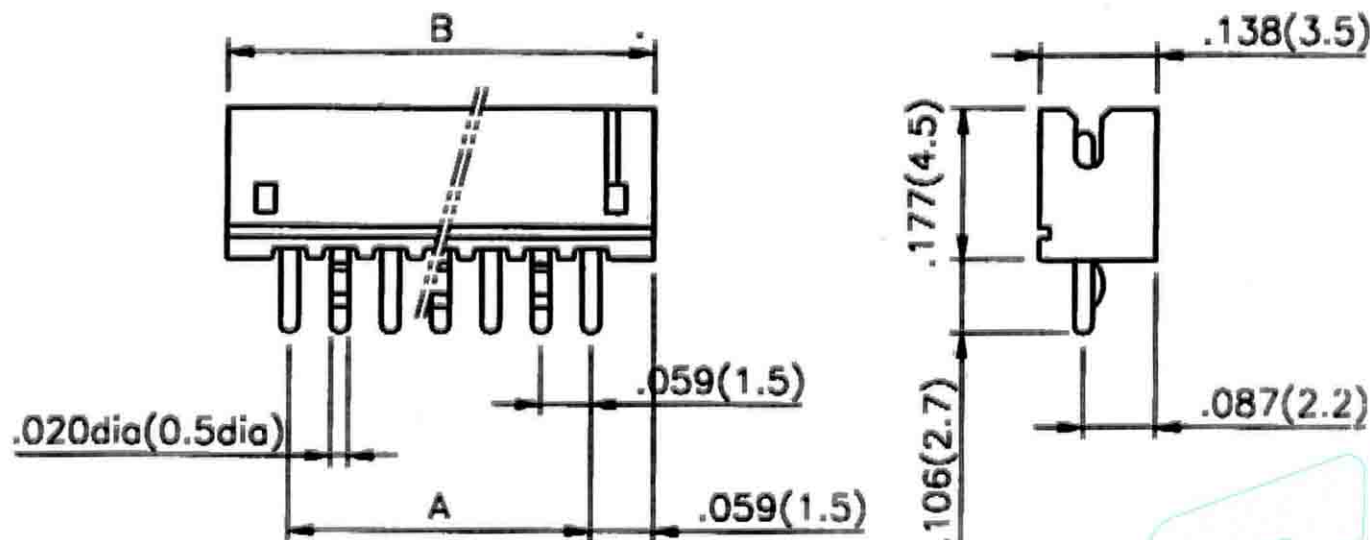


SPECIFICATIONS

- Pole : 2 - 13
- Voltage rating : 50V AC, DC
- Current rating : 0.7A AC, DC
- Withstanding voltage : 500V AC/minute
- Insulation resistance : 500M Ω min.
- Temperature range : -25°C to +85°C
(Including temperature rise in applying electrical current)
- Applicable PC board thickness : 0.024"-0.047"(0.6mm-1.2mm)
- Contact resistance : Initial value/10m Ω max.
After environmental testing/20m Ω max.

WAFER

- Part No.: 1174**ST
- Poles: 2-13
- Material: Contact:Brass,Tin plated
Base:Nylon 66 UL94V-0
- Q'ty: 1000 pcs/bag

Poles	Part No.	Dimensions In. (mm)		Material
	Top entry type	A	B	
2	1174-02	.059 (1.5)	.177 (4.5)	Nylon 66 UL94V-0
3	1174-03	.118 (3.0)	.236 (6.0)	
4	1174-04	.117 (4.5)	.295 (7.5)	
5	1174-05	.236 (6.0)	.354 (9.0)	
6	1174-06	.295 (7.5)	.413 (10.5)	
7	1174-07	.354 (9.0)	.472 (12.0)	
8	1174-08	.413 (10.5)	.531 (13.5)	
9	1174-09	.472 (12.0)	.591 (15.0)	
10	1174-10	.513 (13.5)	.650 (16.5)	
11	1174-11	.591 (15.0)	.709 (18.0)	
12	1174-12	.650 (16.5)	.768 (19.5)	
13	1174-13	.709 (18.0)	.827 (21.0)	

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
				
LINEAR		UNITS	TITLE	PART NO. 1174**ST
ANGLE				
X. ±	X° ±			
.X ±	.X° ±			
.XX ±	.XX° ±			
.XXX±	.XXX° ±	MM		
SCALE		CPART NO.	CAD NO. F:DRWHWHW-A0022	
			SHEET	
			1 OF 1	
APPD				
CHKD				
DRAW		SIZE	圖面編號:GTKSD1117-A(1)	
Z		A4		
JUL.21'03				