


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	FEB.16'04

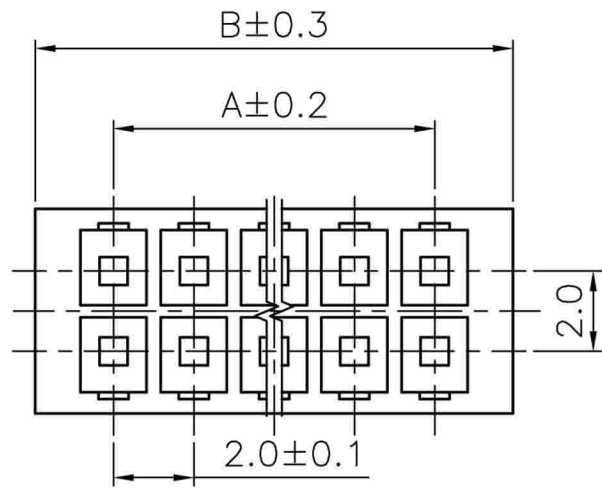



■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max

■ HOUSING

- Part No. : 2007**
- Poles : 3x2 - 16x2
- Material : Nylon 66 UL94V-0
- Q' ty: 1,000 pcs./Bag

CIRCUIT 1

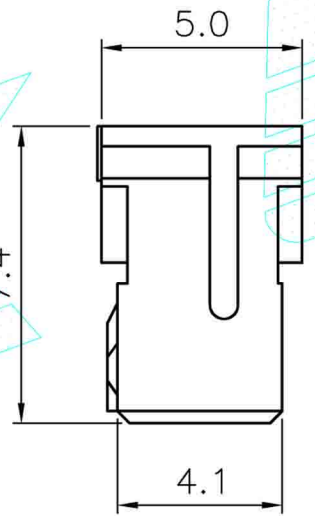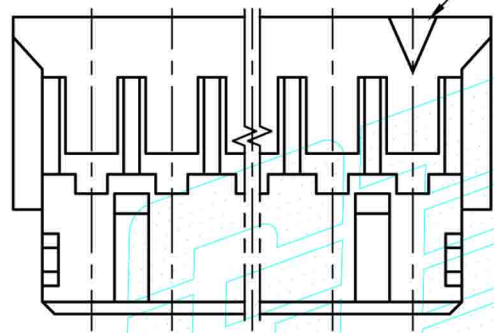

Poles	Part No.	Dimensions(mm)	
		A	B
3x2	200706	4.00	7.90
4x2	200708	6.00	9.90
5x2	200710	8.00	11.90
6x2	200712	10.00	13.90
7x2	200714	12.00	15.90
8x2	200716	14.00	17.90
9x2	200718	16.00	19.90
10x2	200720	18.00	21.90
11x2	200722	20.00	23.90
12x2	200724	22.00	25.90
13x2	200726	24.00	27.90
14x2	200728	26.00	29.90
15x2	200730	28.00	31.90
16x2	200732	30.00	33.90

TOLERANCE UNLESS OTHERWISE SPECIFIED		
LINEAR	ANGLE	
X. ±	X° ±	
.X ±	.X° ±	
.XX ±	.XX° ±	
.XXX±	.XXX° ±	
APPD		
CHKD		
DRAW	Z	FEB. 16' 2004

PROJECTION	
UNITS	MM
SCALE	
SIZE	A4

GTK
 TITLE
 2.00mm PITCH
 HOUSING
 CPART NO.

GOLD-TEK ELECTRIC CO., LTD.

PART NO.	2007**
CAD NO.	F:\DRW\HW\HW-0049
SHEET	1 OF 1

圖面編號:GTKSD1230-A(1)