

1

2

3

4

5

## Specifications:

Current Rating: 2.0A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 20m Ohm Max.

Insulation Resistance: 1000M Ohm Min.

Withstanding Voltage: 500V AC/Minute

Temperature Rating: -40°C To +105°C

## Materials and Finish:

△ Insulator: High Temperature Plastic/Thermoplastic (UL94V-0)

Insulator Color: Black

Contact: Copper Alloy

Plating: Gold/Matte Tin/Selective Gold Plated

## How To Order

2208S-XXX-007-XX △

Blank PBT △

F2:Nylon 6T





G:Gold Plated

MT:Matte Tin Plated

SG:Gold Plated On Contact Area,  
Matte Tin Plated On Solder Tail.



No. Of Contacts

Straight Type

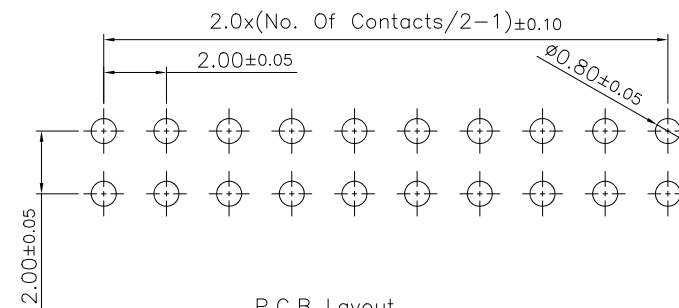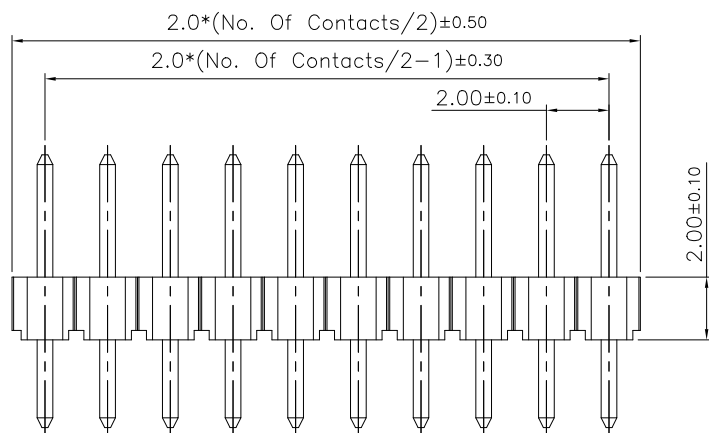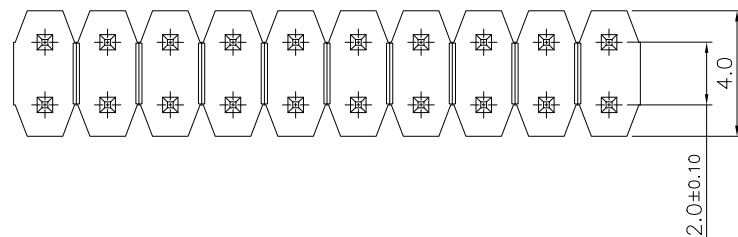

P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 <b>Neltron Industrial Co., Ltd.</b>	DESCRIPTION:	SIZE			
E			JAMIE	.X=±0.20 .XX=±0.15	UNIT: MM SCALE: 1:1 SHEET: 1/1 PROJECTION: 				2.0mm Pin Header Straight Type	A4	
D			CHECKED:								PART NO:
C			JERRY								
B	27-NOV-2024	△	YIZHEN	APPROVAL:							
A	04-JUL-2023	(P0001)	JAMIE	RORY							
REV	DATE	FILE	BY								