





1

2

3

4

5

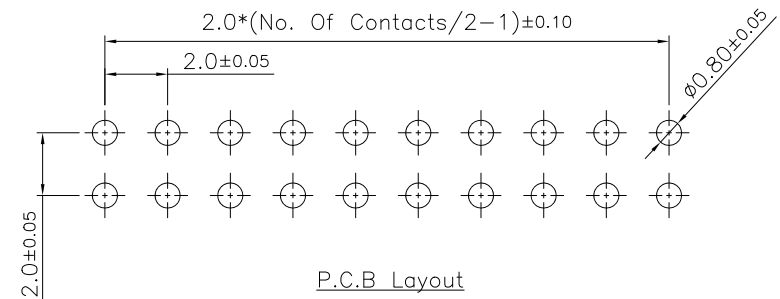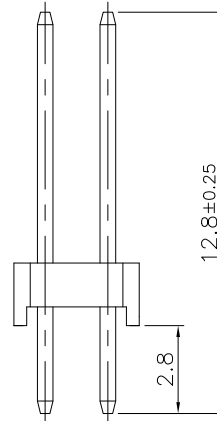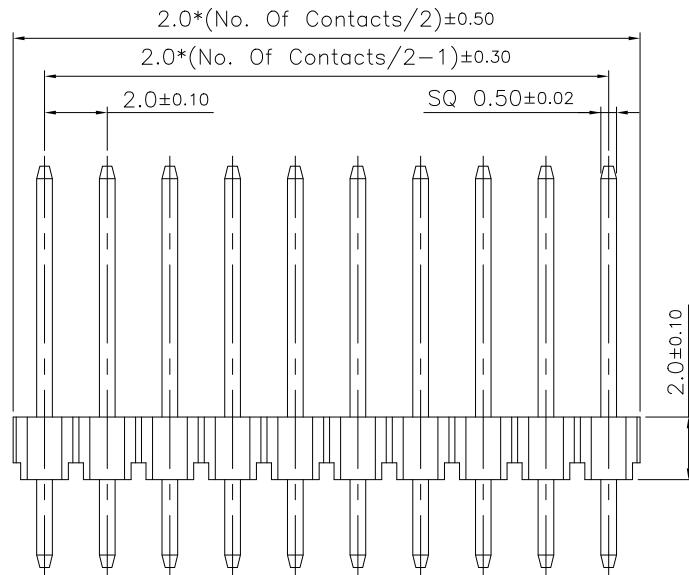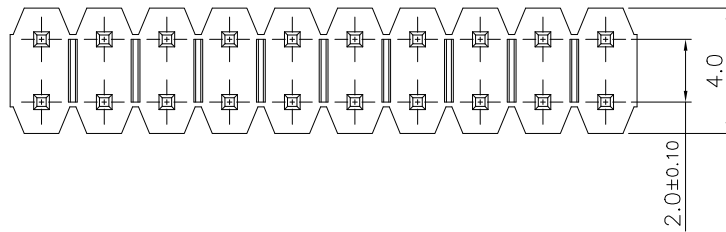

Specifications:

Current Rating: 2.0A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 20m Ohm Max.

Insulation Resistance: 1000M Ohm Min.

Withstanding Voltage: 500V AC/Minute

Temperature Rating: -40°C To +105°C

Materials and Finish:

Insulator: Thermoplastic (UL94V-0)

Insulator Color: Black

Contact: Copper Alloy

Plating: Gold/Matte Tin/Selective Gold Plated

How To Order

2208S-XXX-036

G:Gold Plated

MT:Matte Tin Plated

SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.

No. of Contacts

Straight Type

RoHS Compliant

F				DRAWN: Jamie Chuang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
E					
D				CHECKED: Jerry Chen	UNIT: MM
C					SCALE: 1:1
B				APPROVAL: Rory Chen	SHEET: 1/1
A	14-MAR-2025	(PC0643)	Jamie		PROJECTION:
REV	DATE	FILE	BY		


Neltron Industrial Co., Ltd.

DESCRIPTION:

2.0mm Pin Header Straight Type

PART NO:

2208S-XXX-036

SIZE

A4