




Coplanarity Information:

| Pin.No | Coplanarity |
|--------|-------------|
| 04-30P | 0.10        |
| 32-40P | 0.12        |
| 42-60P | 0.15        |
| 62-80P | 0.20        |

Specifications:  
Current Rating: 2.0A AC/DC  
Voltage Rating: 250V AC/DC  
Contact Resistance: 20m Ohm Max.  
Insulation Resistance: 1000M Ohm Min.  
Withstanding Voltage: 500V AC/Minute  
Temperature Rating: -40°C To +105°C

Materials and Finish:  
Insulator: High Temp. Plastic(UL94V-0)  
Insulator Color: Black  
Contact: Copper Alloy  
Plating: Gold/Matte Tin/Selective Gold Plated

How To Order  
2208SM-XXX-TB-004  
Tube  
G:Gold Plated  
MT:Matte Tin Plated  
SG:Gold Plated On Contact Area,  
Matte Tin Plated On Solder Tail.  
No. Of Contacts  
SMD Type

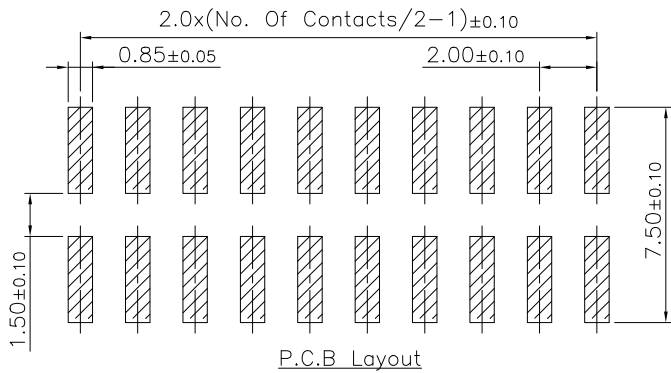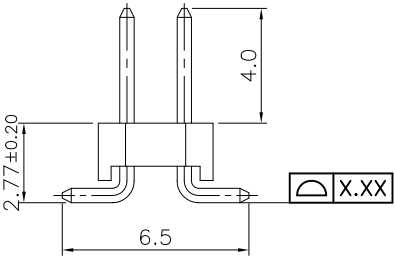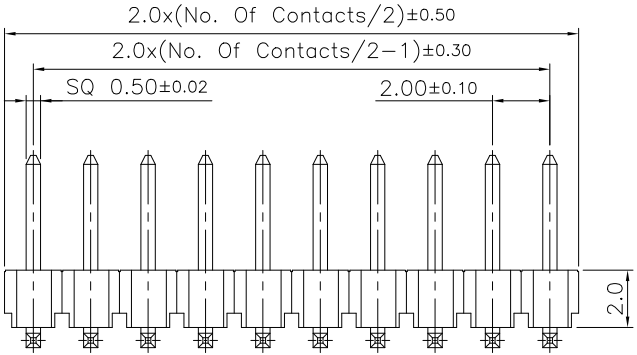

RoHS Compliant

|     |             |         |       |           |                       |                                                       |  |
|-----|-------------|---------|-------|-----------|-----------------------|-------------------------------------------------------|--|
| F   |             |         |       | DRAWN:    | GENERAL TOLERANCE:    | <b>Neltron Industrial Co., Ltd.</b>                   |  |
| E   |             |         |       | JAMIE     | .X=±0.20<br>.XX=±0.15 |                                                       |  |
| D   |             |         |       | CHECKED:  | UNIT: MM              | DESCRIPTION:<br>2.0mm Pin Header SMD Double Insulator |  |
| C   |             |         |       | JERRY     | SCALE: 1:1            |                                                       |  |
| B   |             |         |       | APPROVAL: | SHEET: 1/1            | PART NO:<br>2208SM-XXX-TB-004                         |  |
| A   | 14-JUN-2023 | (P0001) | JAMIE | RORY      | PROJECTION:           |                                                       |  |
| REV | DATE        | FILE    | BY    |           |                       | SIZE<br><b>A4</b>                                     |  |