

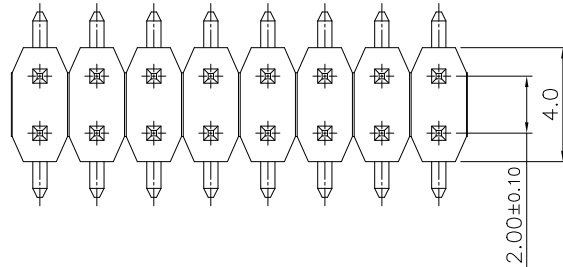
1

2





3

4

5



Coplanarity Information:

Pin. No	Coplanarity
04-30P	 0.10
32-40P	 0.12
42-60P	 0.15
62-80P	 0.20

Specifications:

Current Rating: 2.0A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 20m Ohm Max.

Insulation Resistance: 1000M Ohm Min.

Withstanding Voltage: 500V AC/Minute

Temperature Rating: -40°C To +105°C

Materials and Finish:

Insulator: High Temp. Plastic (UL94V-0)

Insulator Color: Black

Contact: Copper Alloy

Plating: Gold/Matte Tin/Selective Gold Plated

How To Order

2208SM-XXX-TB-016

Tube

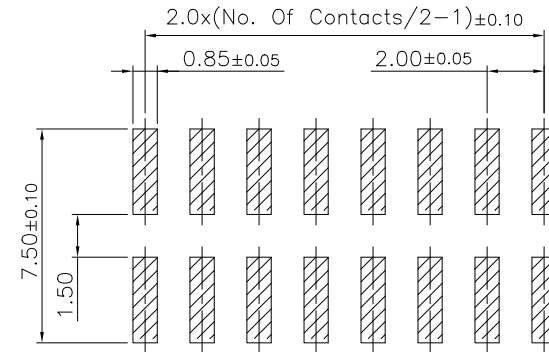
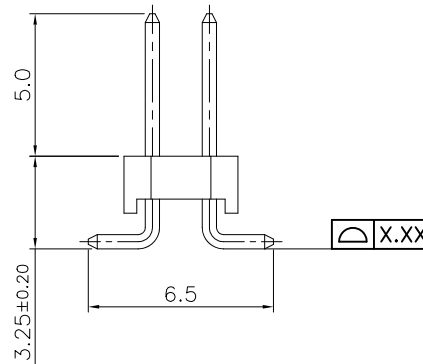
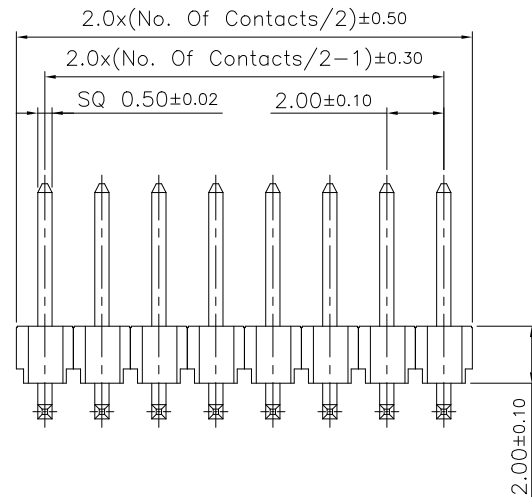
G:Gold Plated

MT:Matte Tin Plated

SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.


No. Of Contacts

SMD Type



P.C.B Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				LUCY	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				JERRY	SCALE: 1:1	2.0mm Pin Header SMD Double Insulator	A4
B				APPROVAL:	SHEET: 1/1	PART NO:	
A	20-OCT-2023	(P0001)	LUCY	RORY	PROJECTION: 	2208SM-XXX-TB-016	
REV	DATE	FILE	BY				