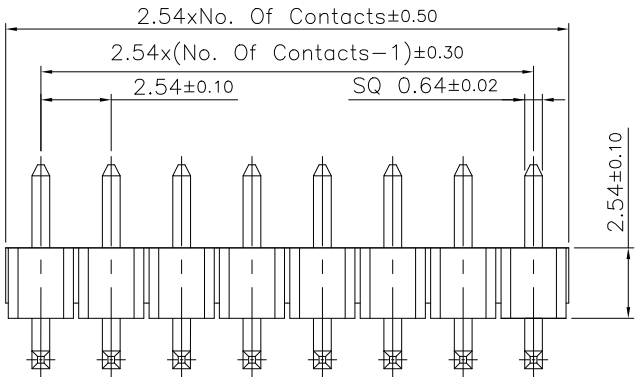
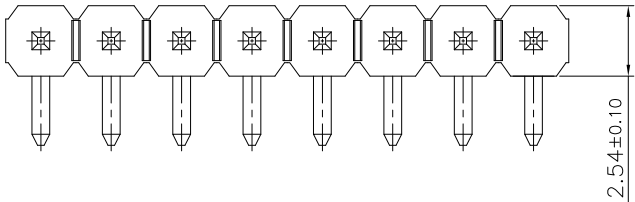


Specifications:
Current Rating: 3.0A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance: 20m ohm. Max.
Insulation Resistance: 1000M ohm. Min.
Withstanding Voltage: 500V AC For One Minute
Operating Temperature Range: -40°C To +105°C

Material and Finish
Insulator: Thermoplastic (UL94V-0)
Insulator Color: Black
Contact: Copper Alloy
Plating: Gold/Matte Tin/Selective Gold Plated

How To Order
2211R-XXX-068
G:Gold Plated
MT:Matte Tin Plated
SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.
No. Of Contacts
Right Angle Type

F				DRAWN: Yizhen Lee	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	Neltron Connectors Neltron Industrial Co., Ltd.		RoHS Compliant
E								
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Single Row Right Angle Type		SIZE A4
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1	PART NO: 2211R-XXX-068		D
A	07-NOV-2025	(P0001)	Yizhen		PROJECTION:			
REV	DATE	FILE	BY					