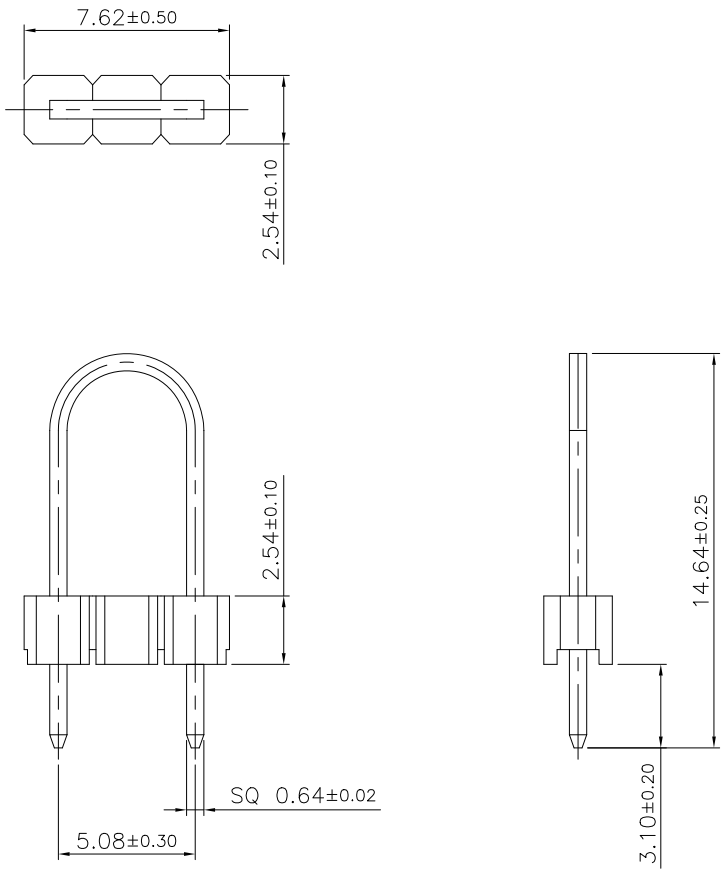

Specification:
Current rating: 3.0A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance: 20m ohm Max
Insulation Resistance: 1000M ohm Min
Withstanding Voltage: 500V AC For one Minute
Operating Temperature Range: −40°C To +105°C

Material:
Insulator: High Temperature Plastic (UL94V−0)
Insulator: Color: Black
Contact: Copper Alloy
Plated:Gold/Matte Tin/Selective Gold Plated

How To Order
2211U−03X−004−F5

- G:Gold Plated
  MT:Matte Tin Plated
  SG:Gold Plated On Contact Area,
  Matte Tin Plated On Solder Tail.
- No. Of Contacts
- U Type



P.C.B Layout

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C			
B			
A	05−SEP−2024	(PC0643)	LISY

DRAWN: LISY
CHECKED: JERRY
APPROVAL: RORY

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM
SCALE:
SHEET: 1/1
PROJECTION:

Neltron Connectors **Neltron Industrial Co., Ltd.**

DESCRIPTION: 2.54mm Pin Header U Type

PART NO: 2211U−03X−004−F5

SIZE **A4**