


1	2	3	4	5
---	---	---	---	---

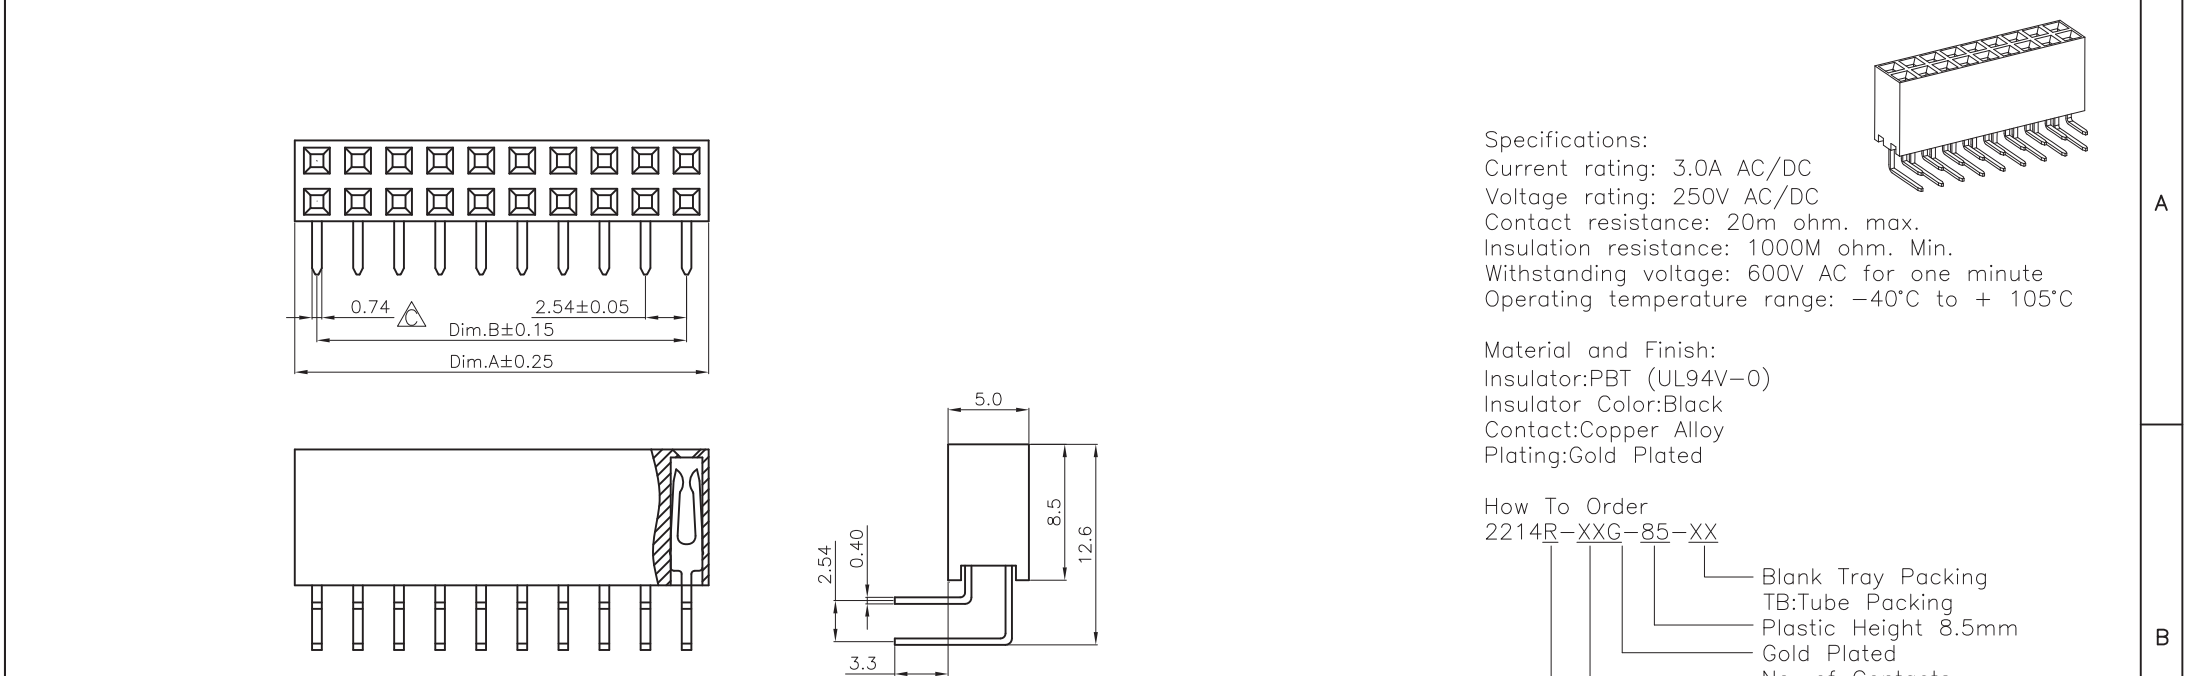

Dimension:

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
4	5.58	2.54	24	30.98	27.94	44	56.38	53.34	64	81.78	78.74
6	8.12	5.08	26	33.52	30.48	46	58.92	55.88	66	84.32	81.28
8	10.66	7.62	28	36.06	33.02	48	61.46	58.42	68	86.86	83.82
10	13.20	10.16	30	38.60	35.56	50	64.00	60.96	70	89.40	86.36
12	15.74	12.70	32	41.14	38.10	52	66.74	63.50	72	91.94	88.90
14	18.28	15.24	34	43.68	40.64	54	69.28	66.04	74	94.48	91.44
16	20.82	17.78	36	46.22	43.18	56	71.82	68.58	76	97.02	93.98
18	23.36	20.32	38	48.76	45.72	58	74.36	71.12	78	99.56	96.52
20	25.90	22.86	40	51.30	48.26	60	76.90	73.66	80	102.1	99.06
22	28.44	25.40	42	53.84	50.80	62	79.44	76.20			

Specifications:

Current rating: 3.0A AC/DC

Voltage rating: 250V AC/DC

Contact resistance: 20m ohm. max.

Insulation resistance: 1000M ohm. Min.

Withstanding voltage: 600V AC for one minute

Operating temperature range: -40°C to + 105°C

Material and Finish:

Insulator:PBT (UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

Plating:Gold Plated

How To Order

2214R-XXG-85-XX

Blank Tray Packing


TB:Tube Packing

Plastic Height 8.5mm

Gold Plated

No. of Contacts

Right Angle

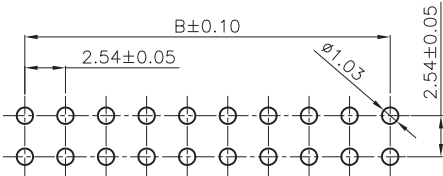

P.C.B. Layout

RoHS Compliant

F				DRAWN: JOY	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		DESCRIPTION: 2.54mm PCB Socket Double Row R/A Type	SIZE A4	D
E										
D	12-JUL-2022	Add Tube Option	Lisy	CHECKED: Jeremy Liu	UNIT: MM					
C	06-DEC-2006	ECN-CN061205	Wendy		SCALE:					
B	11-OCT-2004	ECN-CN041004	JOY	APPROVAL:	SHEET: 1/1					
A	02-OCT-2003		Jerry Chen		PROJECTION: 					
REV	DATE	FILE	BY	Mike Wu		PART NO: 2214R-XXG-85-XX				