



1

2


3

4


5

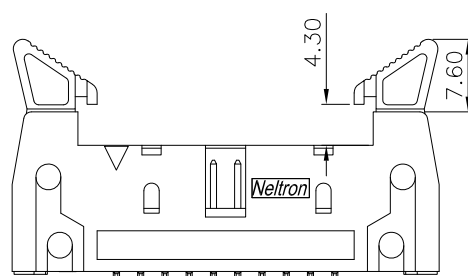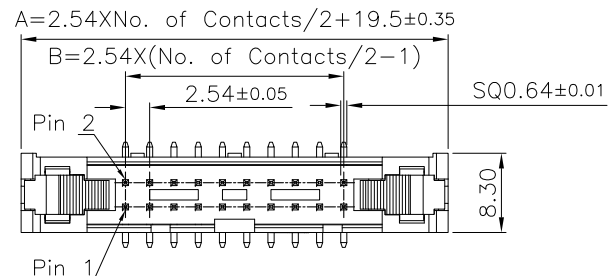


Short Ejector

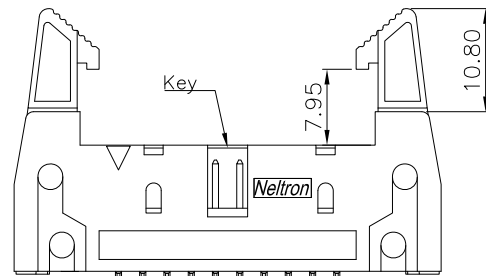

Long Ejector



Long Ejector(B Type)

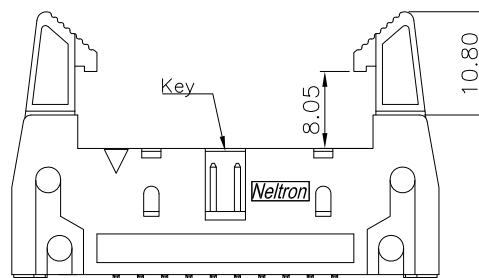

Specifications

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max

Insulation Resistance:1000M ohm. Min

Withstanding Voltage:600V AC For one minute

Operating Temperature Range : -40°C to +105°C

Material:

Insulator:High Temperature Plastic(UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

Plating:Gold/Tin/Selective Gold Plated

How To Order

2216SM-XXX-XX-XX-XX-H-X-F5

Blank without Neltron Logo

P:With Neltron Logo

Standard Color:Black

GR:Grey

Blank 6~40 Pin With One Key

1K:50~64 Pin With One Key

3K:50~64 Pin With Three Key

01:Short Ejector

02:Long Ejector

02B:Long Ejector(B Type)

G:Gold Plated

T:Tin Plated

SG:Selective Gold Plated


SG30:Selective Gold Plated 30U"

No. Of Contacts

SMD Type

Notes:
No. Of Positions 50~64 With Three Key
All Other Pin With One Key

No. of Contacts	Dim A	Dim B	No. of Contacts	Dim A	Dim B	Note
6	27.12	5.08	26	52.52	30.48	
8	29.66	7.62	30	57.60	35.56	
10	32.20	10.16	34	62.68	40.64	
12	34.74	12.70	40	70.30	48.26	
14	37.28	15.24	50	83.00	60.96	1K&3K
16	39.82	17.78	60	95.70	73.66	1K&3K
20	44.90	22.86	64	100.78	78.74	1K&3K
24	49.98	27.94				

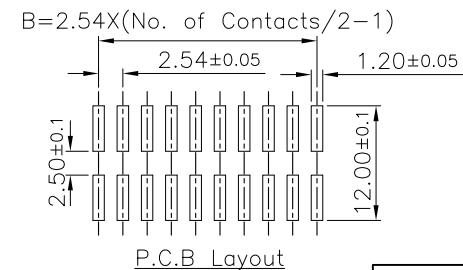

P.C.B Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Selin Lin	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				Jerry Chen	SCALE:	2.54mm Shrouded Header With Long Ejector SMD Type	A4
B				APPROVAL:	SHEET: 1/1	PART NO:	
A	26-JAN-2021	(P0001)	Selin Lin	Rory Chen	PROJECTION:	2216SM-XXX-XX-XX-XX-H-X-F5	
REV	DATE	FILE	BY				