

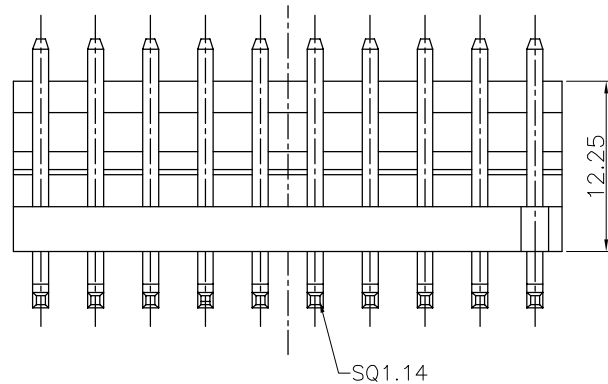
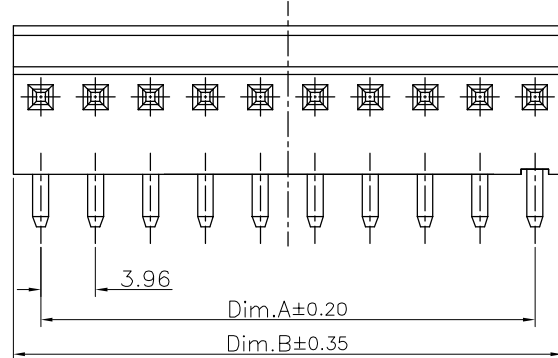




Dimension:

Pos	Dim. A	Dim. B	Pos	Dim. A	Dim. B
2	3.96	7.92	7	23.76	27.72
3	7.92	11.88	8	27.72	31.68
4	11.88	15.84	9	31.68	35.64
5	15.84	19.80	10	35.64	39.60
6	19.80	23.76			

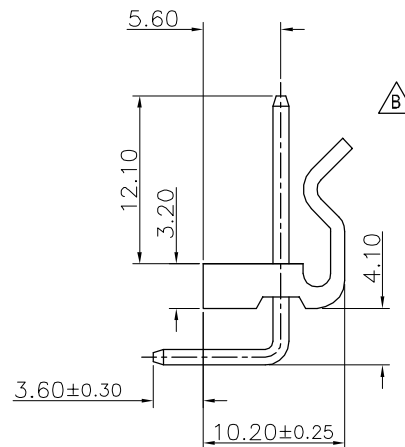

Specifications:

Current Rating: 7.0A AC, DC
Voltage Rating: 250V AC, DC
Contact Resistance: 10mohm Max
Insulation Resistance: 1000Mohm Min.
Withstanding Voltage: 1500V AC/minute
Operating Temperature Range: -40°C ~ +105°C


Material And Finish:

Insulator: Nylon 66 (UL94V-2)
Insulator Color: Transparence White
Terminal: Brass
Plating: Tin or Gold Plated

How to Order

2219R-XXX-XX

Blank UL94V-2
V0: UL94V-0
Blank Tin Plated
G: Gold Plated
No. of Contacts
Right Angle Type

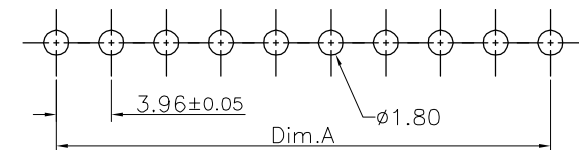

PCB LAYOUT

RoHS Compliant

				DRAWN: KiKi Lan	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 Neltron Industrial Co., Ltd.	
				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 3.96mm Wire to Board Wafer R/A Type	
					SCALE:1:1		
C	17-Apr-2019	Plastic Has Only One Gap	Jamie Wang	APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 2219R-XXX-XX	
B	24-JUL-2018	取消標註	Jamie Wang				
A	31-May-2016	(P0001)	KiKi Lan				
REV	DATE	FILE	BY		PROJECTION: 