

Specifications:

Current Rating:7.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:10m Ohm Max
 Insulation Resistance:1000M Ohm Min
 Withstanding Voltage:AC 1500V AC/Minute
 Operating Temperature:-40°C ~ +105°C

Materials:

Insulator:Nylon66 UL94V-2
 Color:Transparent White
 Terminal:Brass
 Plated:Tin or Gold Plated


How To Order

2219S-XXX-XX

- Blank UL94V-2
- V0:UL94V-0
- Blank Tin Plated
- G:Gold Plated
- No. of Contacts
- Straight Type

Dimension:

Pos	Dim. A	Dim. B	Pos	Dim. A	Dim. B
2	3.96	7.92	7	23.76	27.72
3	7.92	11.88	8	27.72	31.68
4	11.88	15.84	9	31.68	35.64
5	15.84	19.80	10	35.64	39.60
6	19.80	23.76			

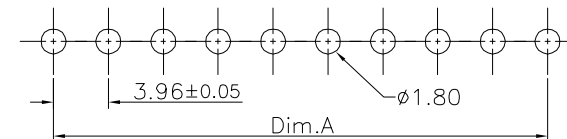

PCB LAYOUT

RoHS Compliant

				DRAWN: KiKi Lan	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	Neltron Industrial Co., Ltd.	
E				CHECKED: Jerry Chen	UNIT: MM		DESCRIPTION: 3.96mm Wire to Board Wafer Straight Type
D				APPROVAL: Mike Wu	SCALE:1:1	PART NO: 2219S-XXX-XX	A4
C	23-May-2019	Plastic Has Only One Gap 取消標註	Jamie Wang		SHEET: 1 / 1		
B	24-JUL-2018		Jamie Wang	PROJECTION:			
A	31-May-2016		KiKi Lan				
REV	DATE	FILE	BY				