
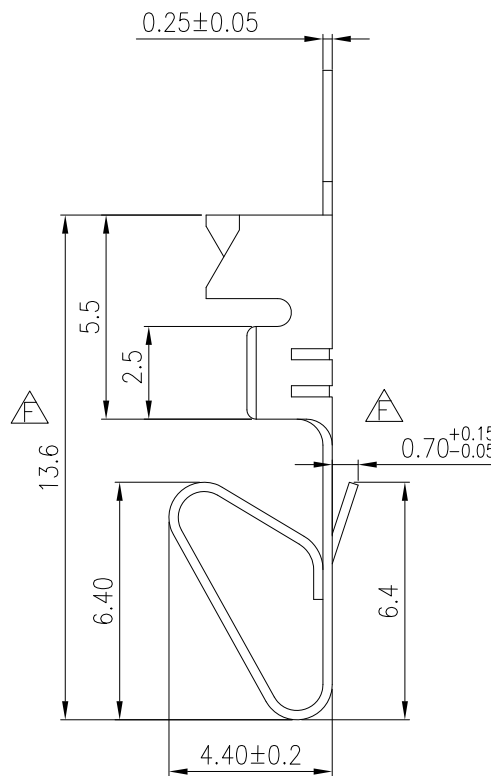
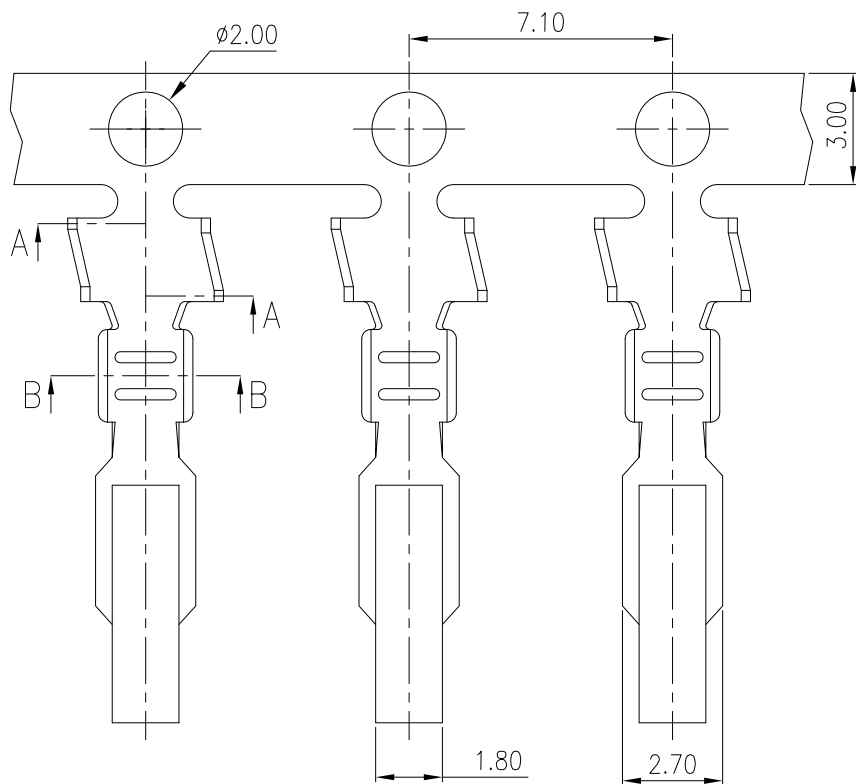



Specifications:


Current Rating: 7.0A AC/DC $\triangle$
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm. max.
 Withstanding Voltage: 1,500V AC/minute
 Operating Temperature Range: -40°C ~ +105°C
 Application Wires: AWG #22 to #18
 Mates With 2220H Series Housing
 Material and Finish
 Contact: Brass
 Finish: Tin Plated

How To Order

2220T
 T: Terminal



Section: A-A



Section: B-B

RoHS Compliant

F	17-Apr-2020	revise tolerance	Romina	DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E	23-Oct-2019	加包裝圖	Lisy	Art	.X=±0.2 .XX=±0.10 $\triangle$.XXX=±0.05		
D	09-Dec-2016	Amend Specifications	Art	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	04-NOV-2009	ECN-CN1008007	Art		SCALE: 1:1	3.96mm Wire To Board Crimp Terminal	A4
B	07-JAN-2009	(制五)字第20090106001號	Art		SHEET: 1/2	PART NO:	
A	28-MAR-2008	-(PC0001) (PC0605)	Art	APPROVAL:	PROJECTION: $\oplus$ ∇	2220T	
REV.	DATE	FILE	BY	Mike Wu			

