
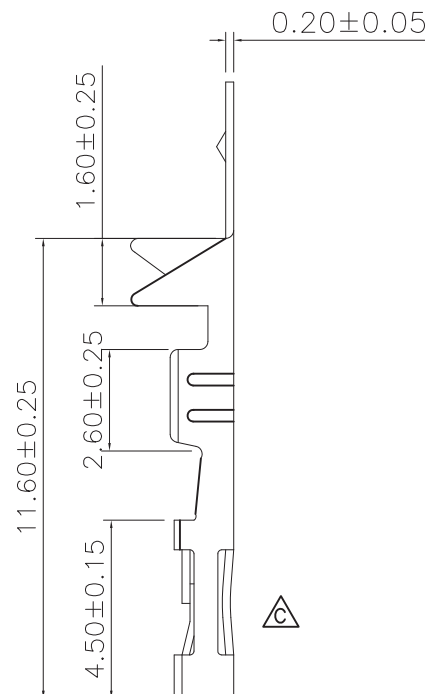
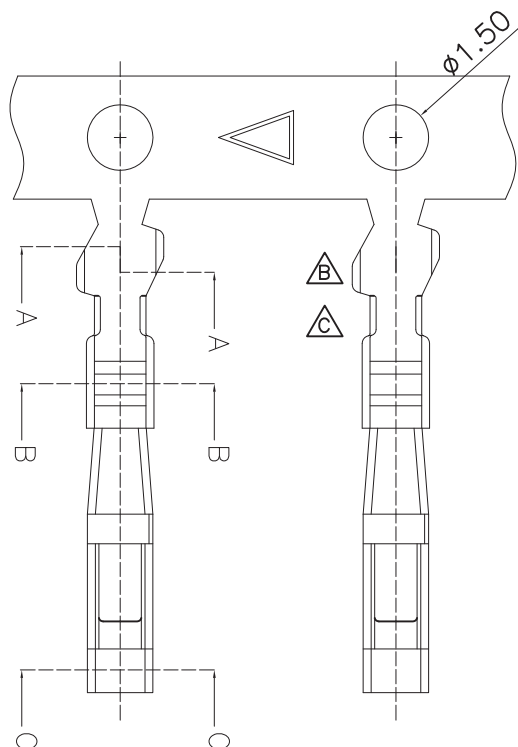



Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. max.
 Withstanding Voltage:800V AC/minute
 Operating Temperature Range:-25°C~+85°C
 Application Wires:AWG #22 to #28
 Insulation O.D:1.7mm(Max)
 Mates With 2226A/B Series Housing

Material and Finish
 Contact:Brass
 Finish:Gold Plated
 Packing:10,000pcs/Reel


How To Order
 2226TX
 T: Tin Plated
 G: Gold Plated
 T: Terminal



Section:A-A



Section:B-B



Section:C-C

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Allen	.X=±0.2 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	08-AUG-2019	修改外型&新增包裝圖	Lisy	Jerry Chen	SCALE: 1:1	2.54mm Wire To Board Crimp Terminal	A4
B	11-Dec-2018	圖面更新	Jack Huang	APPROVAL:	SHEET: 1/2	PART NO:	
A	08-APR-2013		Allen	Mike Wu	PROJECTION:	2226TX	
REV.	DATE	FILE	BY				