




1

2

3

4


5

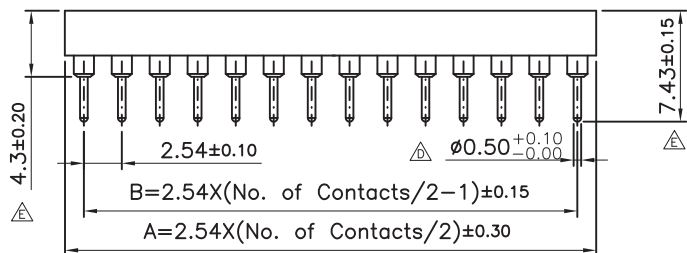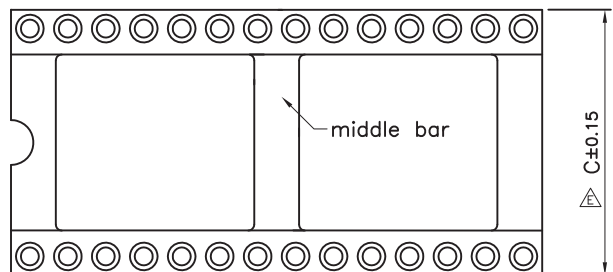

Specifications:

Current rating:3.0A AC/DC \triangle Voltage rating:60V AC/DC \triangle Contact resistance:20m ohm. max. \triangle Insulator resistance:1000M ohm at V=100V. Min. \triangle

Withstanding voltage:1000V AC for one minute

Operating temperature range:-25°C to +105°C \triangle 

Material and Finish:

Insulator:PBT (UL94V-0)

Standard Color:Black

Contact:Beryllium Copper(Becu),Gold Flash

Sleeve Barrel:Brass,Tin Plated

How To Order

2227MC-XXXX-XX-XX \triangle

Standard With middle bar

01:W/O middle bar

03: Space:7.62mm

06: Space:15.24mm

Blank:Gold Flash(Clip)


SG10:Gold Plated 10u"(Clip) \triangle

No. Of Contacts

MC:Machine Pin



Note1: W/O middle bar(6~16P)
With middle bar(18~48P) \triangle

Circuits	DIM.				Space	Circuits	DIM.				Space
	A	B	C	D			A	B	C	D	
4	5.08	2.54	10.18	7.62	03	24	30.48	27.94	17.80	15.24	06
6	7.62	5.08	10.18	7.62		28	35.56	33.02	17.80	15.24	
8	10.16	7.62	10.18	7.62		32	40.64	38.10	17.80	15.24	
10	12.70	10.16	10.18	7.62		40	50.80	48.26	17.80	15.24	
14	17.78	15.24	10.18	7.62		42	53.34	50.80	17.80	15.24	
16	20.32	17.78	10.18	7.62		48	60.96	58.42	17.80	15.24	
18	22.86	20.32	10.18	7.62							
20	25.40	22.86	10.18	7.62							
24	30.48	27.94	10.18	7.62							
28	35.56	33.02	10.18	7.62							

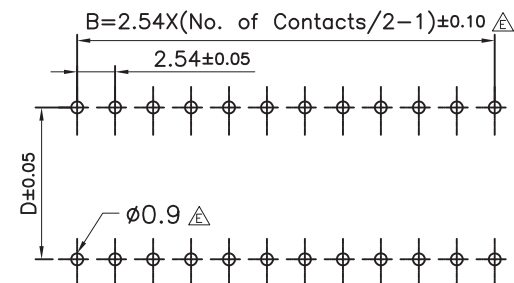

PCB Layout

RoHS Compliant

F	11-FEB-2022	ADD/Modify PIN \triangle	MEI	DRAWN: Allen	GENERAL TOLERANCE: .X=±0.38 .XX=±0.25 \triangle	 Neltron Industrial Co., Ltd.	DESCRIPTION: 2.54mm IC Socket Machine Pin	SIZE
E	16-MAR-2020	\triangle	JAMIE					
D	17-May-2016	ECN-TW1605012	Blake Huang	CHECKED: Jerry Chen	UNIT: MM	PART NO: 2227MC-XXXX-XX-XX	SIZE A4	
C	08-SEP-2009	ECN-TW090901	Allen		SCALE: 1:1			
B	05-SEP-2008	ECN-TW0800904	Allen	APPROVAL: Mike Wu	SHEET: 1/1	PROJECTION: 		
A	31-JUL-2008		Allen					
REV	DATE	FILE	BY					