


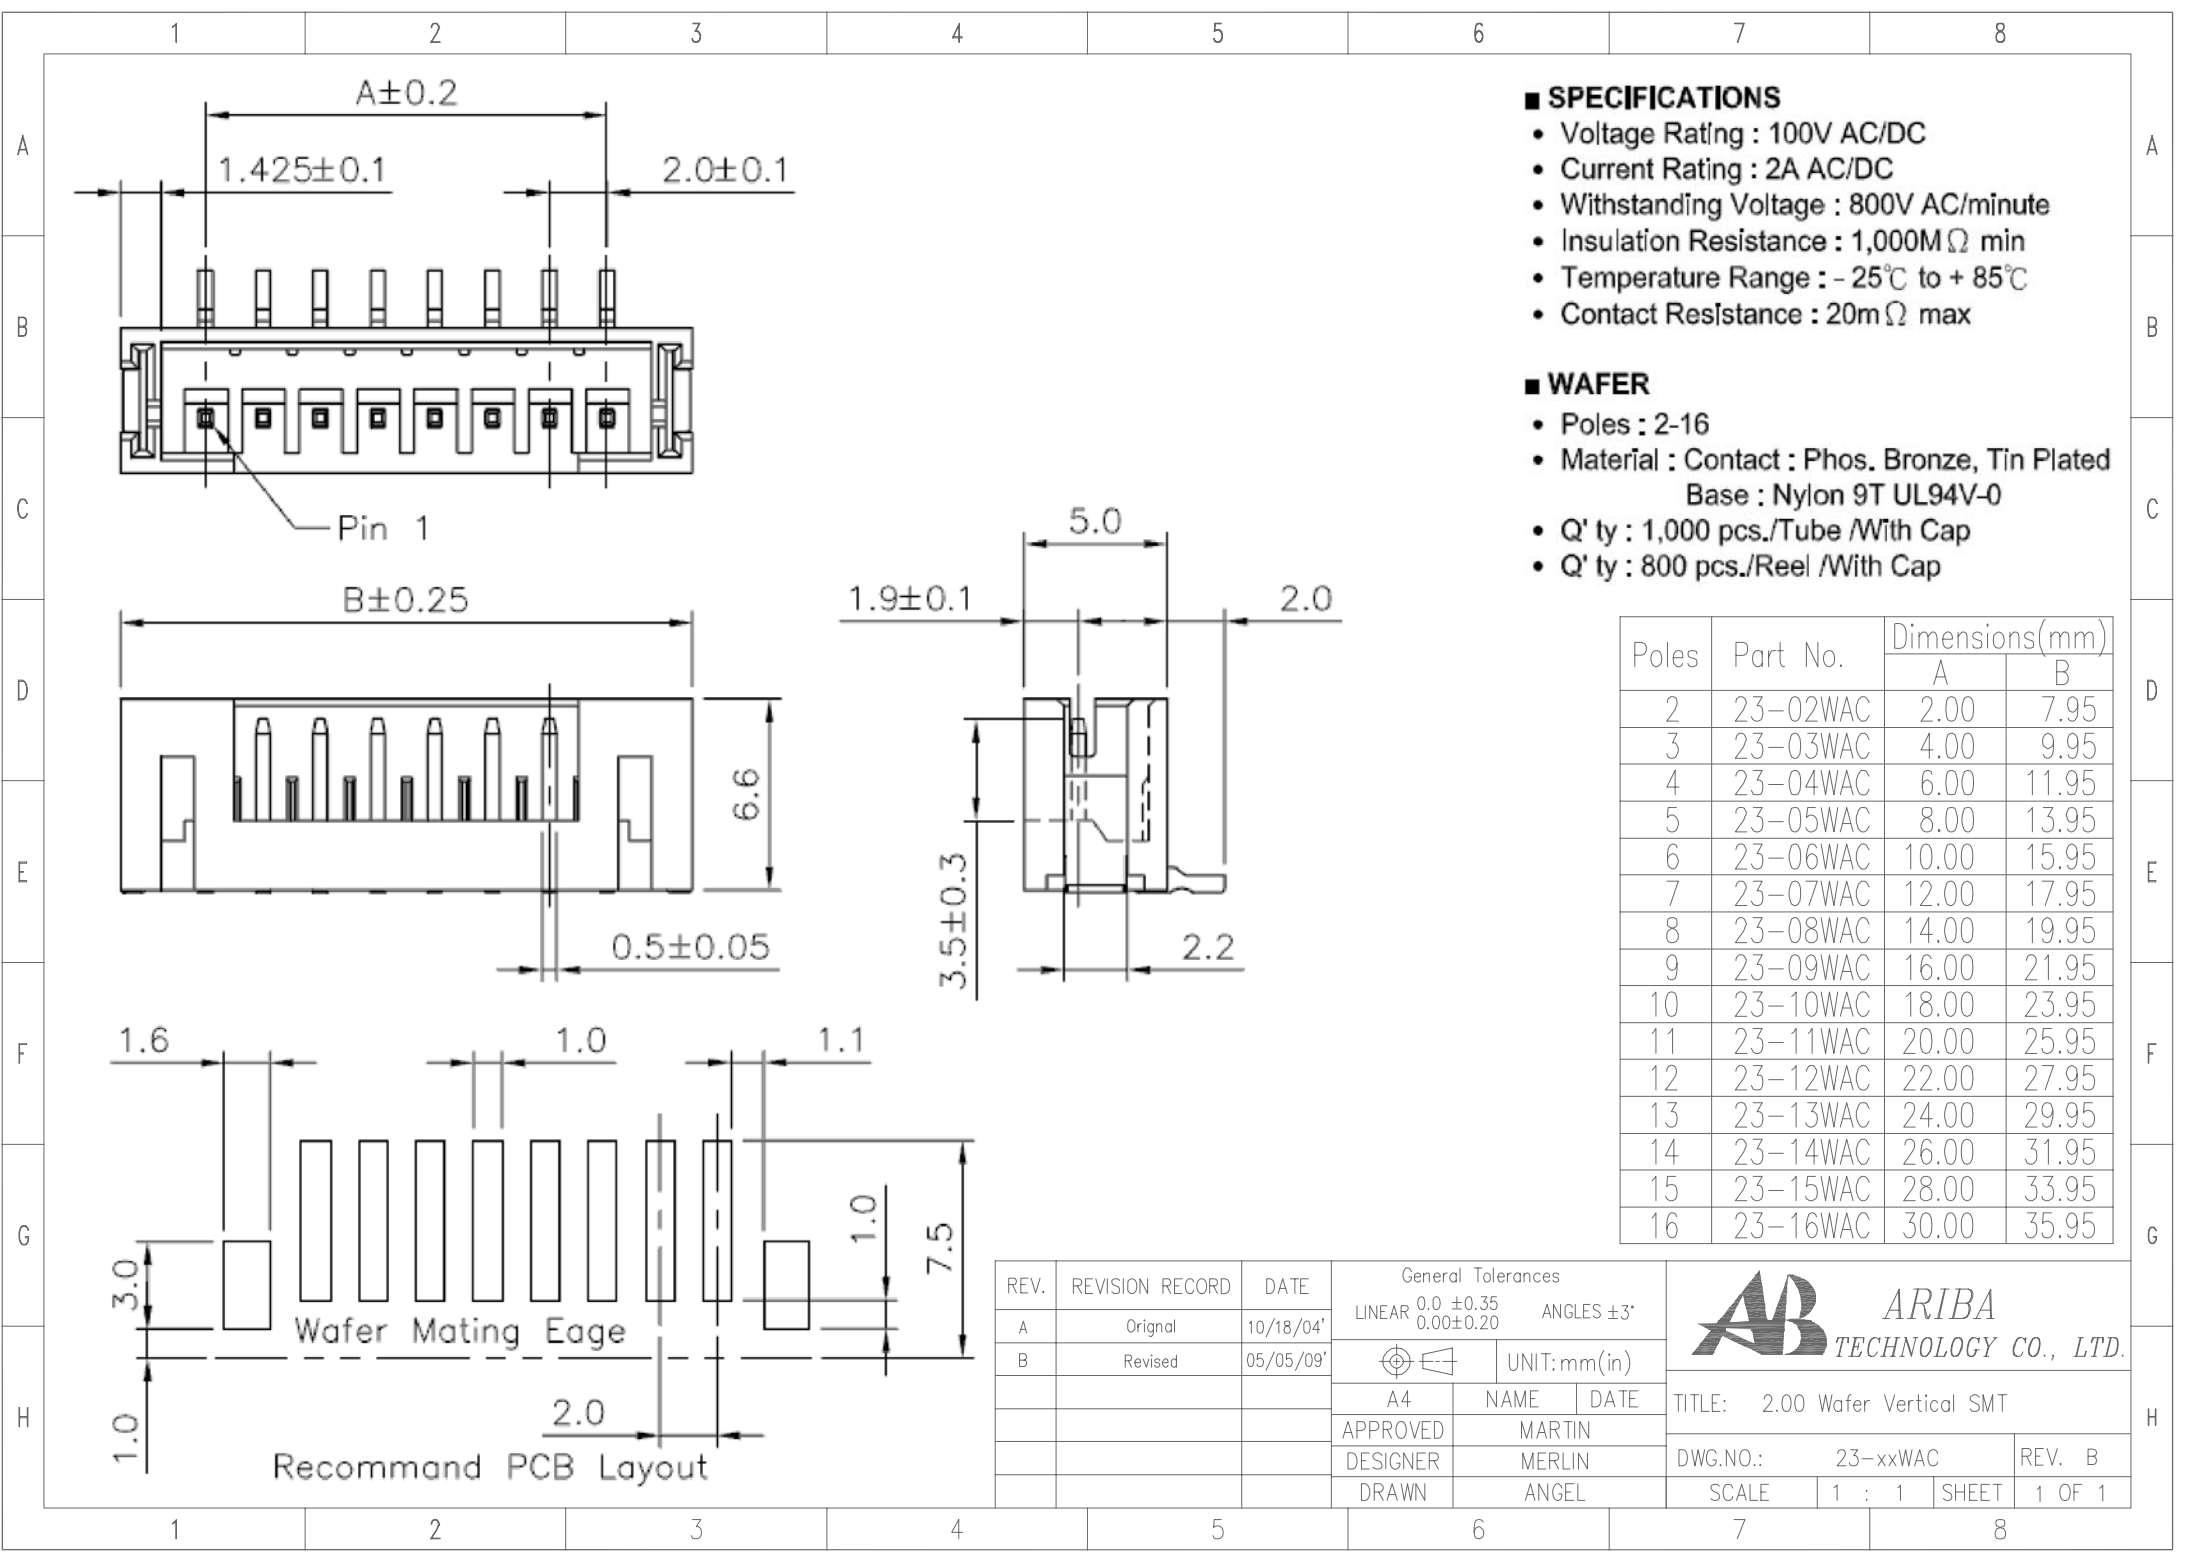

■ SPECIFICATIONS

- Voltage Rating : 100V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ WAFER

- Poles : 2-16
- Material : Contact : Phos. Bronze, Tin Plated
Base : Nylon 9T UL94V-0
- Q' ty : 1,000 pcs./Tube /With Cap
- Q' ty : 800 pcs./Reel /With Cap

Poles	Part No.	Dimensions(mm)	
		A	B
2	23-02WAC	2.00	7.95
3	23-03WAC	4.00	9.95
4	23-04WAC	6.00	11.95
5	23-05WAC	8.00	13.95
6	23-06WAC	10.00	15.95
7	23-07WAC	12.00	17.95
8	23-08WAC	14.00	19.95
9	23-09WAC	16.00	21.95
10	23-10WAC	18.00	23.95
11	23-11WAC	20.00	25.95
12	23-12WAC	22.00	27.95
13	23-13WAC	24.00	29.95
14	23-14WAC	26.00	31.95
15	23-15WAC	28.00	33.95
16	23-16WAC	30.00	35.95

REV.	REVISION RECORD	DATE	General Tolerances				ARIBA TECHNOLOGY CO., LTD.		
			LINEAR 0.0 ±0.35 0.00±0.20		ANGLES ±3°				
A	Original	10/18/04'		UNIT:mm(in)					
B	Revised	05/05/09'							
			A4	NAME	DATE	TITLE: 2.00 Wafer Vertical SMT			
			APPROVED	MARTIN					
			DESIGNER	MERLIN		DWG.NO.: 23-xxWAC		REV. B	
			DRAWN	ANGEL					
						SCALE	1 : 1	SHEET	1 OF 1