




W/O Kink

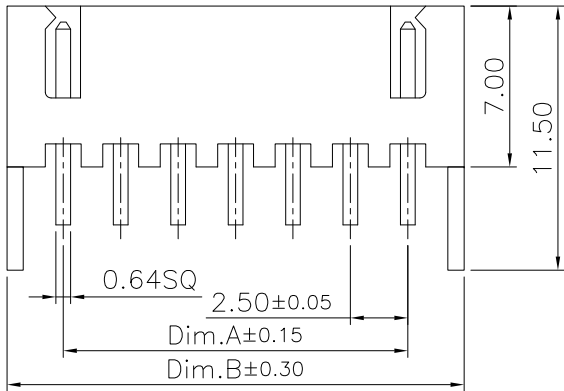

With Kink

Specifications:
Current rating:3.0 Amps
Voltage Rating:250V AC, DC
Contact resistance:10mohm Max.
Insulation resistance:1,000Mohm min.
Withstanding Voltage:1,000V AC For One Minute
Operating Temperature Rating:-25°C ~ +85°C




Materials and Finsih
Insulator:Nylon 66 (UL94V-0)
Insulator Color:White
Terminal:Brass
Plating:Gold or Tin Plated

How To Order
2317RJ-XXX-XX
Blank:With Kink(2~12P)
K0:W/O Kink(2~16;20P)
Blank:Tin Plated
G:Gold Plated
No. Of Contacts
Right Angle Type

Dimension: F

POS.	Dim.A	Dim.B	POS.	Dim.A	Dim.B	POS.	Dim.A	Dim.B
2	2.50	7.50	9	20.00	25.00	16	37.50	42.50
3	5.00	10.00	10	22.50	27.50	20	47.50	52.50
4	7.50	12.50	11	25.00	30.00			
5	10.00	15.00	12	27.50	32.50			
6	12.50	17.50	13	30.00	35.00			
7	15.00	20.00	14	32.50	37.50			
8	17.50	22.50	15	35.00	40.00			

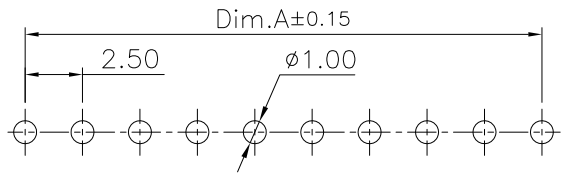

P.C.B Layout

RoHS Compliant

				DRAWN: ZHW	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	Neltron Industrial Co., Ltd.	
J	06-FEB-2023		Selin Lin	CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: 2.5mm Wire To Board Header DIP 90° Type	SIZE A4
I	24-Aug-2022	Add Packing List	Lucy Du		SCALE: 1:1		
H	06-Jul-2022		Selin Lin	APPROVAL: Mike Wu	SHEET: 1/2	PART NO: 2317RJ-XXX-XX	
G	30-Jul-2020	Modify Directions	Jamie Wang		PROJECTION:		
A	17-May-2006	(P0257)	ZHW				
REV	DATE	FILE	BY				